

# Lecture 11: Linearity and Shift-Invariance

Mark Hasegawa-Johnson

These slides are in the public domain.

ECE 401: Signal and Image Analysis, Fall 2023

1 Systems

2 Linearity

3 Shift Invariance

4 Written Example

5 Summary

# Outline


- 1 Systems
- 2 Linearity
- 3 Shift Invariance
- 4 Written Example
- 5 Summary

# What is a System?

A **system** is anything that takes one signal as input, and generates another signal as output. We can write

$$x[n] \xrightarrow{\mathcal{H}} y[n]$$

which means



# Example: Averager

For example, a weighted local averager is a system. Let's call it system  $\mathcal{A}$ .

$$x[n] \xrightarrow{\mathcal{A}} y[n] = \sum_{m=0}^6 g[m]x[n-m]$$

# Example: Time-Shift

A time-shift is a system. Let's call it system  $\mathcal{T}$ .

$$x[n] \xrightarrow{\mathcal{T}} y[n] = x[n - 1]$$

# Example: Square

If you calculate the square of a signal, that's also a system. Let's call it system  $\mathcal{S}$ :

$$x[n] \xrightarrow{\mathcal{S}} y[n] = x^2[n]$$

## Example: Add a Constant

If you add a constant to a signal, that's also a system. Let's call it system  $\mathcal{C}$ :

$$x[n] \xrightarrow{\mathcal{C}} y[n] = x[n] + 1$$



## Example: Window

If you chop off all elements of a signal that are before time 0 or after time  $N - 1$  (for example, because you want to put it into an image), that is a system:


$$x[n] \xrightarrow{\mathcal{W}} y[n] = \begin{cases} x[n] & 0 \leq n \leq N - 1 \\ 0 & \text{otherwise} \end{cases}$$

# Outline

- 1 Systems
- 2 Linearity
- 3 Shift Invariance
- 4 Written Example
- 5 Summary

# Linearity

A system is **linear** if these two algorithms compute the same thing:

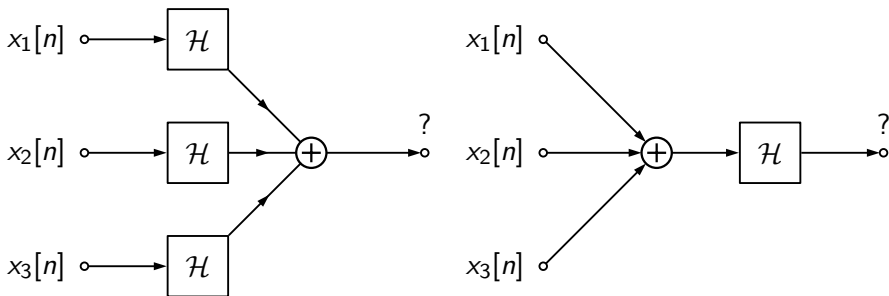

# Linearity

A system  $\mathcal{H}$  is said to be **linear** if and only if, for any  $x_1[n]$  and  $x_2[n]$ ,

$$x_1[n] \xrightarrow{\mathcal{H}} y_1[n]$$

$$x_2[n] \xrightarrow{\mathcal{H}} y_2[n]$$

implies that

$$x[n] = x_1[n] + x_2[n] \xrightarrow{\mathcal{H}} y[n] = y_1[n] + y_2[n]$$

In words: a system is **linear** if and only if, for every pair of inputs  $x_1[n]$  and  $x_2[n]$ , (1) adding the inputs and then passing them through the system gives exactly the same effect as (2) passing both inputs through the system, and **then** adding them.

# Special case of linearity: Scaling

Notice, a special case of linearity is the case when  $x_1[n] = x_2[n]$ :

$$x_1[n] \xrightarrow{\mathcal{H}} y_1[n]$$

$$x_1[n] \xrightarrow{\mathcal{H}} y_1[n]$$

implies that

$$x[n] = 2x_1[n] \xrightarrow{\mathcal{H}} y[n] = 2y_1[n]$$

So if a system is linear, then **scaling the input** also **scales the output**.

# Example: Averager

Let's try it with the weighted averager.

$$x_1[n] \xrightarrow{\mathcal{A}} y_1[n] = \sum_{m=0}^6 g[m]x_1[n-m]$$

$$x_2[n] \xrightarrow{\mathcal{A}} y_2[n] = \sum_{m=0}^6 g[m]x_2[n-m]$$

Then:

$$\begin{aligned}x[n] = x_1[n] + x_2[n] &= \sum_{m=0}^6 g[m] (x_1[n-m] + x_2[n-m]) \\ &= \left( \sum_{m=0}^6 g[m]x_1[n-m] \right) + \left( \sum_{m=0}^6 g[m]x_2[n-m] \right) \\ &= y_1[n] + y_2[n]\end{aligned}$$

...so a weighted averager is a **linear system**.

# Example: Square

A squarer is just obviously nonlinear, right? Let's see if that's true:

$$x_1[n] \xrightarrow{S} y_1[n] = x_1^2[n]$$

$$x_2[n] \xrightarrow{S} y_2[n] = x_2^2[n]$$

Then:

$$\begin{aligned} x[n] = x_1[n] + x_2[n] &\xrightarrow{A} y[n] = x^2[n] \\ &= (x_1[n] + x_2[n])^2 \\ &= x_1^2[n] + 2x_1[n]x_2[n] + x_2^2[n] \\ &\neq y_1[n] + y_2[n] \end{aligned}$$

...so a squarer is a **nonlinear system**.

## Example: Add a Constant

This one is tricky. Adding a constant seems like it ought to be linear, but it's actually **nonlinear**. Adding a constant is what's called an **affine** system, which is not necessarily linear.

$$x_1[n] \xrightarrow{C} y_1[n] = x_1[n] + 1$$

$$x_2[n] \xrightarrow{C} y_2[n] = x_2[n] + 1$$

Then:

$$\begin{aligned} x[n] = x_1[n] + x_2[n] &\xrightarrow{A} y[n] = x[n] + 1 \\ &= x_1[n] + x_2[n] + 1 \\ &\neq y_1[n] + y_2[n] \end{aligned}$$

...so adding a constant is a **nonlinear system**.



# What about the real world?

Suppose you're showing people images  $x[n]$ , and measuring their brain activity  $y[n]$  as a result. How can you tell if this system is linear?


- Show them one image, call it  $x_1[n]$ . Measure the resulting brain activity,  $y_1[n]$ .
- Show them another image,  $x_2[n]$ . Measure the brain activity,  $y_2[n]$ .
- Show them  $x[n] = x_1[n] + x_2[n]$ . Measure  $y[n]$ . Is it equal to  $y_1[n] + y_2[n]$ ?
- Repeat this experiment with lots of different images, and their sums, until you are convinced that the system is linear (or not).

# Outline

- 1 Systems
- 2 Linearity
- 3 Shift Invariance**
- 4 Written Example
- 5 Summary

# Shift Invariance

A system  $\mathcal{H}$  is **shift-invariant** if these two algorithms compute the same thing (here  $\mathcal{T}$  means “time shift”):

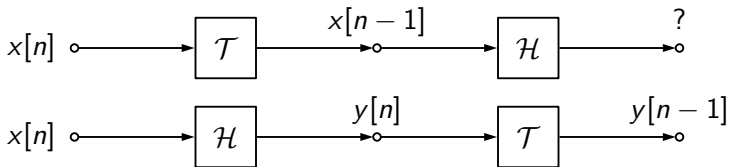

# Shift Invariance

A system  $\mathcal{H}$  is said to be **shift-invariant** if and only if, for every  $x_1[n]$ ,

$$x_1[n] \xrightarrow{\mathcal{H}} y_1[n]$$

implies that

$$x[n] = x_1[n - n_0] \xrightarrow{\mathcal{H}} y[n] = y_1[n - n_0]$$

In words: a system is **shift-invariant** if and only if, for any input  $x_1[n]$ , (1) shifting the input by some number of samples  $n_0$ , and then passing it through the system, gives exactly the same result as (2) passing it through the system, and then shifting it.

## Example: Averager

Let's try it with the weighted averager.

$$x_1[n] \xrightarrow{\mathcal{A}} y_1[n] = \sum_{m=0}^6 g[m]x_1[n-m]$$

Then:

$$\begin{aligned} x[n] = x_1[n-n_0] \xrightarrow{\mathcal{A}} y[n] &= \sum_{m=0}^6 g[m]x[n-m] \\ &= \sum_{m=0}^6 g[m]x_1[(n-m)-n_0] \\ &= \sum_{m=0}^6 g[m]x_1[(n-n_0)-m] \\ &= y_1[n-n_0] \end{aligned}$$

...so a weighted averager is a **shift-invariant system**.

# Example: Square

Squaring the input is a nonlinear operation, but is it shift-invariant? Let's find out:

$$x_1[n] \xrightarrow{\mathcal{S}} y_1[n] = x_1^2[n]$$

Then:

$$\begin{aligned} x[n] = x_1[n - n_0] &\xrightarrow{\mathcal{A}} y[n] = x^2[n] \\ &= (x_1[n - n_0])^2 \\ &= x_1^2[n - n_0] \\ &= y_1[n - n_0] \end{aligned}$$

...so computing the square is a **shift-invariant system**.

## Example: Windowing

How about windowing, e.g., in order to create an image?

$$x_1[n] \xrightarrow{w} y_1[n] = \begin{cases} x_1[n] & 0 \leq n \leq N - 1 \\ 0 & \text{otherwise} \end{cases}$$

If we shift the **output**, we get

$$y_1[n - n_0] = \begin{cases} x_1[n - n_0] & n_0 \leq n \leq N - 1 + n_0 \\ 0 & \text{otherwise} \end{cases}$$

... but if we shift the **input** ( $x[n] = x_1[n - n_0]$ ), we get

$$y[n] = \begin{cases} x[n] & 0 \leq n \leq N - 1 \\ 0 & \text{otherwise} \end{cases} = \begin{cases} x_1[n - n_0] & 0 \leq n \leq N - 1 \\ 0 & \text{otherwise} \end{cases} \\ \neq y_1[n - n_0]$$

... so windowing is a **shift-varying system** (not shift-invariant).

# How about the real world?

Suppose you're showing images  $x[n]$ , and measuring the neural response  $y[n]$ . How do you determine if this system is shift-invariant?

- Show an image  $x_1[n]$ , and measure the neural response  $y_1[n]$ .
- Shift the image by  $n_0$  columns to the right, to get the image  $x[n] = x_1[n - n_0]$ . Show people  $x[n]$ .
- Is the resulting neural response exactly the same, but shifted to a slightly different set of neurons (shifted “to the right?”) If so, then the system may be shift-invariant!
- Keep doing that, with many different images and many different shifts, until you're convinced the system is shift-invariant.



# Outline

- 1 Systems
- 2 Linearity
- 3 Shift Invariance
- 4 Written Example**
- 5 Summary

# Written Example

Prove that differentiation,  $y(t) = \frac{dx}{dt}$ , is a linear shift-invariant system (in terms of  $t$  as the time index, instead of  $n$ ).

# Outline

- 1 Systems
- 2 Linearity
- 3 Shift Invariance
- 4 Written Example
- 5 Summary

# Summary

- A system is **linear** if and only if, for any two inputs  $x_1[n]$  and  $x_2[n]$  that produce outputs  $y_1[n]$  and  $y_2[n]$ ,

$$x[n] = x_1[n] + x_2[n] \xrightarrow{\mathcal{H}} y[n] = y_1[n] + y_2[n]$$

- A system is **shift-invariant** if and only if, for any input  $x_1[n]$  that produces output  $y_1[n]$ ,

$$x[n] = x_1[n - n_0] \xrightarrow{\mathcal{H}} y[n] = y_1[n - n_0]$$