

Lecture 5: Fourier Analysis

Mark Hasegawa-Johnson

ECE 401: Signal and Image Analysis

- ① Review: Fourier Series
- ② Computing the Fourier Series Coefficients
- ③ Calculation Examples
- ④ Visualization Examples
- ⑤ Summary

Outline

- 1 Review: Fourier Series
- 2 Computing the Fourier Series Coefficients
- 3 Calculation Examples
- 4 Visualization Examples
- 5 Summary

Fourier Series

Any periodic signal, $x(t + T_0) = x(t)$, can be written as

$$x(t) = \sum_{k=-\infty}^{\infty} X_k e^{j2\pi kt/T_0}$$

In discrete time, you only need T_0 harmonics, because the period only has T_0 samples:

$$x[n] = \sum_{k=0}^{T_0-1} X_k e^{j2\pi kn/T_0}$$

Analysis and Synthesis

- **Fourier Synthesis** is the process of generating the signal, $x(t)$, given its spectrum. Last lecture, you learned how to do this, in general.
- **Fourier Analysis** is the process of finding the spectrum, X_k , given the signal $x(t)$. I'll tell you how to do that today.

Outline

- 1 Review: Fourier Series
- 2 Computing the Fourier Series Coefficients
- 3 Calculation Examples
- 4 Visualization Examples
- 5 Summary

Fourier Analysis

Fourier said that any periodic signal, with a period of T_0 seconds, can be written

$$x(t) = \sum_{k=-\infty}^{\infty} X_k e^{j2\pi kt/T_0}$$

What I want to do, now, is to prove that if you know $x(t)$, you can find its Fourier series coefficients using the following formula:

$$X_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j2\pi kt/T_0} dt$$

Important note: the integral can be over any complete period. We usually write it from 0 to T_0 , but it can be from $-\frac{T_0}{2}$ to $\frac{T_0}{2}$, or any other period.

Proof of Fourier Analysis: Step 1

$$\begin{aligned} & \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j2\pi kt/T_0} dt \\ &= \frac{1}{T_0} \int_0^{T_0} \left(\sum_{\ell=-\infty}^{\infty} X_{\ell} e^{j2\pi \ell t/T_0} \right) e^{-j2\pi kt/T_0} dt \\ &= \frac{1}{T_0} \sum_{\ell=-\infty}^{\infty} \int_0^{T_0} X_{\ell} e^{j2\pi(\ell-k)t/T_0} dt \end{aligned}$$

Now we need to find out what is $\int_0^{T_0} X_{\ell} e^{j2\pi(\ell-k)t/T_0} dt$.

Proof of Fourier Analysis: Step 2

$$\begin{aligned} & \int_0^{T_0} X_\ell e^{j2\pi(\ell-k)t/T_0} dt \\ &= \int_0^{T_0} X_\ell \cos\left(\frac{2\pi(\ell-k)t}{T_0}\right) dt + j \int_0^{T_0} X_\ell \sin\left(\frac{2\pi(\ell-k)t}{T_0}\right) dt \\ &= \begin{cases} 0 & \ell \neq k \\ \int_0^{T_0} X_\ell dt = T_0 X_\ell = T_0 X_k & \ell = k \end{cases} \end{aligned}$$

Proof of Fourier Analysis: Step 3

$$\begin{aligned} & \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j2\pi kt/T_0} dt \\ &= \frac{1}{T_0} \int_0^{T_0} \left(\sum_{\ell=-\infty}^{\infty} X_{\ell} e^{j2\pi \ell t/T_0} \right) e^{-j2\pi kt/T_0} dt \\ &= \frac{1}{T_0} \sum_{\ell=-\infty}^{\infty} \int_0^{T_0} X_{\ell} e^{j2\pi(\ell-k)t/T_0} dt \\ &= \frac{1}{T_0} \times (\cdots + 0 + 0 + 0 + T_0 X_k + 0 + 0 + \cdots) \\ &= X_k \end{aligned}$$

Fourier Series

- **Analysis** (finding the spectrum, given the waveform):

$$X_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j2\pi kt/T_0} dt$$

- **Synthesis** (finding the waveform, given the spectrum):

$$x(t) = \sum_{k=-\infty}^{\infty} X_k e^{j2\pi kt/T_0}$$

Outline

- 1 Review: Fourier Series
- 2 Computing the Fourier Series Coefficients
- 3 Calculation Examples**
- 4 Visualization Examples
- 5 Summary

Square wave example

Suppose that

$$x(t) = \begin{cases} 1 & 0 \leq t < T_1 \\ 0 & T_1 \leq t < T_0 \end{cases}$$

What is X_k ?

Square wave example

$$\begin{aligned} X_k &= \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j \frac{2\pi k t}{T_0}} dt \\ &= \frac{1}{T_0} \int_0^{T_1} e^{-j \frac{2\pi k t}{T_0}} dt \\ &= \begin{cases} \frac{T_1}{T_0} & k = 0 \\ \frac{1}{-j2\pi k} \left(e^{-j \frac{2\pi k T_1}{T_0}} - 1 \right) & k \neq 0 \end{cases} \end{aligned}$$

Cosine example

Suppose that $x(t) = \cos(2\pi f_1 t)$ for $0 \leq t < T_0$. Notice that there are two very different cases:

- If $f_1 T_0$ is not an integer, then $x(t)$ has a discontinuity:
 - As t approaches T_0 , $x(t)$ approaches $\cos(2\pi f_1 T_0)$.
 - When t reaches T_0 , $x(t)$ suddenly resets. $x(t)$ must be periodic, so $x(T_0) = x(0) = 1$.
- If $f_1 T_0$ is an integer, then $x(t)$ is continuous.

Cosine example when $f_1 T_0$ is not an integer

$$\begin{aligned} X_k &= \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j \frac{2\pi k t}{T_0}} dt \\ &= \frac{1}{T_0} \int_0^{T_0} \cos(2\pi f_1 t) e^{-j \frac{2\pi k t}{T_0}} dt \\ &= \frac{1}{T_0} \int_0^{T_0} \frac{1}{2} \left(e^{j 2\pi f_1 t} + e^{-j 2\pi f_1 t} \right) e^{-j \frac{2\pi k t}{T_0}} dt \\ &= \frac{1}{2T_0} \left(\int_0^{T_0} e^{-j \frac{2\pi(k-f_1 T_0)t}{T_0}} dt + \int_0^{T_0} e^{-j \frac{2\pi(k+f_1 T_0)t}{T_0}} dt \right) \\ &= \frac{1}{-j 4\pi(k-f_1 T_0)} \left(e^{-j 2\pi(k-f_1 T_0)} - 1 \right) \\ &\quad + \frac{1}{-j 4\pi(k+f_1 T_0)} \left(e^{-j 2\pi(k+f_1 T_0)} - 1 \right) \end{aligned}$$

Cosine example when $f_1 T_0$ is an integer

$$\begin{aligned} X_k &= \frac{1}{2T_0} \left(\int_0^{T_0} e^{-j\frac{2\pi(k-f_1 T_0)t}{T_0}} dt + \int_0^{T_0} e^{-j\frac{2\pi(k+f_1 T_0)t}{T_0}} dt \right) \\ &= \begin{cases} \frac{1}{2} & k \pm f_1 T_0 = 0 \\ 0 & k \pm f_1 T_0 = \text{any other integer} \end{cases} \end{aligned}$$


Outline

- 1 Review: Fourier Series
- 2 Computing the Fourier Series Coefficients
- 3 Calculation Examples
- 4 Visualization Examples**
- 5 Summary

Another Square Wave

Let's try this square wave:

$$x(t) = \begin{cases} 1 & -\frac{T_0}{4} \leq t \leq \frac{T_0}{4} \\ 0 & \text{otherwise} \end{cases}$$



Square wave: the X_0 term

$$X_0 = \frac{1}{T_0} \int_{-T_0/4}^{T_0/4} e^{-j2\pi kt/T_0} dt$$

... but if $k = 0$, then $e^{-j2\pi kt/T_0} = 1!!!$


$$X_0 = \frac{1}{T_0} \int_{-T_0/4}^{T_0/4} 1 dt = \frac{1}{2}$$

Square wave: the X_k terms, $k \neq 0$

$$\begin{aligned} X_k &= \frac{1}{T_0} \int_{-T_0/4}^{T_0/4} e^{-j2\pi kt/T_0} dt \\ &= \frac{1}{T_0} \left(\frac{1}{-j2\pi k/T_0} \right) \left[e^{-j2\pi kt/T_0} \right]_{-T_0/4}^{T_0/4} \\ &= \left(\frac{j}{2\pi k} \right) \left(e^{-j\pi k/2} - e^{j\pi k/2} \right) \\ &= \frac{1}{\pi k} \sin \left(\frac{\pi k}{2} \right) \\ &= \begin{cases} 0 & k \text{ even} \\ \pm \frac{1}{\pi k} & k \text{ odd} \end{cases} \end{aligned}$$


Square wave: the X_1 terms

$$X_1 = \frac{1}{\pi}$$

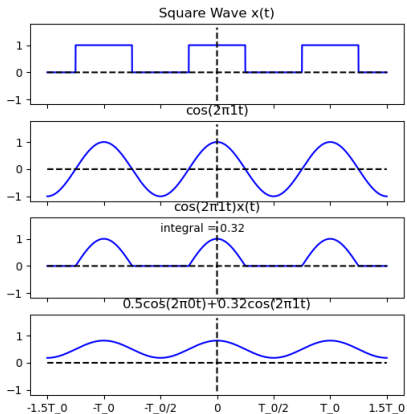


Square wave: the X_2 term

$$X_2 = 0$$

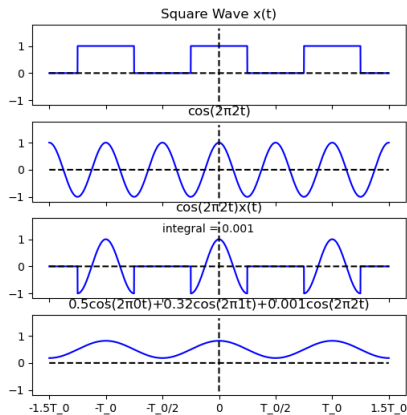


Square wave: the X_3 term

$$X_3 = -\frac{1}{3\pi}$$

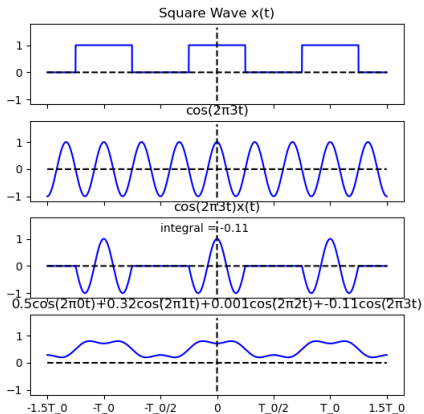


Square wave: the X_5 term

$$X_5 = \frac{1}{5\pi}$$

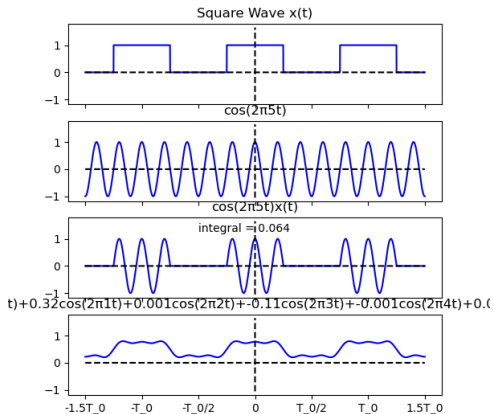

Square wave: the whole Fourier series

$$x(t) = \frac{1}{2} + \frac{1}{\pi} \left(\cos\left(\frac{2\pi t}{T_0}\right) - \frac{1}{3} \cos\left(\frac{6\pi t}{T_0}\right) + \frac{1}{5} \cos\left(\frac{10\pi t}{T_0}\right) - \frac{1}{7} \dots \right)$$

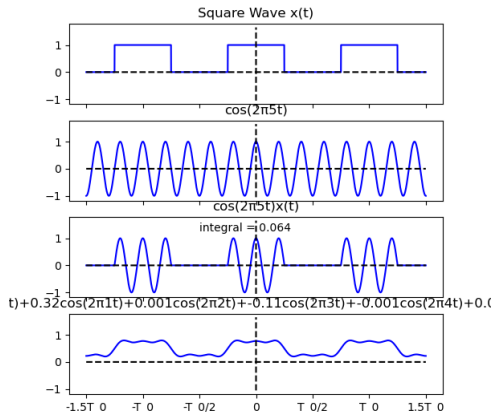

Quiz

Try the quiz! Go to the course webpage, and click on today's date.

Outline

- 1 Review: Fourier Series
- 2 Computing the Fourier Series Coefficients
- 3 Calculation Examples
- 4 Visualization Examples
- 5 Summary

Summary

- **Analysis** (finding the spectrum, given the waveform):

$$X_k = \frac{1}{T_0} \int_0^{T_0} x(t) e^{-j2\pi kt/T_0} dt$$

- **Synthesis** (finding the waveform, given the spectrum):

$$x(t) = \sum_{k=-\infty}^{\infty} X_k e^{j2\pi kt/T_0}$$