

# CS/ECE 439: Wireless Networking

MAC Layer – Power!

# Energy Conservation Techniques

---

- ▶ Wi-Fi devices consume significant amounts of energy when idle
  - ▶ Idle > 1W
- ▶ Conservation Approach: Device suspension (sleep)
  - ▶ Reduced energy consumption
    - ▶ Sleep ~ 0.05W
  - ▶ Suspended communication capabilities
    - ▶ Buffer overflow
    - ▶ Wasted bandwidth
    - ▶ Lost messages
    - ▶ If all nodes are asleep, no one can communicate!



# Communication Device Suspension

---

## ▶ Goal

- ▶ Remain awake when there is active communication
- ▶ Otherwise, suspend
- ▶ Adapt the sleep duration to reflect the communication patterns of the application

## ▶ Ideal

- ▶ Sleep whenever there is no data to receive from the base station
- ▶ Wake up for any incoming receptions

# Communication Device Suspension

---

## ► Problems

- How can a sender differentiate between a suspended node and a node that has gone away?
  - Suspended receiver  $\Rightarrow$  buffer packet
  - Confused sender  $\Rightarrow$  dropped packet, extra energy consumption
- How can a suspended node know there is communication for it?
  - Wake up too soon  $\Rightarrow$  waste energy
  - Wake up too late  $\Rightarrow$  delay/miss packets

# Communication Device Suspension

---

- ▶ **Approach**

- ▶ Ensure overlap between sender's and receiver's awake times

- ▶ **Protocols**

- ▶ Triggered Resume
  - ▶ Periodic Resume
    - ▶ Synchronous
    - ▶ Asynchronous

# Triggered Resume

---

## ▶ Approach

- ▶ Use a second control channel (second radio)
  - ▶ Sender transmits RTS or beacon messages in control channel
  - ▶ Receiver replies in control channel and turns on main channel
- ▶ Main channel is only used for data
- ▶ Second channel
  - ▶ Must consume less energy than the main channel
  - ▶ Must not interfere with the main channel
  - ▶ Ex: BLE, ZigBee, RFID, 915Mhz



# Triggered Resume


## ► Approach – Data only – PAMAS

### ► Data channel

- Power off radio when data is destined to a different node

### ► Control channel

- Probe neighbors to find longest remaining transfer

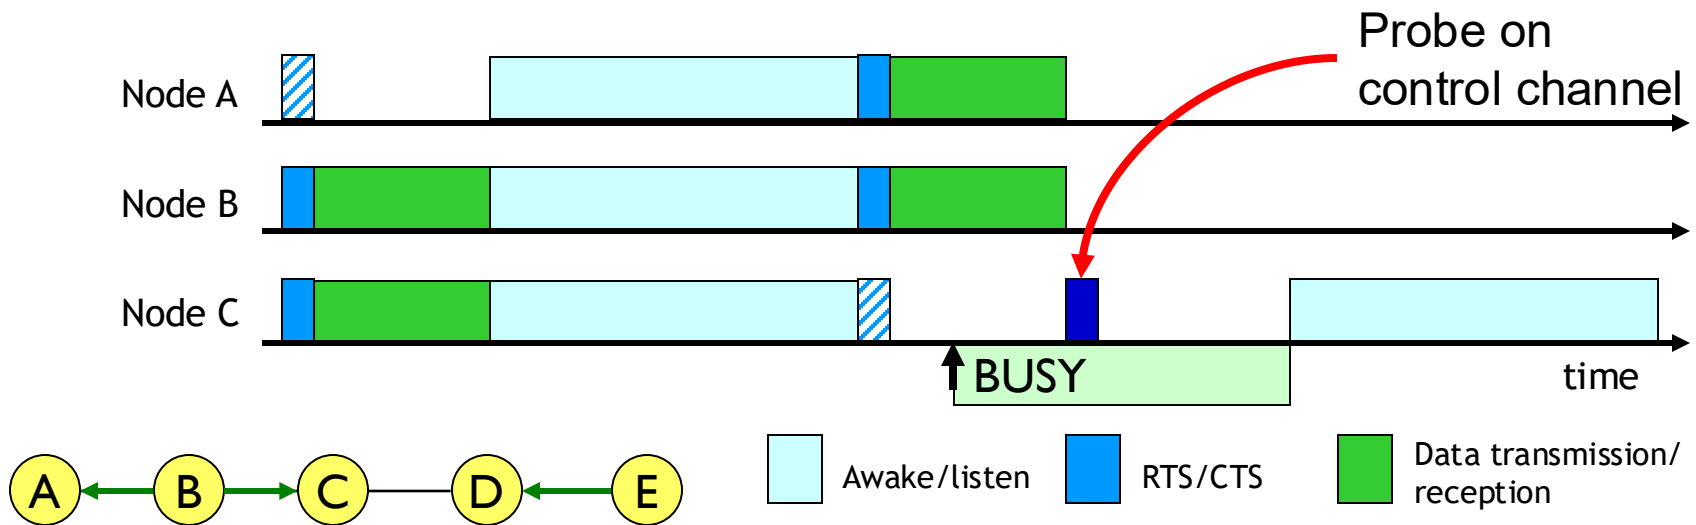


# Triggered Resume

---

## ► Dual radio


- Low duty cycle paging channel to wake up a neighboring node
- Use separate radio for the paging channel to avoid interference with regular data forwarding
- Trades off energy savings for setup latency

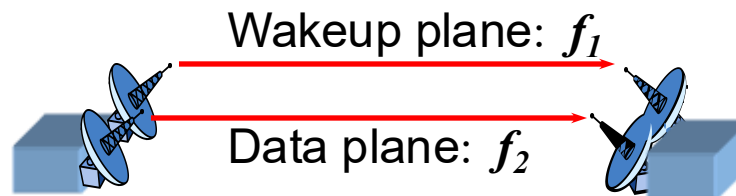




# Triggered Resume

## ► Dual radio

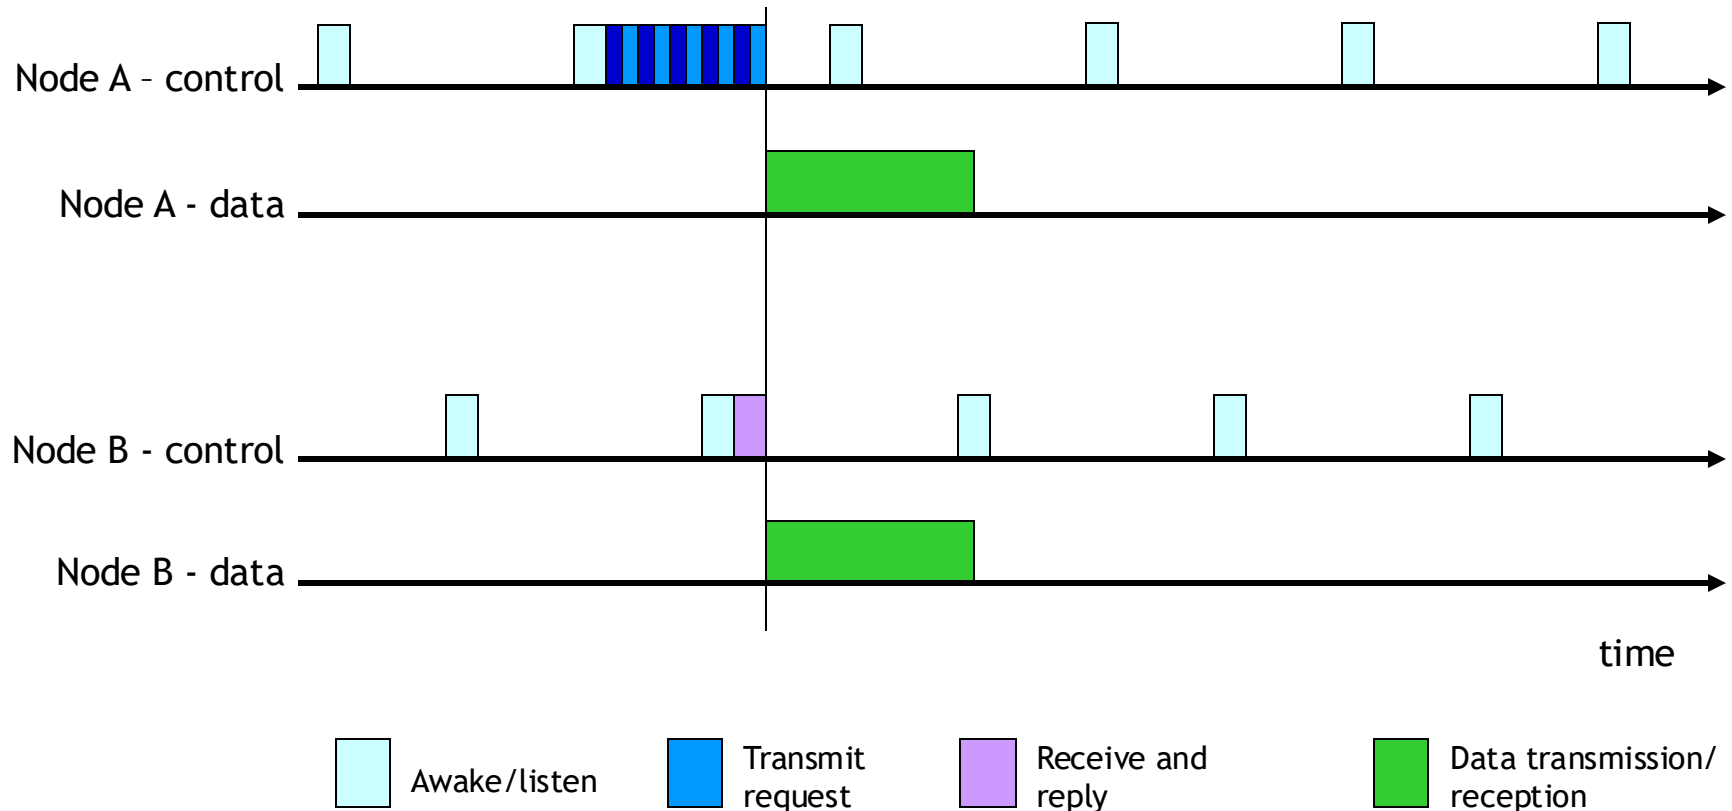

# Triggered Resume – 802.11ba

---

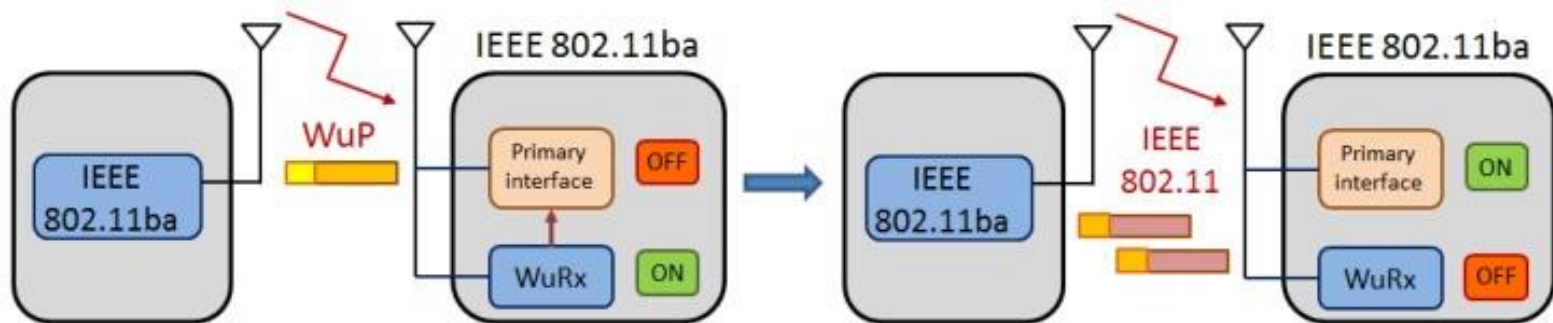

# Triggered Resume

---

## ▶ Challenges

- ▶ Two radios are more complex than one
- ▶ Channel characteristics may not be the same for both radios
  - ▶ A successful RTS on the control channel does not guarantee a the reverse channel works
  - ▶ A failed RTS on the control channel does not indicate that the reverse channel does not work



# Periodic Resume

---

## ▶ Approach

- ▶ Suspend most of the time
- ▶ Periodically resume to check for pending communication

## ▶ Communication indications

- ▶ Out-of-band channel
- ▶ In-band signaling

## ▶ Protocols

- ▶ Synchronous
- ▶ Asynchronous




# Synchronous Periodic Resume

---

## ► Basic Idea

- Time is slotted
- Nodes selectively remain awake for full slot duration
- Discovery occurs when two active slots overlap
- If all nodes are synchronized, all nodes are guaranteed to have overlapping awake periods

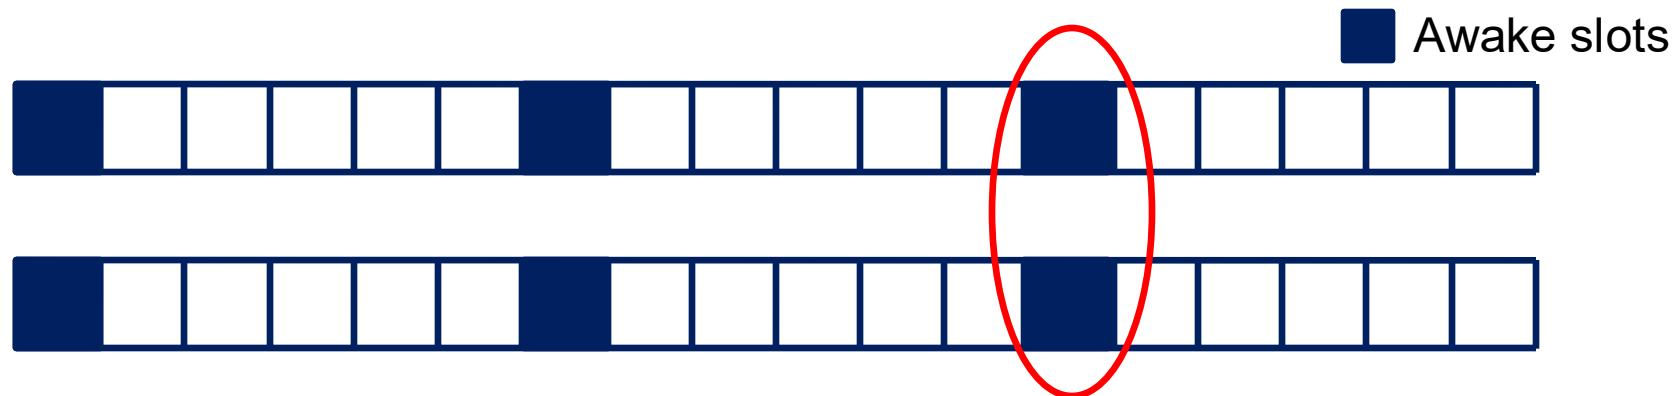


# Synchronous Periodic Resume

---

- ▶ **Protocol: IEEE 802.11 Power Save Mode (PSM)**
  - ▶ Nodes are synchronized and wakeup periodically (Beacon Period)
  - ▶ Each beacon period is broken up into two segments
    - ▶ Ad-hoc Traffic Indication Map (ATIM) Window
      - Announcement in the ATIM indicates data
      - Target node responds with an ATIM ACK
      - If a node receives no announcements, it goes back to sleep
    - ▶ Transmission period
      - Sender can transmit packet until the end of the beacon period

# Synchronous Periodic Resume

## ► IEEE 802.11 PSM

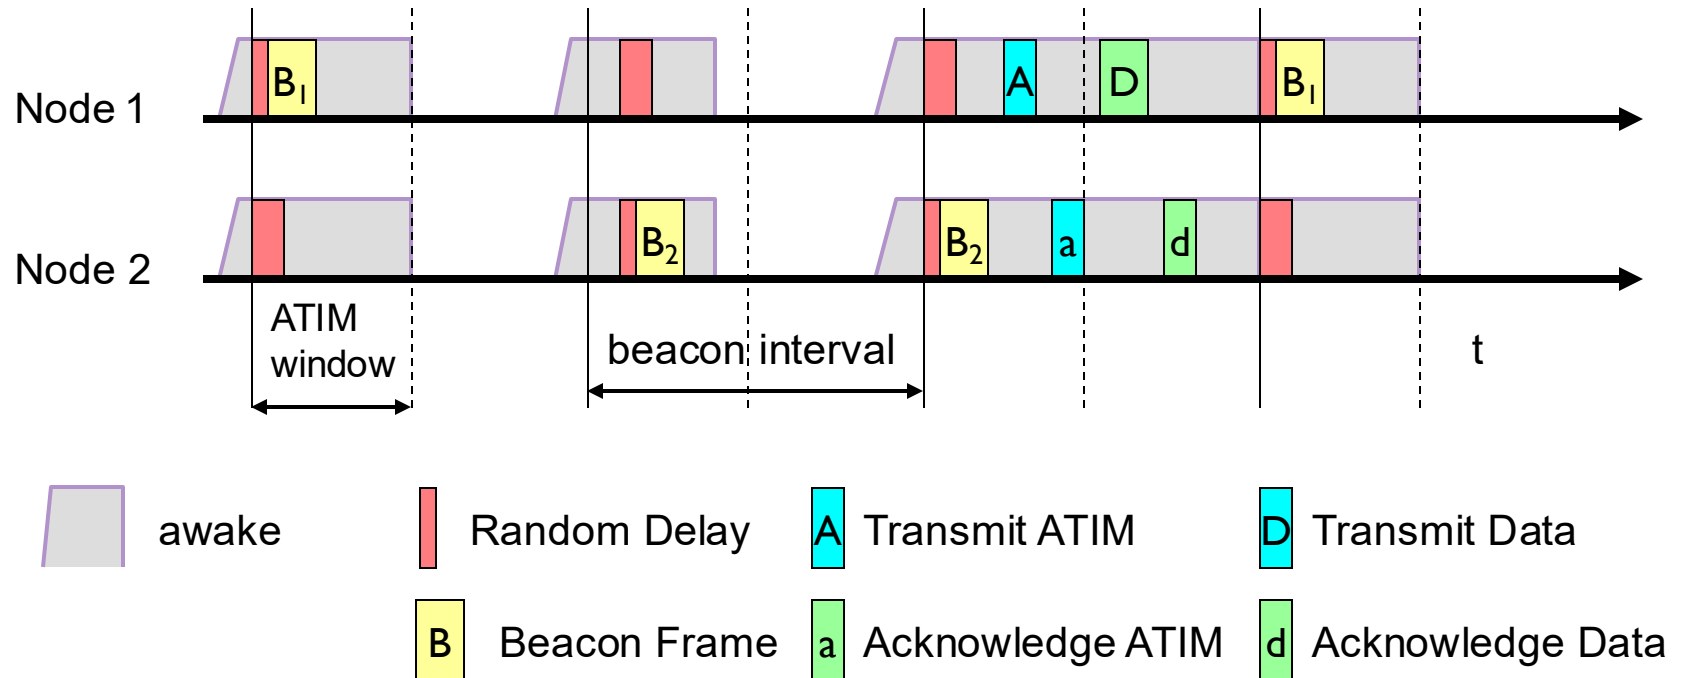

# Synchronous Periodic Resume

---

- ▶ **Centralized solution**

- ▶ Synchronization driven by base station
- ▶ In beacon message

- ▶ **Distributed solution**


- ▶ No base station
- ▶ Synchronization protocols can be used to loosely synchronize nodes
  - ▶ Nodes wake up for a short period and check for channel activity
  - ▶ Return to sleep if no activity detected



# Distributed Synchronous Periodic Resume

---


- ▶ Persistent loose synchronization
  - ▶ Constant, high synchronization overhead

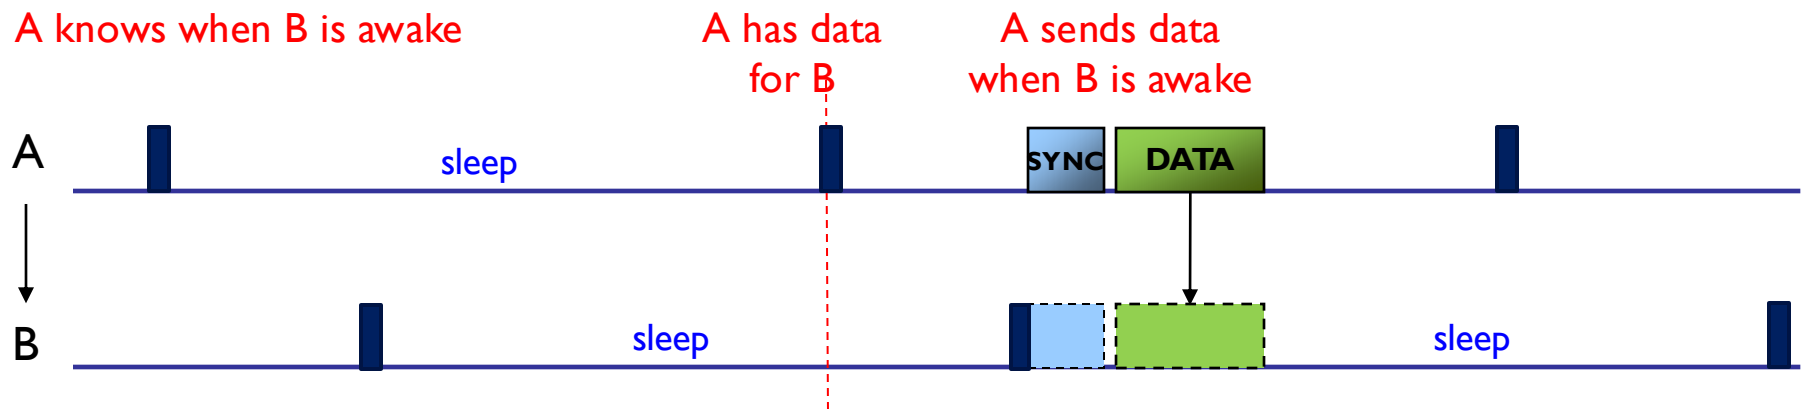

# Distributed Synchronous Periodic Resume

## ► Signaling

- No synchronization overhead
- High signaling overhead
  - Long preambles, all nodes wake up

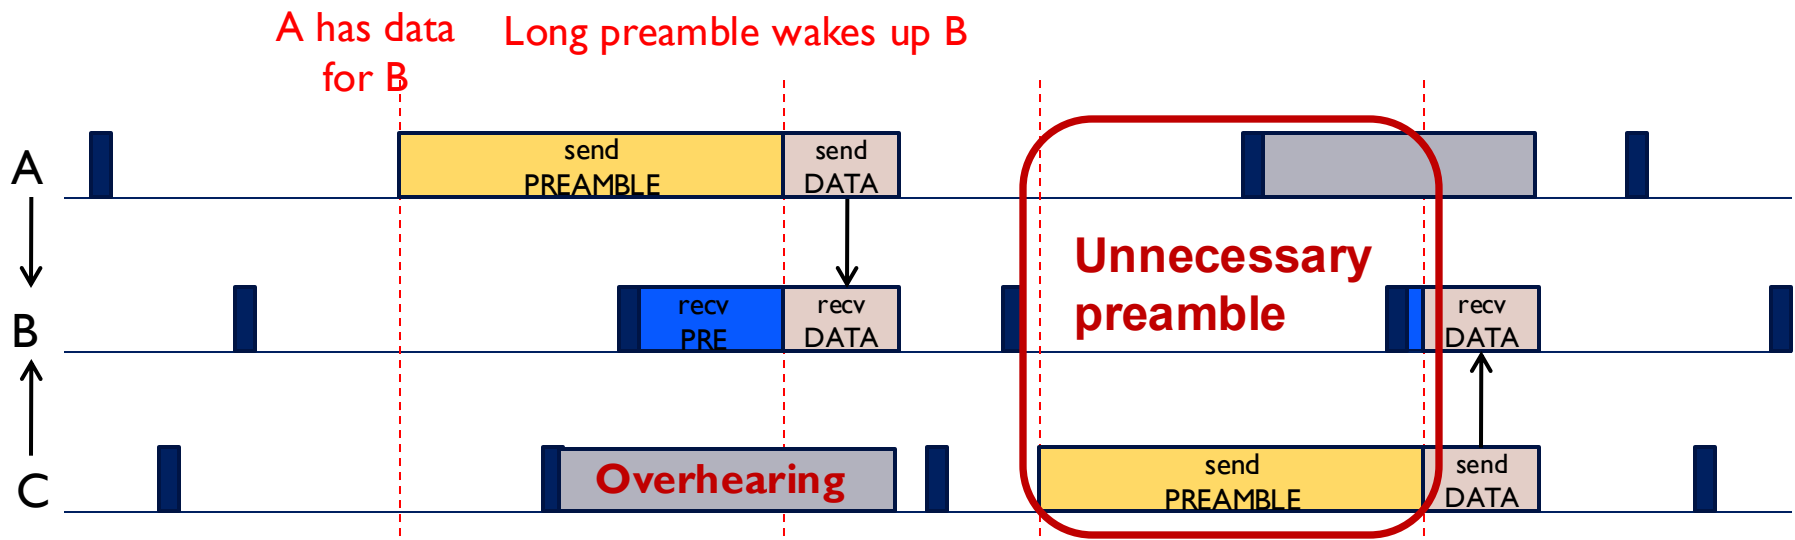

## ► Signaling: Wake-up packets

- A has data  
for B



# Distributed Synchronous Periodic Resume

---

- ▶ **Signaling: Multiple send**
  - ▶ Send data several times
  - ▶ Receiver can listen at any time and get all data
- ▶ **Problem with all approaches**
  - ▶ Communication costs are mostly paid by the sender
  - ▶ The amount of time the sender spends transmitting may be much longer than the actual data length



# Synchronous Periodic Resume

---

## ► Problems


- Maintaining synchronization may be difficult
- Throughput is limited by the size of the notification window
  - If the notification window is too small, packets get buffered
  - Buffers may eventually overflow



# Asynchronous Periodic Resume

## ► Approach


- Stay awake longer to guarantee overlap of awake periods
- Overlap is guaranteed if the awake periods are more than half the beacon period

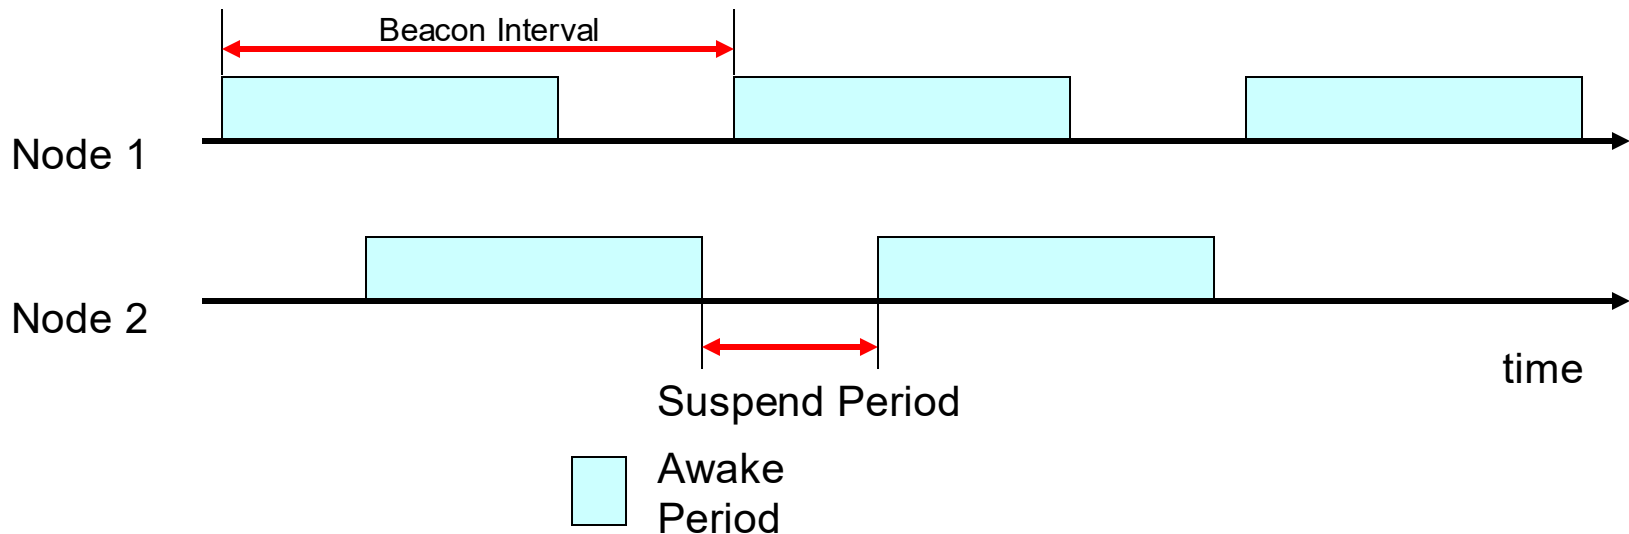

# Asynchronous Periodic Resume

## ► Basic protocol


- Use beacon messages at the start of awake periods
- Some protocols use notification messages (similar to ATIM)

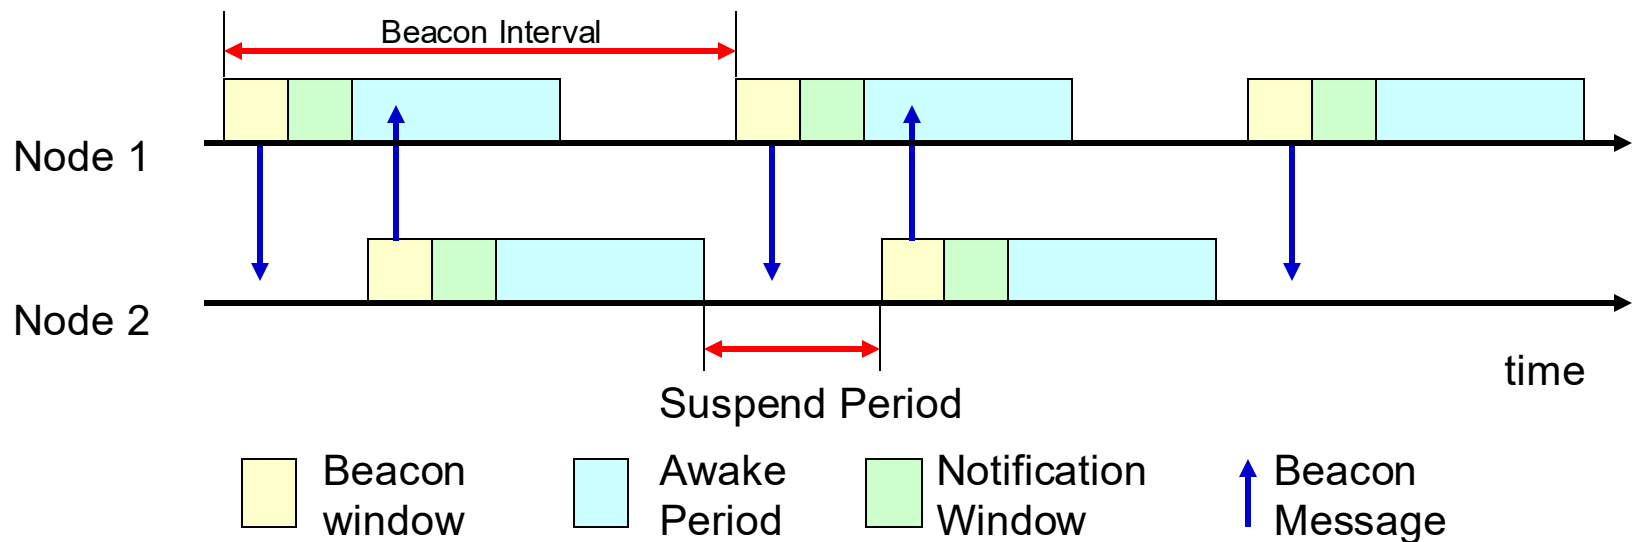

# Asynchronous Periodic Resume

## ► Problem

- No guarantee that all nodes will hear each other's beacon or notification messages

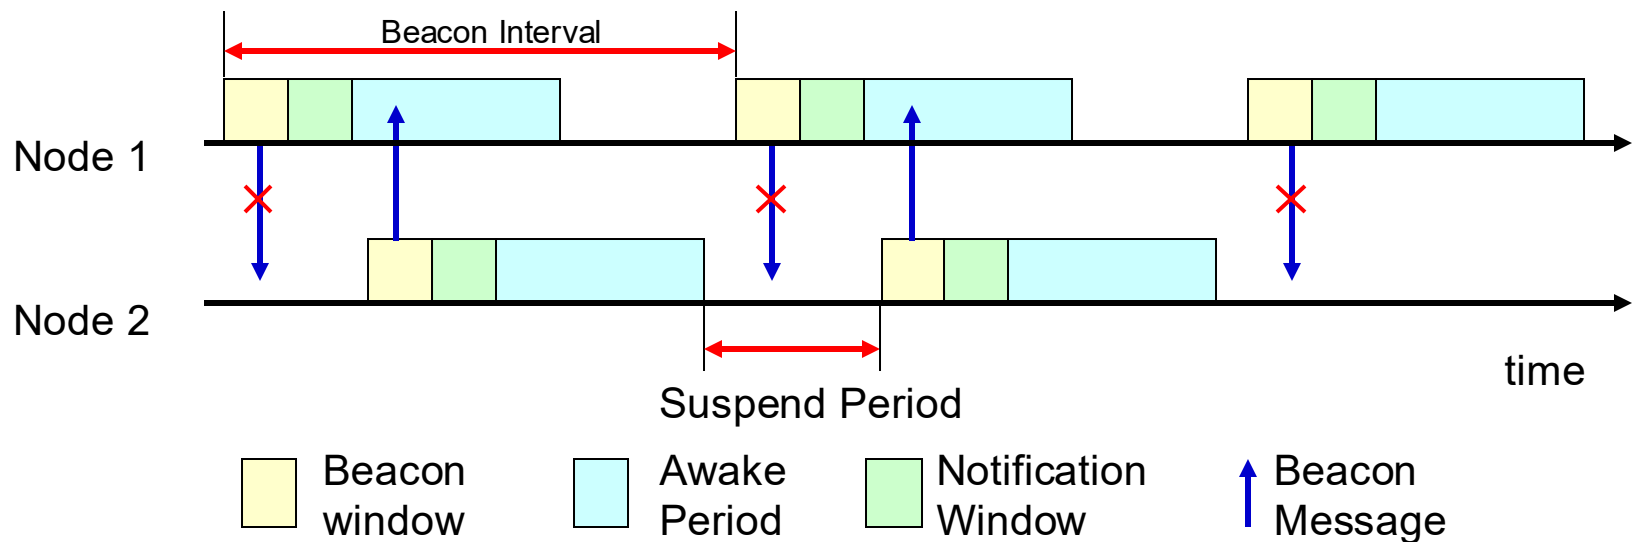




# Asynchronous Periodic Resume

## ► Solution


- Have a beacon at the beginning and end of the beacon interval

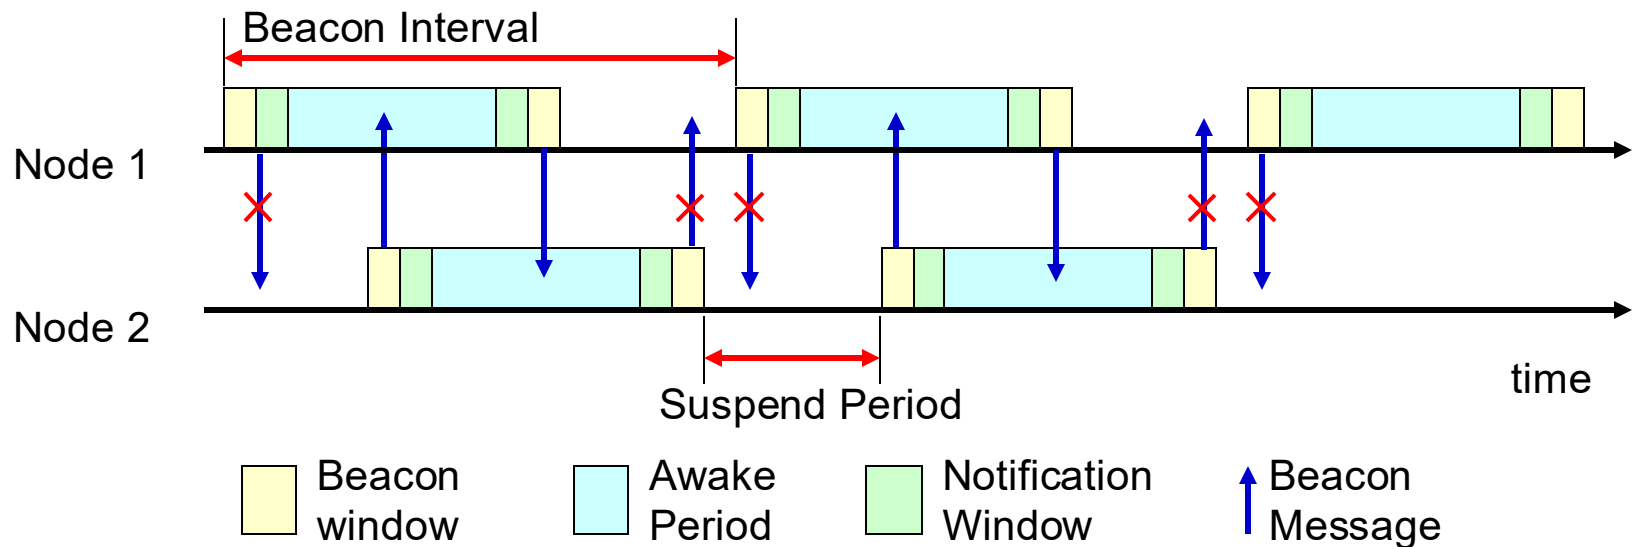

# Asynchronous Periodic Resume

## ▶ Alternate solution


- ▶ Beacon at the beginning of odd periods
- ▶ Beacon at the end of even periods

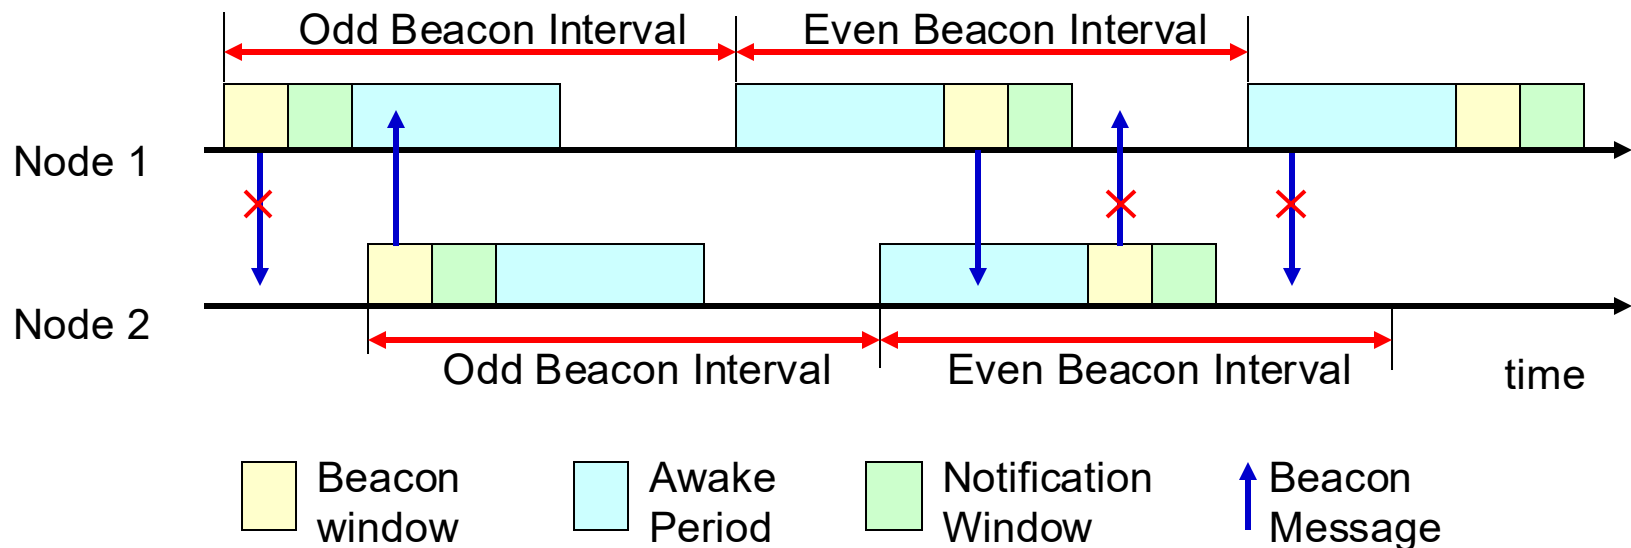

# Asynchronous Periodic Resume

## ► Problem


- Nodes stay awake more than half the time
- Wastes too much energy!

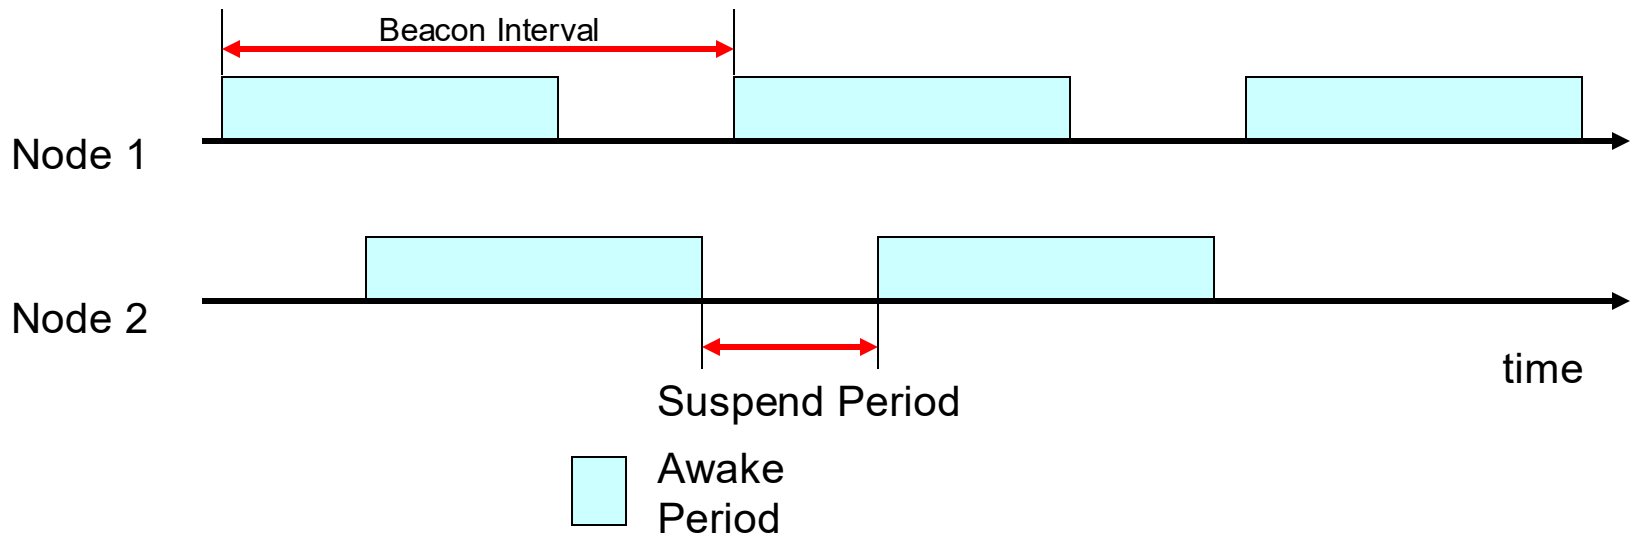

# Asynchronous Periodic Resume

- ▶ Reduce awake time

- ▶ Do not wake up every beacon interval
- ▶ Delay depends on number of overlapping intervals

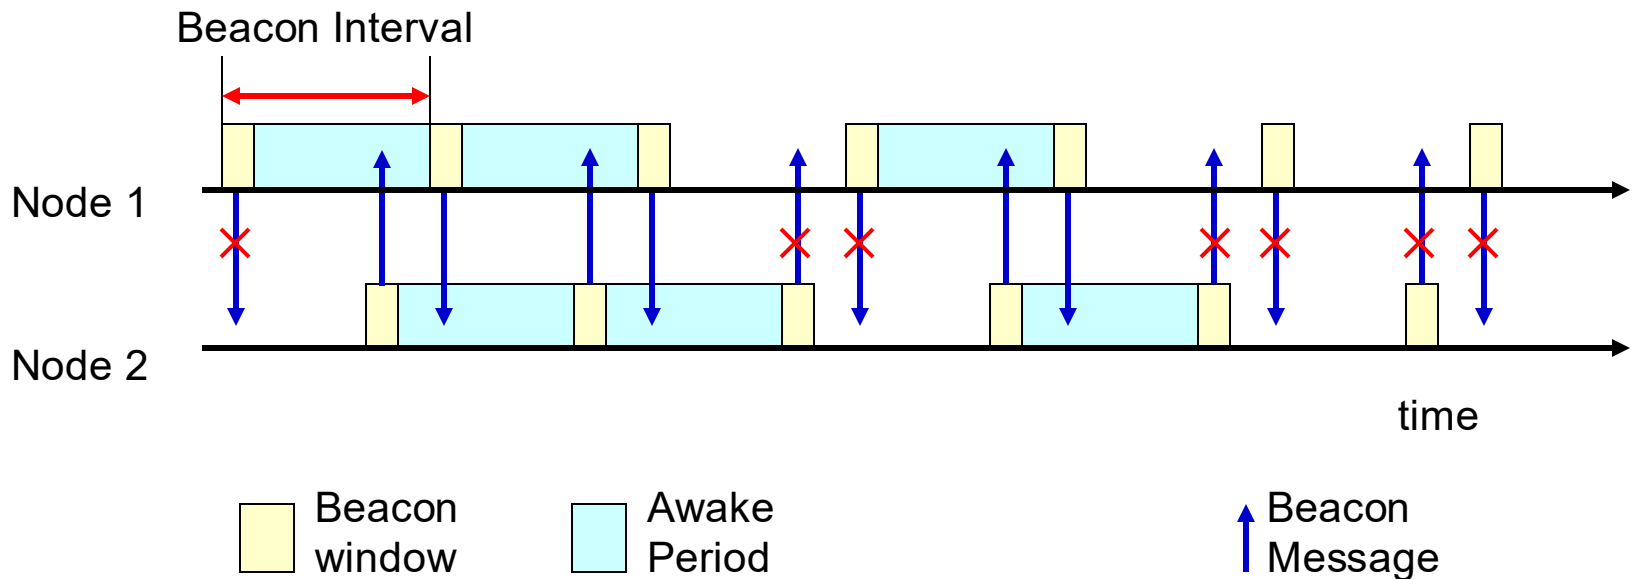


# Asynchronous Periodic Resume

## ► Randomized Approach

### ► Birthday protocol


- Randomly select a slot to wake up in with a given probability
- Advantage
  - Good average case performance
- Disadvantage
  - No bounds on worst-case discovery latency

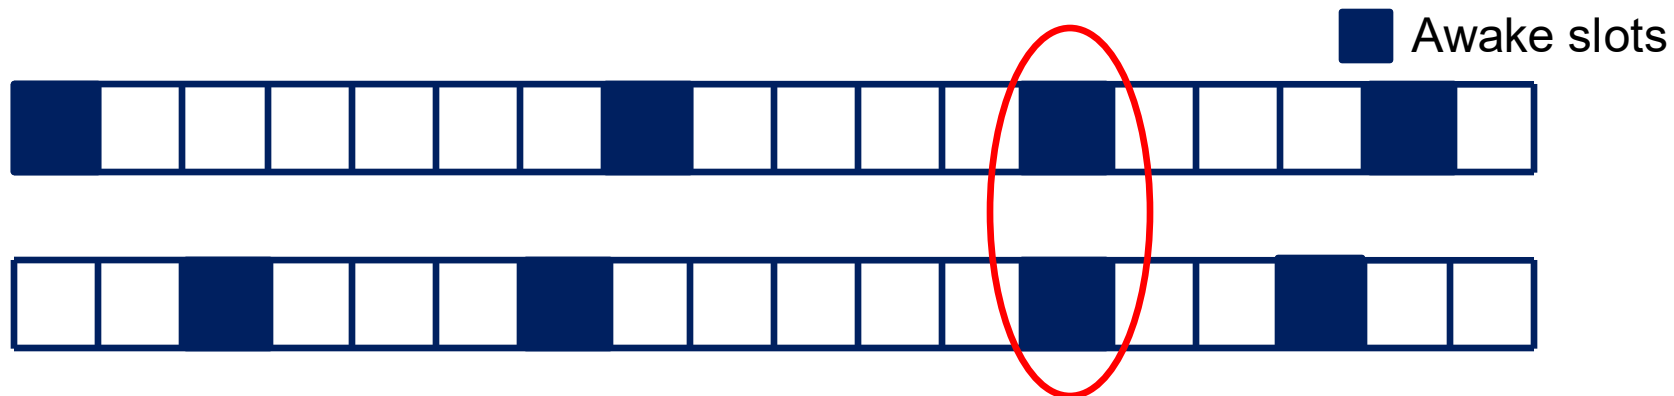

# Asynchronous Periodic Resume

## ► Extended sleep


- Wake up once every  $T$  intervals
- Adds delay up to  $T \times$  length of beacon interval

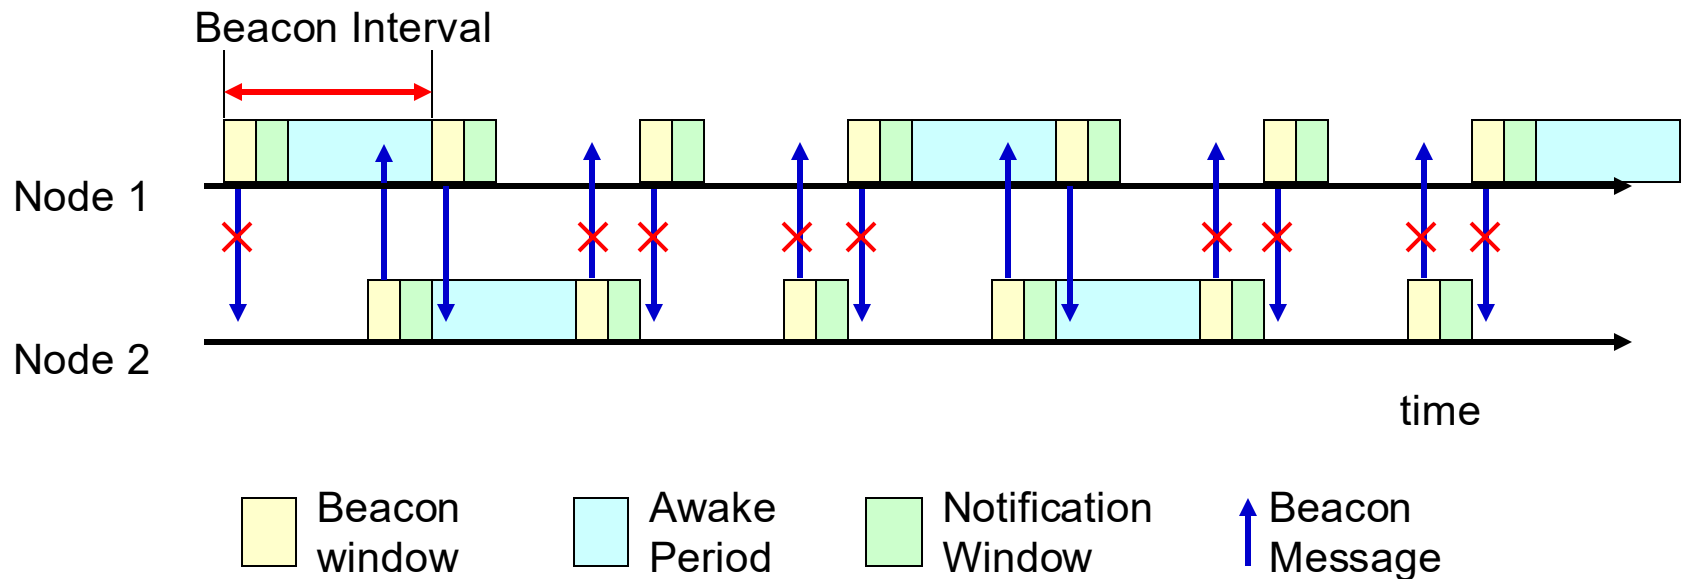

# Asynchronous Periodic Resume

## ► Quorum

- Increase number of beacon intervals in cycle ( $n$ )
- Increase number of awake periods ( $2n - 1$  of  $n^2$ )

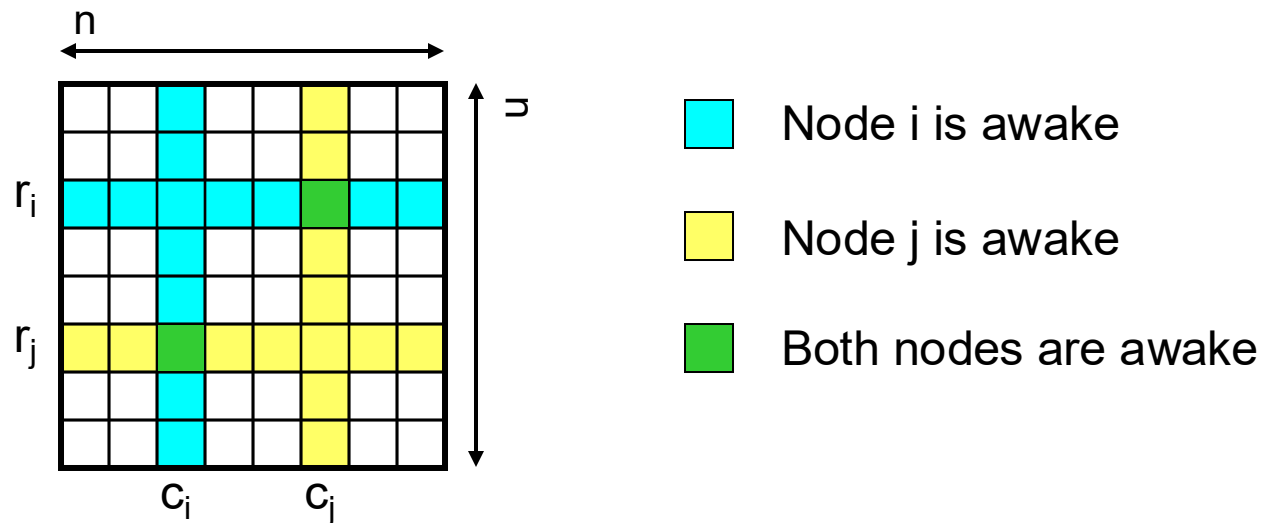


Delay is determined by where the overlap is (worst case  $n^2$ )

# Asynchronous Periodic Resume

## ► Quorum

► Example:  $n = 4$ ,  $n^2 = 16$ ,  $2n-1 = 7$

► Two overlapping intervals: delay =  $n^2 - 2$

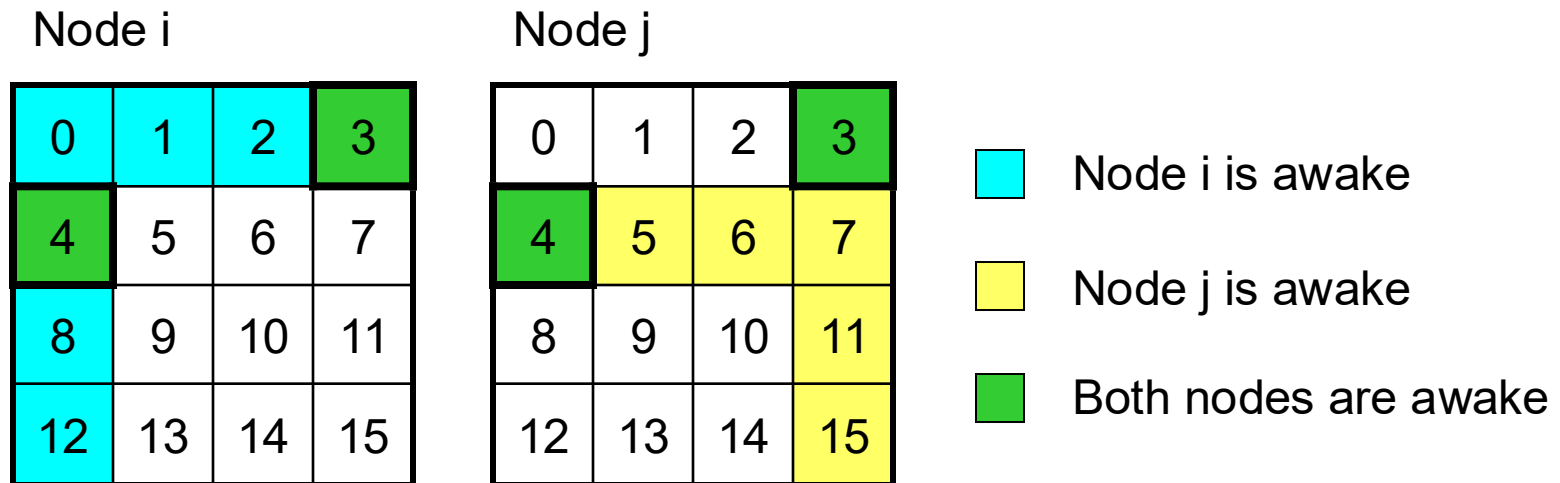




# Asynchronous Periodic Resume

## ► Deterministic

- Find a feasible overlapping pattern
  - Guarantee at least one overlapping interval
  - Requires knowledge of number of nodes

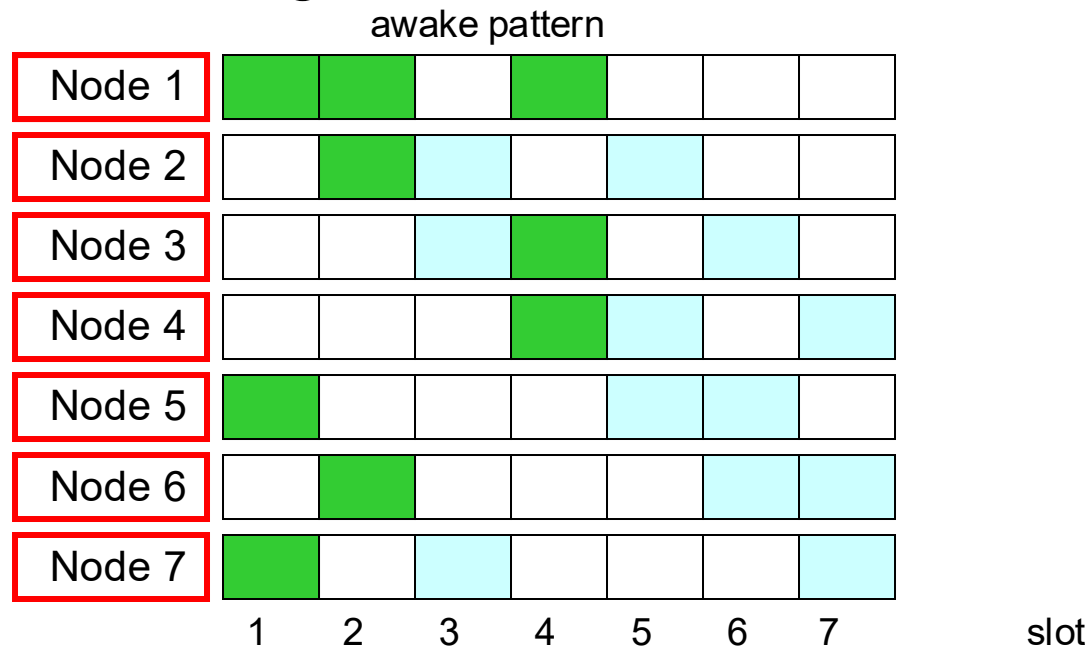


# Asynchronous Periodic Resume

---

## ► Deterministic: Prime-based

### ► Disco

- Pick two primes  $p_1$  and  $p_2$
- Wake up every  $p_1$  and  $p_2$  slot
- Guarantees discovery in  $p_1 \times p_2$  slots

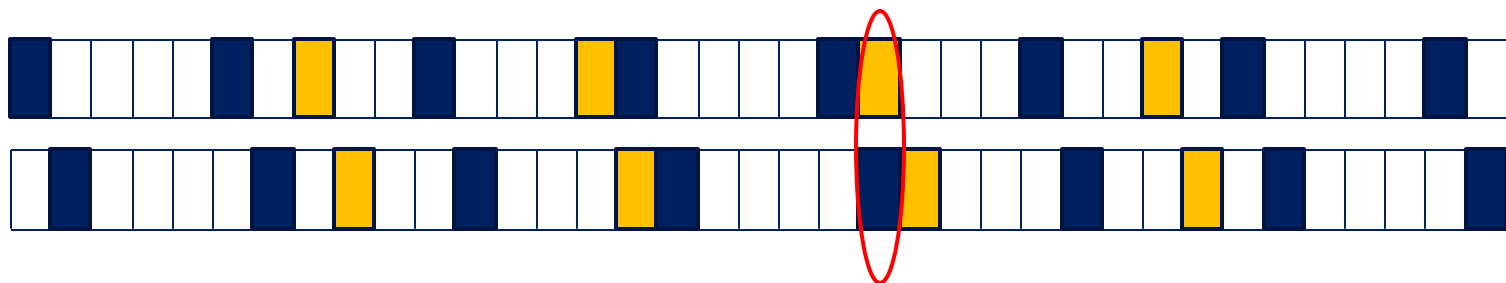


# Asynchronous Periodic Resume

## ► Deterministic: Prime-based

### ► U-Connect

- Select 1 prime  $p$
- Wake up every  $p$ th slot and  $(p-1)/2$  slots every  $p^2$  slots
- Overlap is guaranteed within  $p^2$  slots

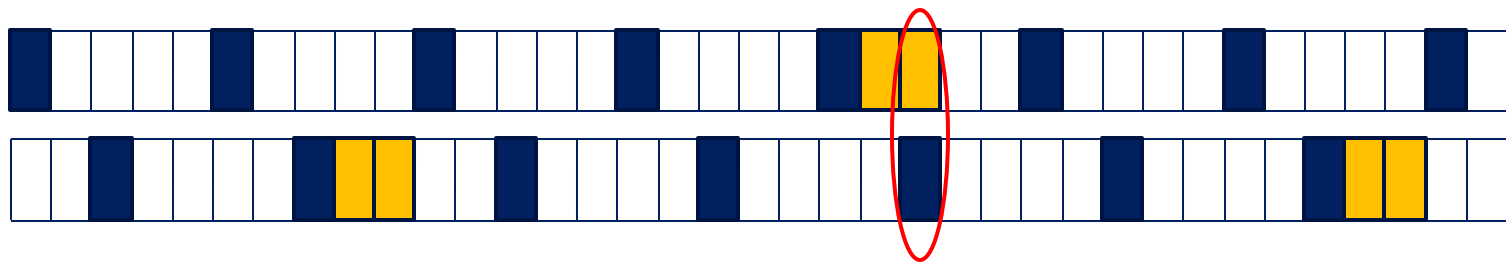


# Asynchronous Periodic Resume

---

## ► Searchlight


- Have a **deterministic** discovery schedule that has a **pseudo-random** component

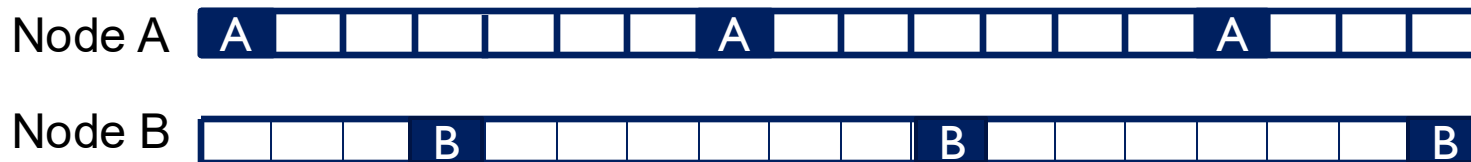

# Asynchronous Periodic Resume

## ► Searchlight

- Two slots per  $t$  slots (period)
  - Anchor slot: Keep one slot fixed at slot 0
  - Probe slot: Move around the other slot sequentially
- Guaranteed overlap in  $t^*t/2$  slots
  - Based on the time needed to ensure a probe-anchor overlap
- Probe-probe overlap can also lead to discovery
  - Sequential scanning means less chance of a probe-probe overlap

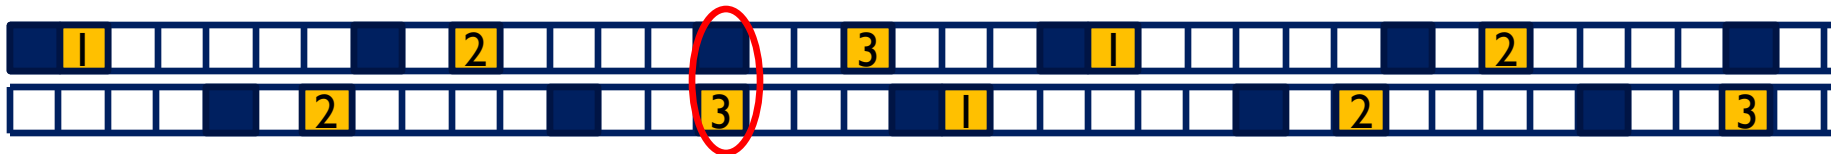


Discovery through anchor-probe overlap



# Asynchronous Periodic Resume

## ► Searchlight

- Extension: randomized probing
  - Move the probe slot randomly
- Each node randomly chooses a schedule for its probe slot that repeats every  $(t^*t/2)$  slots
  - Schedules of two nodes appear random to each other
- Advantage
  - Retains the same worst-case bound
  - Improves average case performance

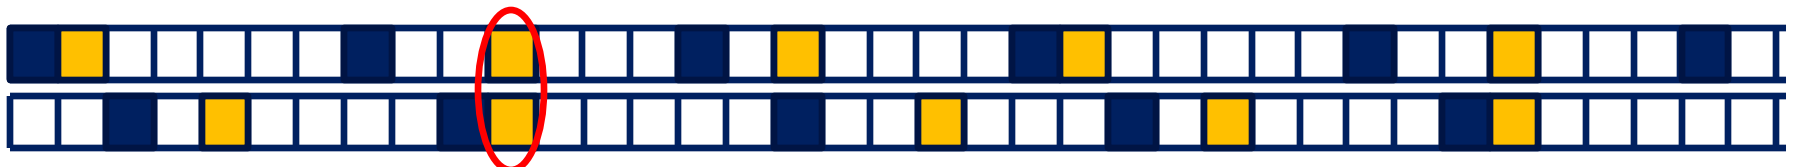

Discovery through probe-probe overlap



# Asynchronous Periodic Resume

---

## ▶ Challenges

- ▶ Reducing time spent awake
- ▶ Reducing delay
- ▶ No support for broadcast
  - ▶ None of the current approaches provide an interval where all nodes are awake



# Wi-Fi 6 and beyond: Target Wake Time (TWT)

---

- ▶ Goal: reduce power consumption and contention
- ▶ Operating Modes
  - ▶ Individual TWT
  - ▶ Broadcast TWT
  - ▶ Opportunistic PS






# Target Wait Time (TWT)

---

- ▶ **TWT Service Period (TWT SP)**
  - ▶ Awake period to receive or send data
- ▶ **TWT Wake Interval**
  - ▶ Average time between successive TWT SP start times
- ▶ **TWT Channel**
  - ▶ Temporarily primary channel
- ▶ **TWT Agreement**
  - ▶ Final agreement between AP and client




# Individual Target Wait Time (TWT)

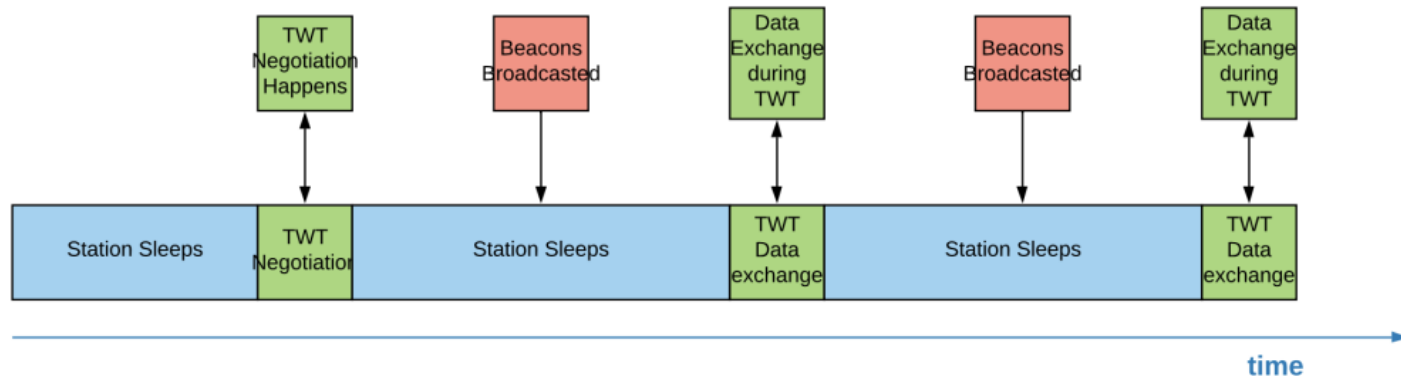

- ▶ Client sends waking schedule information to AP
- ▶ AP devises a schedule and sends TWT values to client
- ▶ The client wakes up and transmits according to the schedule
- ▶ Explicit Mode
  - ▶ AP sends client the next TWT information on when to wake up again
  - ▶ Client wakes up at the next scheduled time to send a frame and receive a new TWT information
- ▶ Implicit Mode
  - ▶ Client calculates next TWT by adding a fixed value to the current TWT


# Broadcast Target Wait Time (TWT)

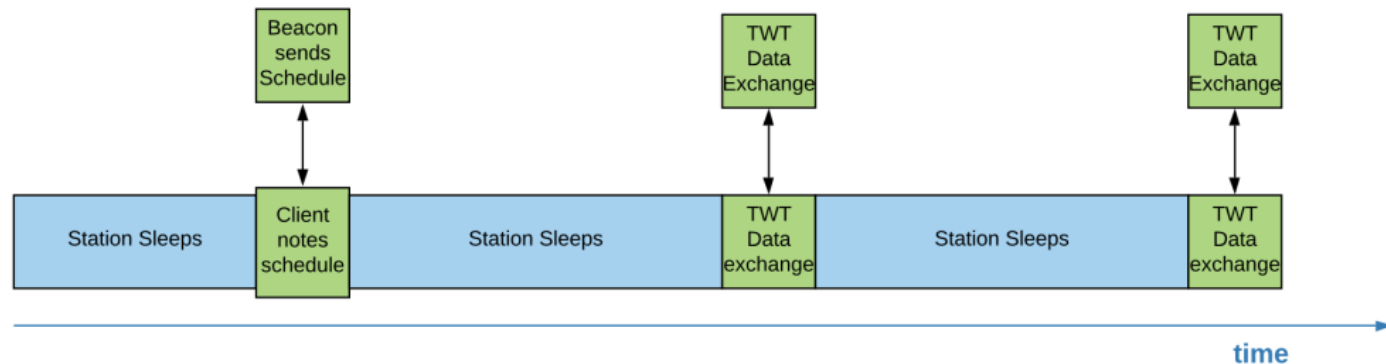

## ► Hybrid PSM and TWT

- Beacon sub-intervals:
- Traffic Indication Map (TIM):
- Opportunistic sleep
  - Stay awake if Association Identifier (AID) is in TIM
  - No AID, client returns to a doze (sleep) state for the remainder of that service period
  - If AID is listed, client stays awake for that service period to receive data
- No negotiation required

# Opportunistic Power Save Mode

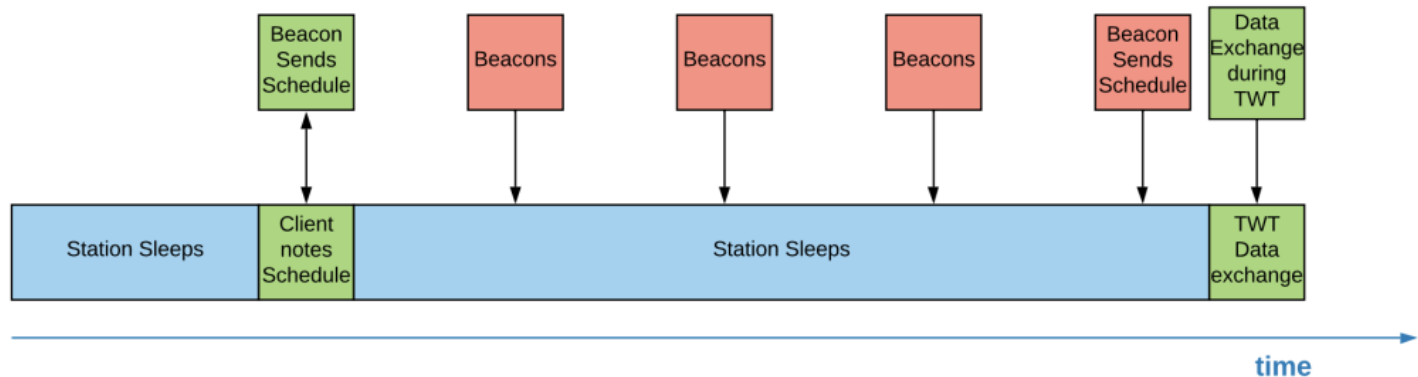

## ► Scheduling

- AP sends TWT parameters in the Beacon frame using the TWT Element
- Clients use the TWT parameters from the most recently received TWT element

## ► Trigger-based TWT

- AP sends a trigger frame to discover which clients are awake
- AP sends frames to awake clients
- Clients can doze after transmission

# Target Wait Time (TWT)

---

- ▶ TWT reduces congestion
  - ▶ Packet collisions cause retransmissions
  - ▶ Retransmission increase client energy consumption
- ▶ Legacy Wi-Fi networks
  - ▶ Clients wake up at random times to transmit
  - ▶ Clients have no knowledge of the wake-up times of other clients
  - ▶ No collision avoidance mechanisms
- ▶ TWT
  - ▶ APs negotiate wake up times for clients
  - ▶ APs can avoid having all clients wake up at the same time



# TWT vs PSM

---

## ▶ PSM

- ▶ Clients must wake up during each beacon interval to check for buffered traffic
- ▶ Amount of traffic is limited by the TIM

## ▶ TWT

- ▶ Diverse sleep cycles
- ▶ Longer, negotiated sleep cycles
- ▶ Sleep cycle length independent of the standard beacon interval