

# ECE 445

## Project Proposal

09/14/2023

TA: Jason Zhang

Yogavarshini Velavan  
Manogna Rajanala  
Jeremy Wu

# Introduction

## 1. Problem:

Surgeons and medical professionals employ various methods to detect cancerous cells, mostly using their sense of vision and analysis of tissues to determine which cells are malignant and work towards appropriately removing those. However, there is a limit to the human vision especially when dealing with an entity like the human body which is so complex; it is very difficult to detect cancer cells in areas where there is not as much growth and visibility.

While biopsies and surgeries allow medical professionals to detect cancerous cells, it would be far more beneficial if surgeons were able to use a surgical camera and light to detect cancer in undetected areas. Considering how life threatening cancerous growths are and the fact that cancer is the second most leading cause of death in humans, detection and removal of cancerous cells is of utmost importance. Therefore, there is a critical and growing need to develop tools and methods to aid surgeons in their job of identifying and eliminating cancer cells.

## 2. Solution/Visual Aid:

Our solution to this is two-pronged: a microscopic camera and a surgical light. Our team will be working on the surgical light. This lamp will work in tandem with the microscopic camera to better aid cancer specialists to identify cancerous growths during both surgery and early examination. The surgical light solution is a programmable light source that will mainly be used in surgical settings. The light will allow medical professionals to use the infrared light to conduct a thorough examination of different areas that could be affected by cancerous cells. Using different LEDs, such as infrared and visible LEDs, the user can modify the brightness of the light as they deem appropriate and effectively be able to identify cancerous cells that may be harder to see otherwise. Not only will it aid in identifying the location, but it will allow for a more precise identification of where the cancerous cells might be growing. The microcontroller will allow for the adjusting of the brightness and this will be through a connection with a wire. Additionally, an additional LED PCB will be used in order to allow for heat dissipation and terminal release.


The light sources will contain different sets of LEDs. The first set of LEDs would be visible spectrum white LEDs (~400-700 nm) which will be a minimum of 5 kilolux. The second set of LEDs would emit around 700-800 nm infrared light which will be a minimum of 1 milliwatt per cm squared. As a part of the solution, there will be a two layer heat dissipating PCB for LEDs that will differ from a regular PCB that will be designed as the PCB specifically for LEDs will allow the PCB to not melt.

### 3. High-Level Requirements:

One of the goals of this project includes employing different types of LEDs, such as the infrared light as well as the visible light to allow the user or the surgeon to identify cancerous cells. Another requirement for this project is to develop a way for the user to increase or decrease the brightness of the LED as well as the color temperature, so that the surgeon is able to adjust as they see fit. Lastly, this project would entail a graphical interface for the user to control the brightness and LEDs in an easier manner, for example, using a PC.

## Design

### 1. Block Diagram

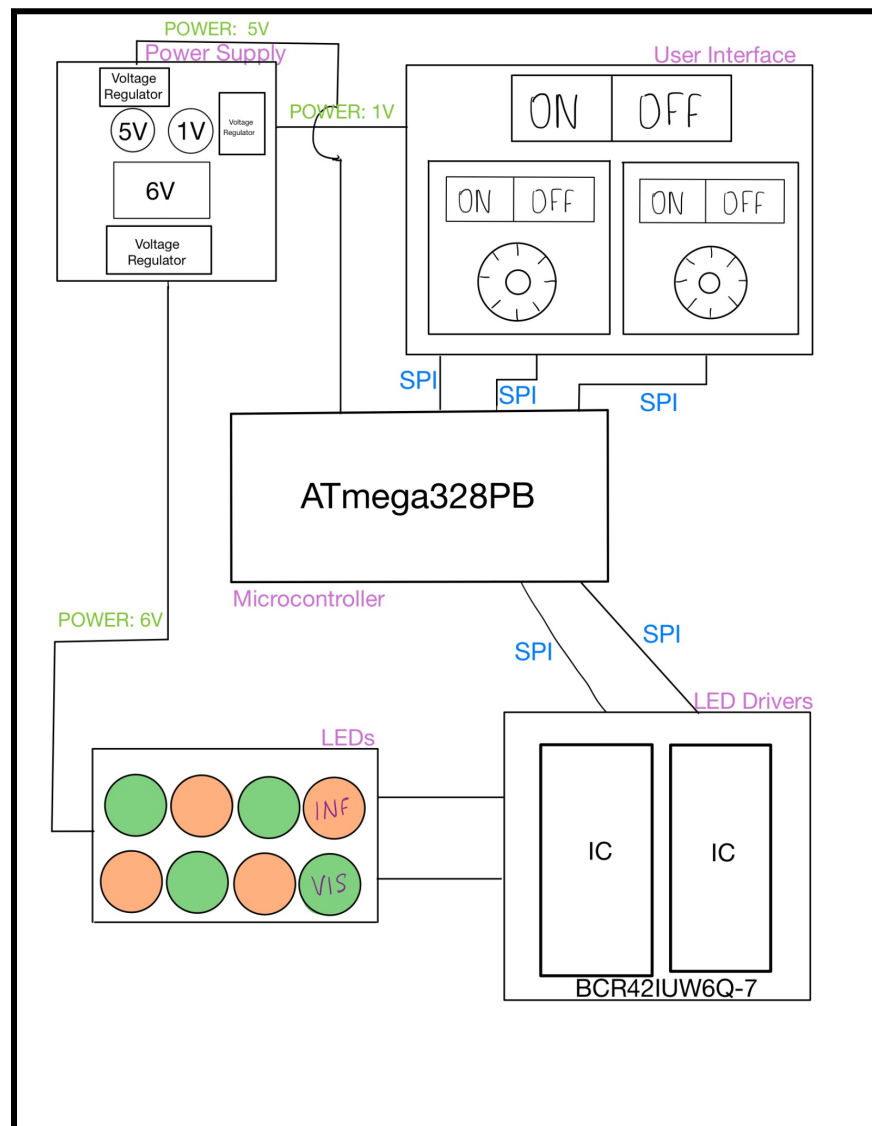

## **2. Subsystem Overview**

### **Power Supply**

This is the subsystem that supplies power to other subsystems in the project. contains three main power sources. We are planning on having batteries to provide relatively lower power to the user interface board and the microcontroller. A potential battery that will supply around 1.5V to the user interface is Alkaline battery. We could use a Lithium-Ion button cell to power the microcontroller which can tolerate up to 5V of voltage. Lastly, the biggest power supply would be for the LEDs which usually have an average voltage of 2.2 V. It will also contain voltage regulators to ensure that the voltage supply is consistent and within the limits.

### **User Interface**

The user interface board would be the main control panel from which the user will adjust the LEDs and their brightness. It will contain a master switch which can turn all the LEDs on or off. It will also contain two separate control panels for the visible light LEDs and the infrared LEDs. Each type of LEDs would have a secondary switch to completely turn that LED on or OFF. Each type of LED will also have a knob associated with it which can control the brightness of the LEDs.

### **Microcontroller**

We decided to use the ATmega328PB microcontroller to control the brightness of our LEDs using PWM waves that are generated by the microcontroller. We chose this specific microcontroller for several reasons. It has high performance capabilities but also works low-power (around 5V) which is better for our design as we want to keep the design as small as possible. It has several I/O pins which is essential since we will be connecting these to the LED drivers to power the LED appropriately based on the settings on the user interface board. It also contains 32 kilobytes of flash drive to hold our program.

### **LED Drivers**

LED Drivers are an essential part of our design. Since it is critical to the functioning of the light that we can control the brightness, we require LED drivers to regulate the voltage and current to the LEDs. We would need different drivers for the two kinds of LEDs. We are planning on utilizing an appropriate PWM signal from the microcontroller to drive the LEDs. The PWM duty cycle will depend on the brightness of the LEDs required.

### **LEDs**

Our design contains two types of LEDs, near-infrared LEDs and visible or white light LEDs. Since they emit different wavelengths, they also have different voltage and current

requirements. Therefore we will use separate LED drivers to power the LEDs. It will also be connected to the power supply of 5V on the other side to power the LEDs.

### **3. Subsystem Requirements**

#### **Power Supply**

1. The power supply for the microcontroller should be able to continuously supply 5V  $\pm 0.3$  V. This is to ensure that the PWM has enough voltage to drive the LEDs. A potential supply for this can be a 5V Li-Ion battery which is rated for 2200mAh.
2. The power supply for the user interface is an alkaline battery for 1.5V rating. This voltage has to be very low since it is only for signals from buttons and knobs similar to potentiometer.
3. The power supply for the LEDs should be around 6V since typically LEDs have a voltage drop of 1.2V for infrared LEDs and around 3.4V for white light so we can place the LEDs in series and then have multiple rows parallel. The alkaline battery used for this should have a current rating of at least 500mA. This can be achieved by using two button cells.
4. All the voltage regulators should be able to hold the voltage required for the system i.e. 6V, 5V and 1V.

#### **User Interface**

1. We need a master switch that would turn off the entire LED system. This is especially important in a field so critical like surgery.
2. We need secondary switches to turn on and off the individual types of LEDs depending on the user's needs.
3. Most importantly, knobs are needed to adjust the brightness of the LEDs. The setting of the knob must be proportional to the brightness of the LEDs.

#### **Microcontroller**

1. The microcontroller cannot handle more than 5.5 V so care must be taken to ensure that this value is not exceeded.
2. The microcontroller must be able to deliver PWM signals to the firing of the LED driver with the appropriate modulation. The brightness setting should be reflected in the duty of the PWM waveform.

#### **LED Drivers**

1. The LED driver must be able to correctly interpret the PWM waveforms supplied by the microcontroller and adjust the power to the LED so they can be dimmed

appropriately. The power delivered to the LEDs must be proportional to the duty ratio of the PWM.

### **LEDs**


1. Infrared LEDs: They usually have a voltage requirement of 1.2V with a +/-10% tolerance and they have a current rating of 20mA but cannot handle more than 40mA of current.
2. Visible LEDs: They can have a current flow of 10mA to 30 mA without damage and have a voltage drop of around 3.4V. The LEDs should be able to handle the power supplied by the LED drivers.

## **4. Tolerance Analysis**

Something that is highly critical to the success of our project is the ability to adjust the brightness of the LEDs. Since the output of the LEDs are interpreted by the human eyes, there is less emphasis and importance on the speed of the data being transmitted. So the transmission speed can be moderately fast. So this is not a design constraint. Ensuring accurate generation and transmission of the PWM signal is more important to the working of the project.

An illustrative analysis of setting the different brightness of the signal can look like:

Since LEDs typically have a current flow of 10-30mA, we can assume that the LEDs have a current flow of 20mA.

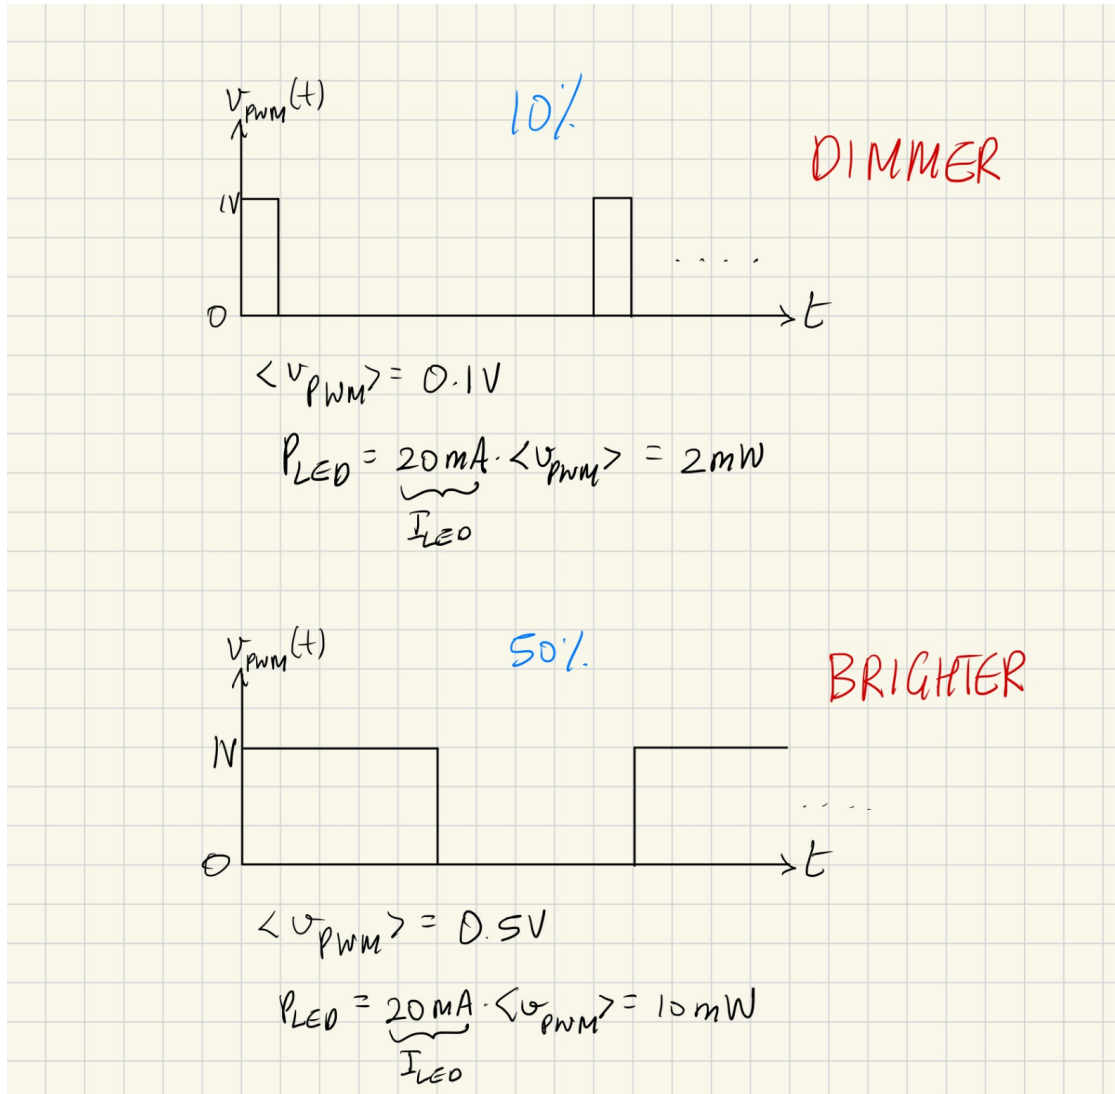

As seen above, this way the power to the LED can be adjusted and as long as the microcontroller can produce the PWM, the design will be successful. The microcontroller that we chose has two 8-bit timers and one 16-bit timer that can produce the PWM waveform.

## Ethics and Safety

Our project aims to create a controllable NIR and bright white LEDs that will help detect cancer cells. One thing that could be an issue is the safety of the LEDs. The first code in the IEEE Code of Ethics states “the safety, health, and welfare of the public.” Since we are trying to get the white LEDs as bright as possible, looking directly at the LED could damage our eyes during development and the users later. As a result, during development, we will be extra careful when handling the LED and unique eyewear when testing the brightness of the white LED. Not only that, the NIR LEDs can also damage the eyes since they emit longer wavelengths than visible light. If one were to look at the NIR LEDs for short periods directly, nothing would

happen, but it would still require attention when handling them. This would also apply to the user when using the product. The caution when handling the LED direction would ensure no damage to the eyes would happen to the user.

In the event that we test our project on a cancer patient, we will follow Section II of the IEEE Code of Ethics. We will “treat all persons fairly and with respect, and to not engage in discrimination”, “to not engage in harassment of any kind” and “to avoid injuring others, their property, reputation, or employment by false or malicious actions.” As said before, we will abide by codes 7, 8, and 9 of the IEEE code of Ethics with everyone involved in the testing.



## References

*ATMEGA328P - Microchip Technology,*

[www.microchip.com/en-us/product/ATMEGA328P](http://www.microchip.com/en-us/product/ATMEGA328P). Accessed 15 Sept. 2023.

*Description Features - Diodes Incorporated,*

[www.diodes.com/assets/Datasheets/BCR421UW6Q.pdf](http://www.diodes.com/assets/Datasheets/BCR421UW6Q.pdf). Accessed 15 Sept. 2023.

“IEEE Code of Ethics.” *IEEE*, [www.ieee.org/about/corporate/governance/p7-8.html](http://www.ieee.org/about/corporate/governance/p7-8.html). Accessed 14 Sept. 2023.

Utmel. “RP2040 vs Atmega328 vs Esp32 vs Stm32[Video]: Comparison Some Parameters of Microcontrollers.” *Utmel*, Utmel Electronics, 2 Mar. 2022,

[www.utmel.com/components/rp2040-vs-atmega328-vs-esp32-vs-stm32-comparison-some-parameters-of-microcontrollers?id=1471](http://www.utmel.com/components/rp2040-vs-atmega328-vs-esp32-vs-stm32-comparison-some-parameters-of-microcontrollers?id=1471).