

Chapter 3 – Instruction-Level Parallelism and its Exploitation (Part 4)

- ILP vs. Parallel Computers
- Dynamic Scheduling (Section 3.4, 3.5)
- Dynamic Branch Prediction (Section 3.3, 3.9, and Appendix C)
- Hardware Speculation and Precise Interrupts (Section 3.6)
- Multiple Issue (Section 3.7)
- Static Techniques (Section 3.2, Appendix H)
- Limits and Benefits of ILP (Older editions and Section 3.12)
- Multithreading (Section 3.11)
- Putting it Together (Mini-projects)

1

Limits of ILP

- How much can ILP buy us?
- Limits studies make optimistic assumptions to find the limit for ILP
 - But may miss impact of compiler, future advances
- A highly optimistic study [Wall'93]
 - Infinite number of physical registers (no register WAW, WAR)
 - Infinite number of in-flight instructions
 - Perfect branch prediction
 - Perfect memory address alias analysis
 - Single cycle FU
 - Single cycle memory (perfect caches)

2

Limits of ILP (contd.)

(This and next four figures are from an old edition of the book)

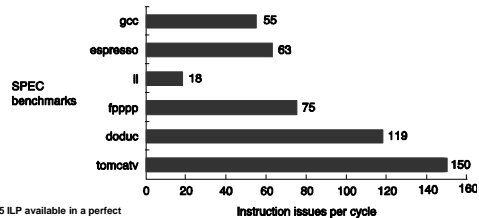


Figure 3.35 ILP available in a perfect processor for six of the SPECint32 benchmarks. The first three programs are integer programs, and the last three are floating-point programs. The floating-point programs are loop-intensive and have large amounts of loop-level parallelism.

© 2003 Elsevier Science (USA). All rights reserved.


* This figure has been taken from Computer Architecture, A Quantitative Approach, 3rd Edition Copyright 2003 by Elsevier Inc. All rights reserved. It has been used with permission by Elsevier Inc.

3

Limits of ILP – Impact of Optimistic Assumptions

- Limiting Instruction window size
 - Finding dependences among n instr requires n^2 comparisons
 - 2000 instructions implies 4 million comparisons!
 - Following use 2K window and 64 issue limit


Figure 3.36 The effects of reducing the size of the window. The window is the group of instructions from which an instruction can execute. The start of the window is the earliest uncompleted instruction (remember that instructions complete in one cycle), and the last instruction in the window is determined by the window size. The instructions in the window are obtained by perfectly predicting branches and selecting instructions until the window is full.

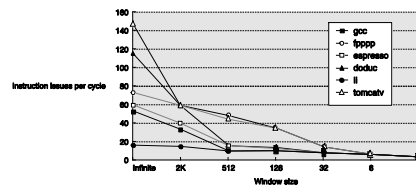


© 2003 Elsevier Science (USA). All rights reserved.

* This figure has been taken from Computer Architecture, A Quantitative Approach, 3rd Edition Copyright 2003 by Elsevier Inc. All rights reserved. It has been used with permission by Elsevier Inc.


4

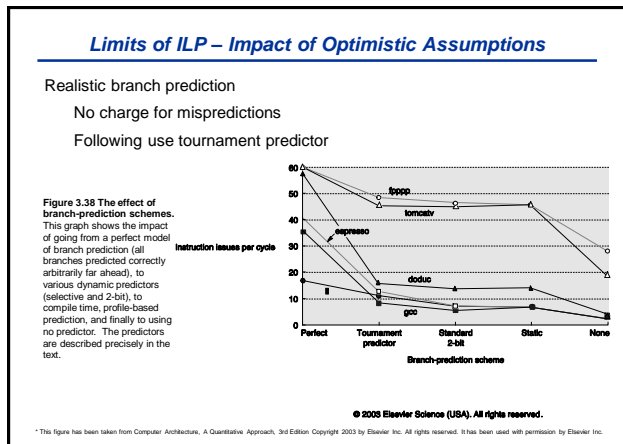

5

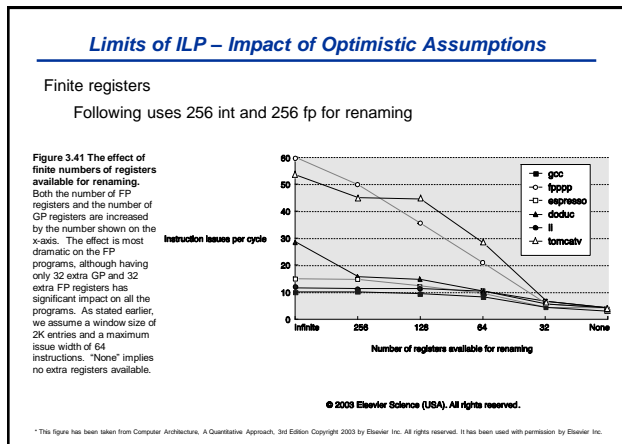

6

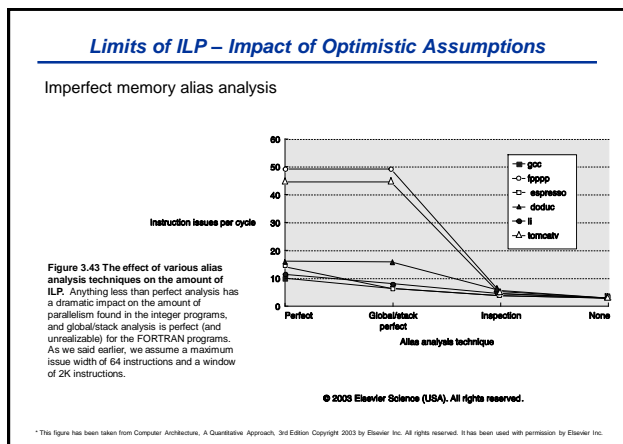

7

But Limits Studies may be Pessimistic!

For most optimistic study

- WAR and WAW hazards through memory
- Unnecessary dependences (e.g., loop iteration count)
- Overcoming data flow limit – value prediction

For more realistic studies

- Address value prediction and speculation
- Speculating on multiple paths

8

Real Systems: Two Out-of-order i7 Processors

Resource	i7 920 (Nehalem)	i7 6700 (Skylake)
Micro-op queue (per thread)	28	64
Reservation stations	36	97
Integer registers	NA	180
FP registers	NA	168
Outstanding load buffer	48	72
Outstanding store buffer	52	56
Reorder buffer	128	256

Figure 3.39 The buffers and queues in the first generation i7 and the latest generation i7. Nehalem used a reservation station plus reorder buffer organization. In later microarchitectures, the reservation stations serve as scheduling resources, and register renaming is used rather than the reorder buffer; the reorder buffer in the Skylake microarchitecture serves only to buffer control information. The choices of the size of various buffers and renaming registers, while appearing sometimes arbitrary, are likely based on extensive simulation.

© 2019 Elsevier Inc. All rights reserved.

9

9

Two Out-of-order i7 Processors




Figure 3.40 The CPI for the SPECint2006 benchmarks on the i7 6700 and the i7 920. The data in this section were collected by Professor Lu Peng and PhD student Qun Liu, both of Louisiana State University.

© 2019 Elsevier Inc. All rights reserved.

10

10

Out-of-order i7 vs. In-order Atom

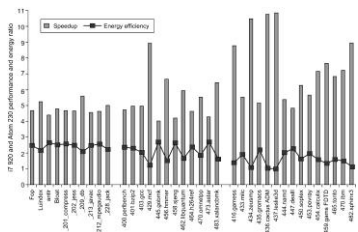


Figure 3.43 The relative performance and energy efficiency for a set of single-threaded benchmarks shows the i7 920 is 4 to over 10 times faster than the Atom 230 but that it is about 2 times less power-efficient on average! Performance is shown in the columns as i7 relative to Atom, which is execution time (i7)/execution time (Atom). Energy is shown with the line as Energy (Atom)/Energy (i7). The i7 never beats the Atom in energy efficiency, although it is essentially as good on four benchmarks, three of which are floating point. The data shown here were collected by Esmatizadeh et al. (2011). The SPEC benchmarks were compiled with optimization using the standard Intel compiler, while the Java benchmarks use the Sun (Oracle) Hotspot Java VM. Only one core is active on the i7, and the rest are in deep power-saving mode. Turbo Boost is used on the i7, which increases its performance advantage but slightly decreases its relative energy efficiency.

© 2019 Elsevier Inc. All rights reserved.

11

11

Multithreading: Instruction + Thread Level Parallelism

Often superscalar instruction slots are wasted
Why not use them for other threads?

Multithreading


Coarse-grained

Fine-grained


Simultaneous multithreading (SMT) or hyperthreading

(Vs. multiprocessing)

12

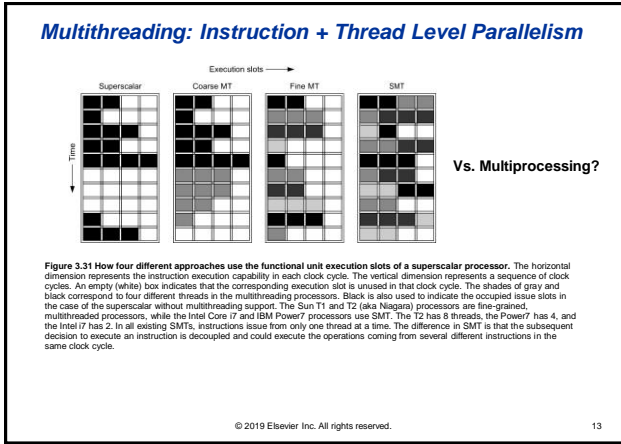

13

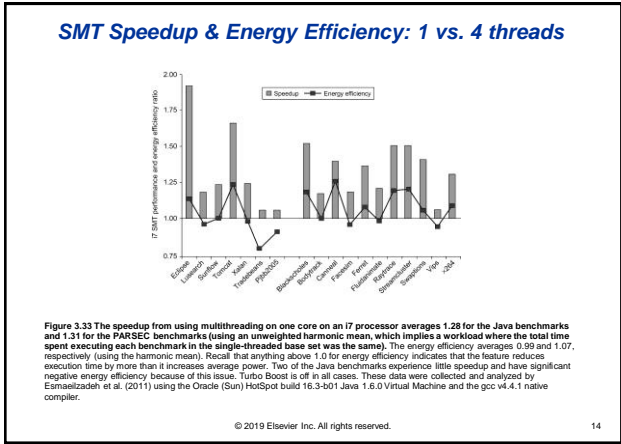

14