

CS/ECE 439: Wireless Networking

MAC Layer – Power!

Energy Conservation Techniques

- ▶ Wi-Fi devices consume significant amounts of energy when idle
 - ▶ Idle $> 1W$
- ▶ Conservation Approach: Device suspension (sleep)
 - ▶ Reduced energy consumption
 - ▶ Sleep $\sim 0.05W$
 - ▶ Suspended communication capabilities
 - ▶ Buffer overflow
 - ▶ Wasted bandwidth
 - ▶ Lost messages
 - ▶ If all nodes are asleep, no one can communicate!



Communication Device Suspension

▶ Goal

- ▶ Remain awake when there is active communication
- ▶ Otherwise, suspend
- ▶ Adapt the sleep duration to reflect the communication patterns of the application

▶ Ideal

- ▶ Sleep whenever there is no data to receive from the base station
- ▶ Wake up for any incoming receptions



Communication Device Suspension

▶ Problems

- ▶ How can a sender differentiate between a suspended node and a node that has gone away?
 - ▶ Suspended receiver \Rightarrow buffer packet
 - ▶ Confused sender \Rightarrow dropped packet, extra energy consumption
- ▶ How can a suspended node know there is communication for it?
 - ▶ Wake up too soon \Rightarrow waste energy
 - ▶ Wake up too late \Rightarrow delay/miss packets



Communication Device Suspension

- ▶ **Approach**

- ▶ Ensure overlap between sender's and receiver's awake times

- ▶ **Protocols**

- ▶ Triggered Resume
 - ▶ Periodic Resume
 - ▶ Synchronous
 - ▶ Asynchronous



Triggered Resume

▶ Approach

- ▶ Use a second control channel (second radio)
 - ▶ Sender transmits RTS or beacon messages in control channel
 - ▶ Receiver replies in control channel and turns on main channel
- ▶ Main channel is only used for data
- ▶ Second channel
 - ▶ Must consume less energy than the main channel
 - ▶ Must not interfere with the main channel
 - ▶ Ex: BLE, ZigBee, RFID, 915Mhz



Triggered Resume


▶ Approach – Data only – PAMAS

▶ Data channel

- ▶ Power off radio when data is destined to a different node

▶ Control channel


- ▶ Probe neighbors to find longest remaining transfer

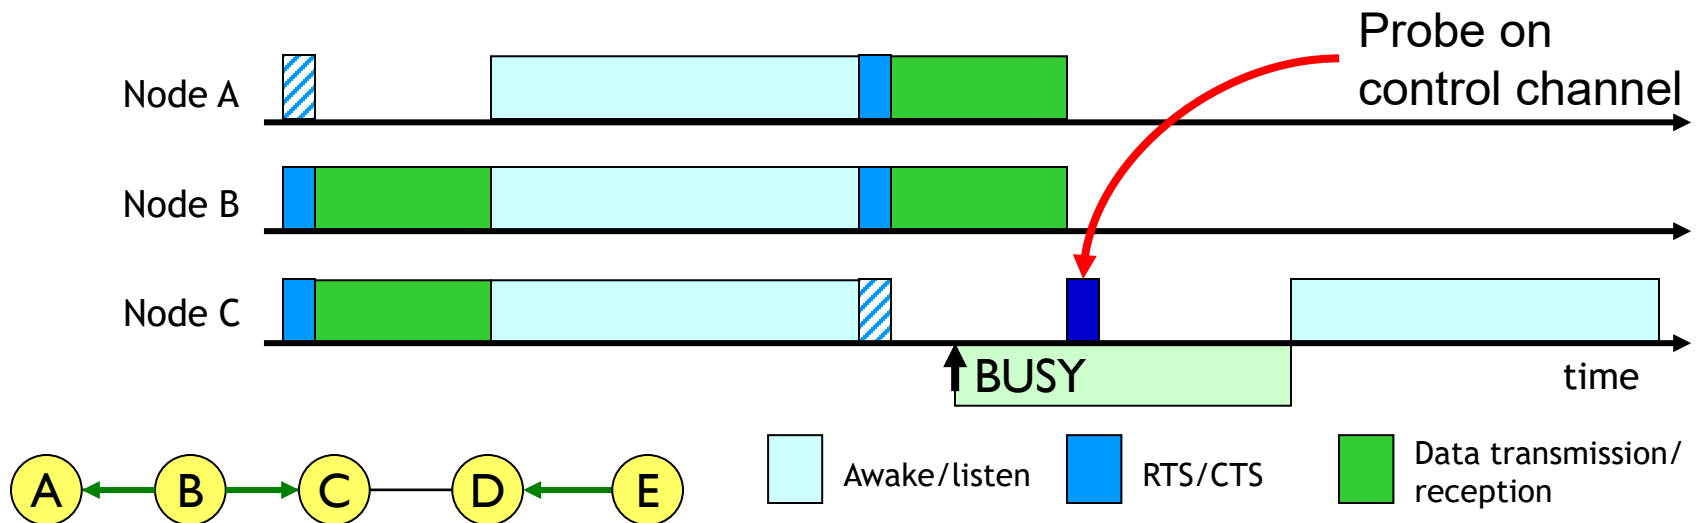

Triggered Resume



▶ Dual radio

- ▶ Low duty cycle paging channel to wake up a neighboring node
- ▶ Use separate radio for the paging channel to avoid interference with regular data forwarding
- ▶ Trades off energy savings for setup latency

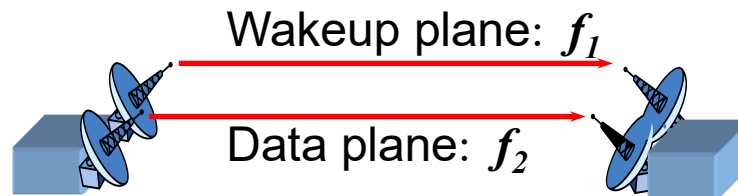

Triggered Resume

► Dual radio

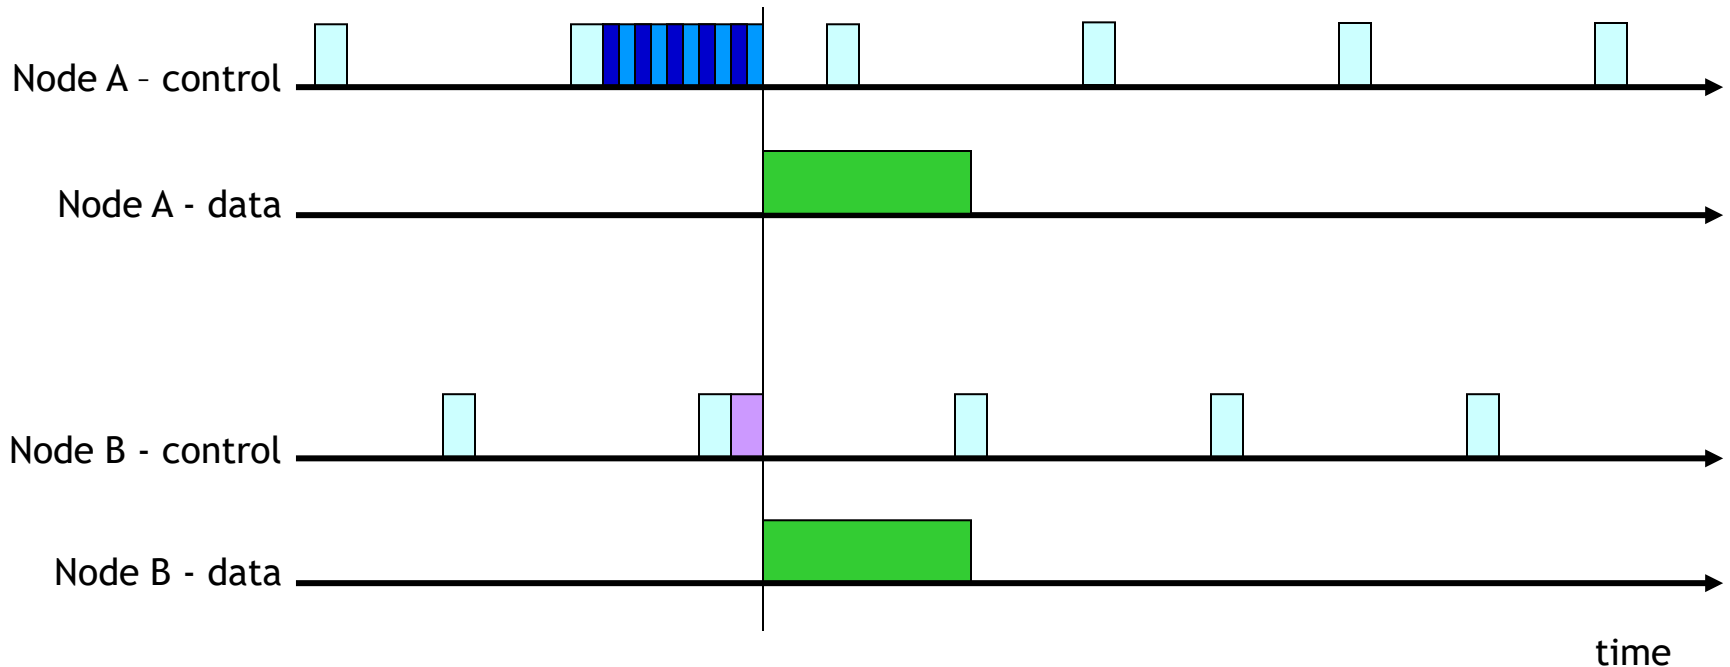

Triggered Resume

▶ Challenges

- ▶ Two radios are more complex than one
- ▶ Channel characteristics may not be the same for both radios
 - ▶ A successful RTS on the control channel does not guarantee a the reverse channel works
 - ▶ A failed RTS on the control channel does not indicate that the reverse channel does not work



Periodic Resume

▶ Approach

- ▶ Suspend most of the time
- ▶ Periodically resume to check for pending communication

▶ Communication indications

- ▶ Out-of-band channel
- ▶ In-band signaling

▶ Protocols


- ▶ Synchronous
- ▶ Asynchronous



Synchronous Periodic Resume

▶ Basic Idea

- ▶ Time is slotted
- ▶ Nodes selectively remain awake for full slot duration
- ▶ Discovery occurs when two active slots overlap
- ▶ If all nodes are synchronized, all nodes are guaranteed to have overlapping awake periods

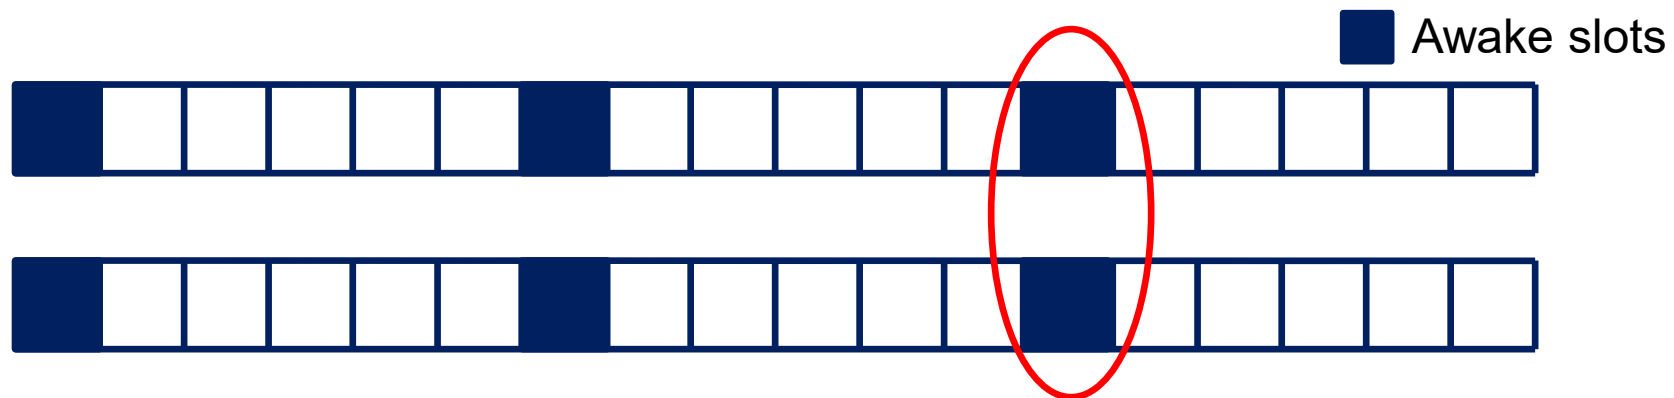


Synchronous Periodic Resume

- ▶ **Protocol: IEEE 802.11 Power Save Mode (PSM)**
 - ▶ Nodes are synchronized and wakeup periodically (Beacon Period)
 - ▶ Each beacon period is broken up into two segments
 - ▶ Ad-hoc Traffic Indication Map (ATIM) Window
 - Announcement in the ATIM indicates data
 - Target node responds with an ATIM ACK
 - If a node receives no announcements, it goes back to sleep
 - ▶ Transmission period
 - Sender can transmit packet until the end of the beacon period



Synchronous Periodic Resume

▶ IEEE 802.11 PSM

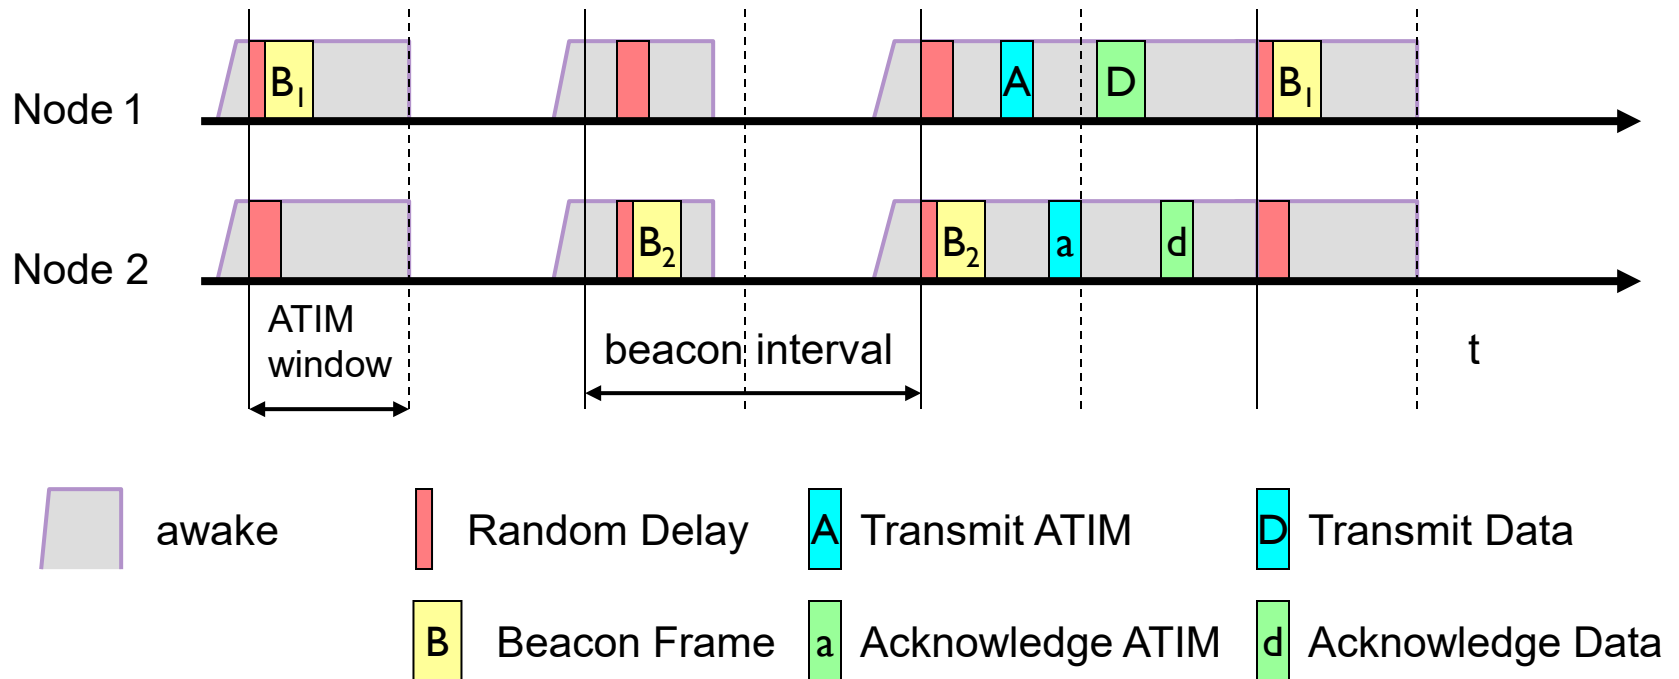

Synchronous Periodic Resume

- ▶ **Centralized solution**

- ▶ Synchronization driven by base station
- ▶ In beacon message


- ▶ **Distributed solution**

- ▶ No base station
- ▶ Synchronization protocols can be used to loosely synchronize nodes
 - ▶ Nodes wake up for a short period and check for channel activity
 - ▶ Return to sleep if no activity detected



Distributed Synchronous Periodic Resume


- ▶ Persistent loose synchronization
 - ▶ Constant, high synchronization overhead

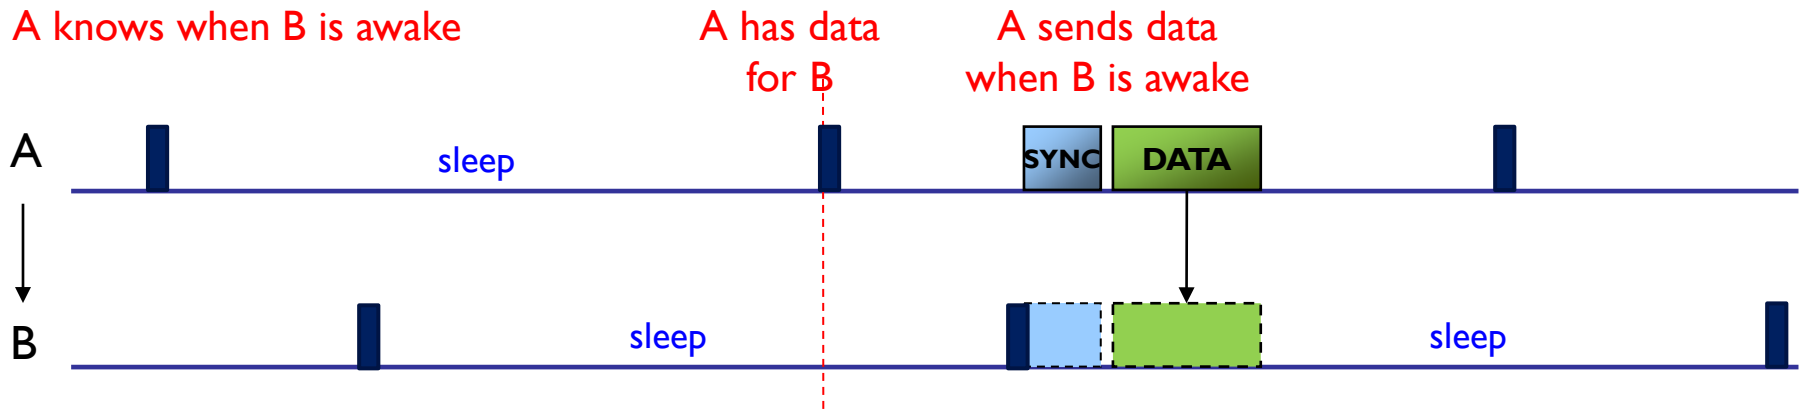

Distributed Synchronous Periodic Resume

▶ Signaling

- ▶ No synchronization overhead
- ▶ High signaling overhead
 - ▶ Long preambles, all nodes wake up

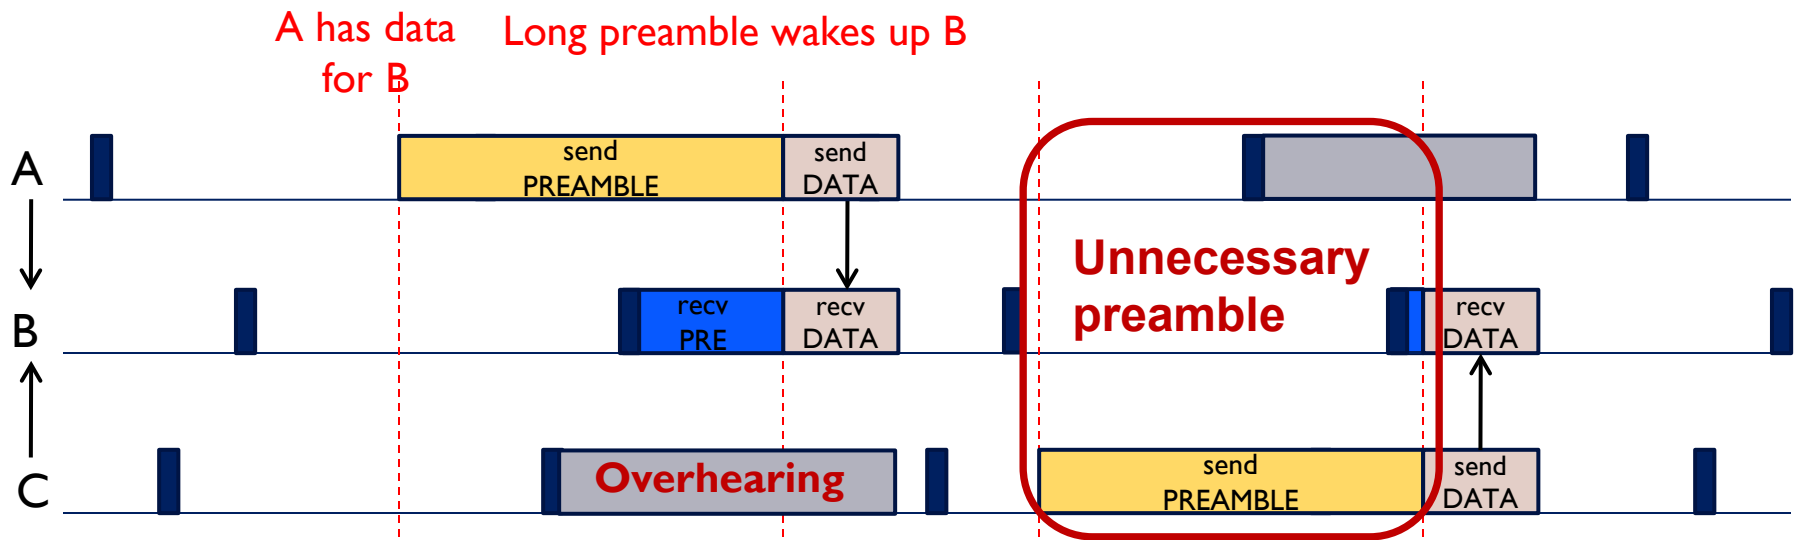


Distributed Synchronous Periodic Resume

▶ Signaling: Wake-up packets

- ▶ Send wake-up packets instead of preamble
- ▶ Wake-up packets tell when data is starting so that receiver can go back to sleep as soon as it receives one wake-up packet

A has data
for B

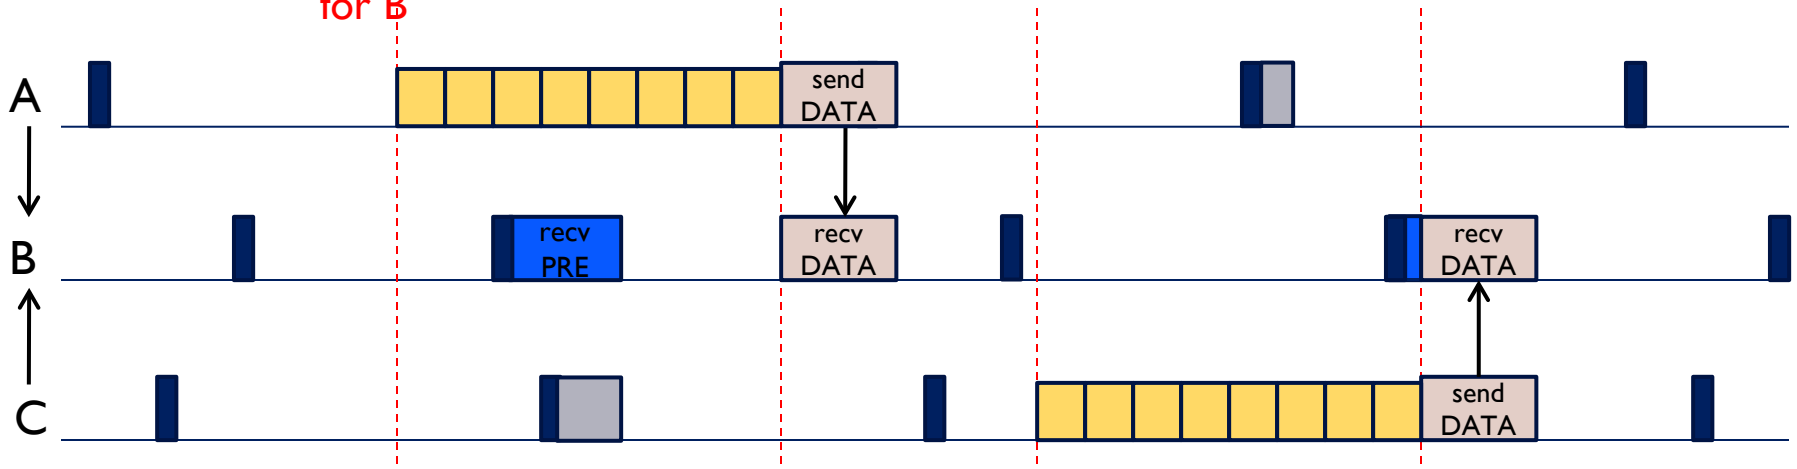

Distributed Synchronous Periodic Resume

- ▶ **Signaling: Multiple send**
 - ▶ Send data several times
 - ▶ Receiver can listen at any time and get all data

- ▶ **Problem with all approaches**
 - ▶ Communication costs are mostly paid by the sender
 - ▶ The amount of time the sender spends transmitting may be much longer than the actual data length



Synchronous Periodic Resume

▶ Problems


- ▶ Maintaining synchronization may be difficult
- ▶ Throughput is limited by the size of the notification window
 - ▶ If the notification window is too small, packets get buffered
 - ▶ Buffers may eventually overflow



Asynchronous Periodic Resume

► Approach


- Stay awake longer to guarantee overlap of awake periods
- Overlap is guaranteed if the awake periods are more than half the beacon period

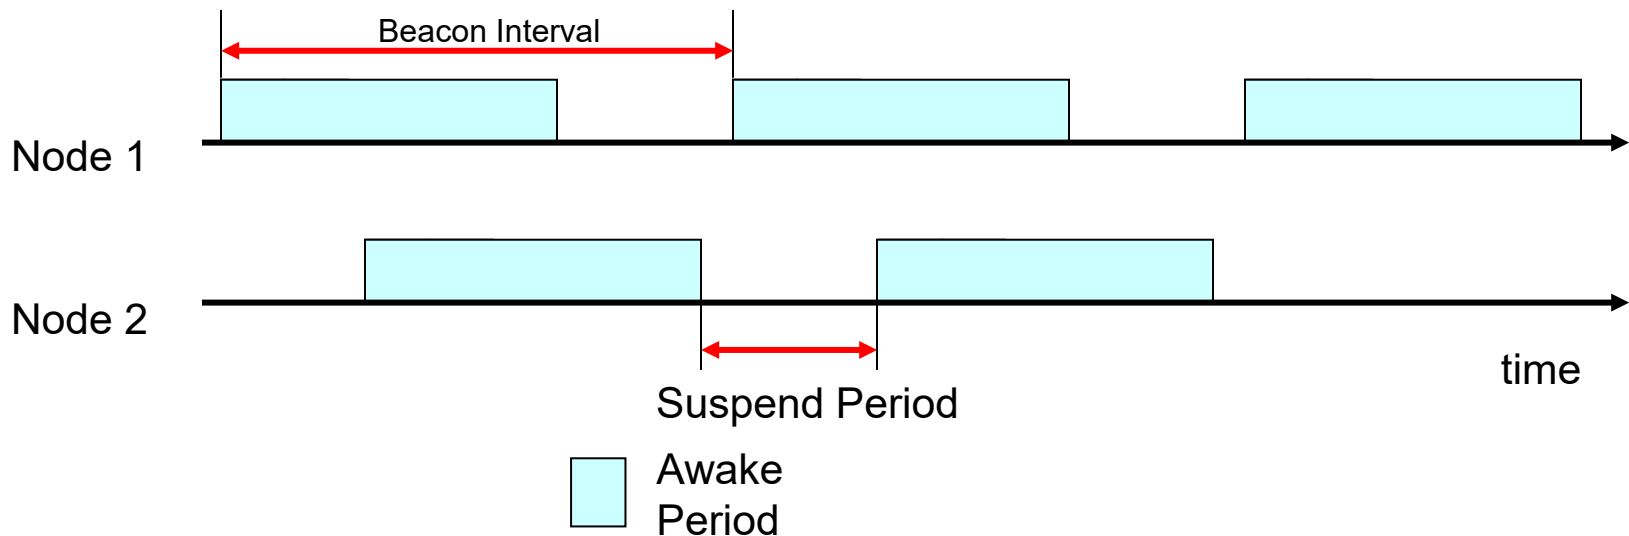

Asynchronous Periodic Resume

▶ Basic protocol


- ▶ Use beacon messages at the start of awake periods
- ▶ Some protocols use notification messages (similar to ATIM)

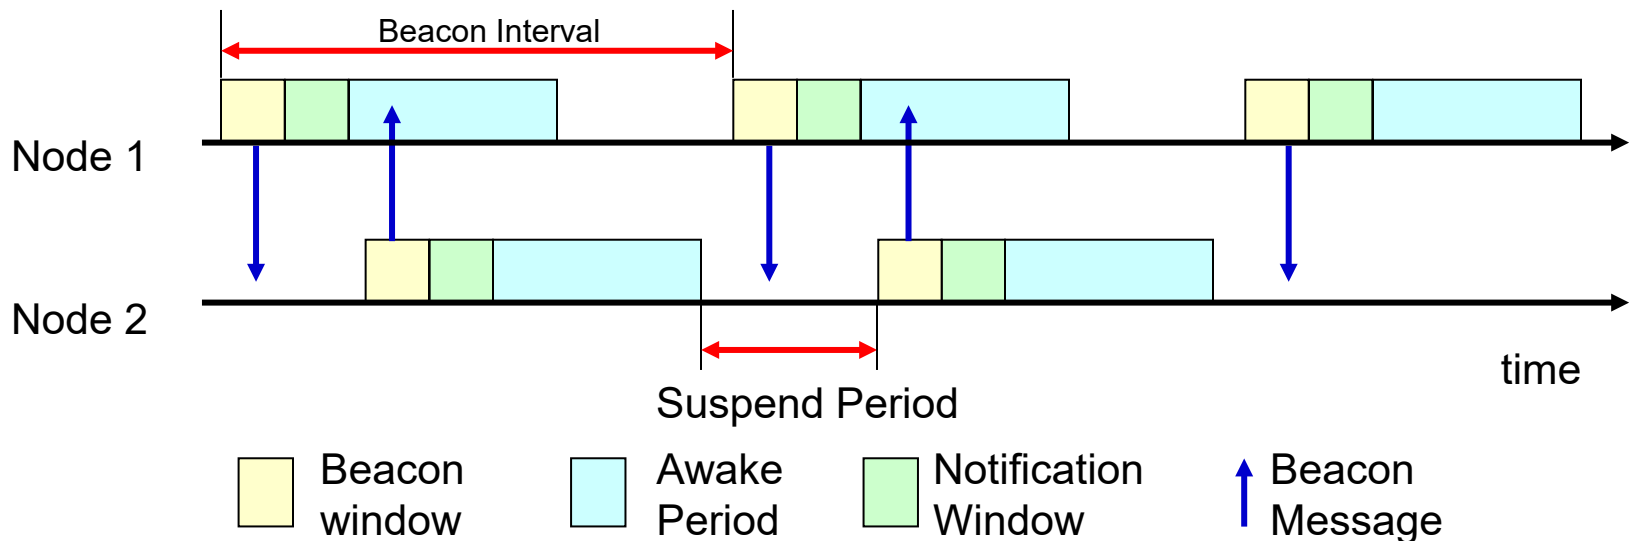

Asynchronous Periodic Resume

► Problem


- No guarantee that all nodes will hear each other's beacon or notification messages

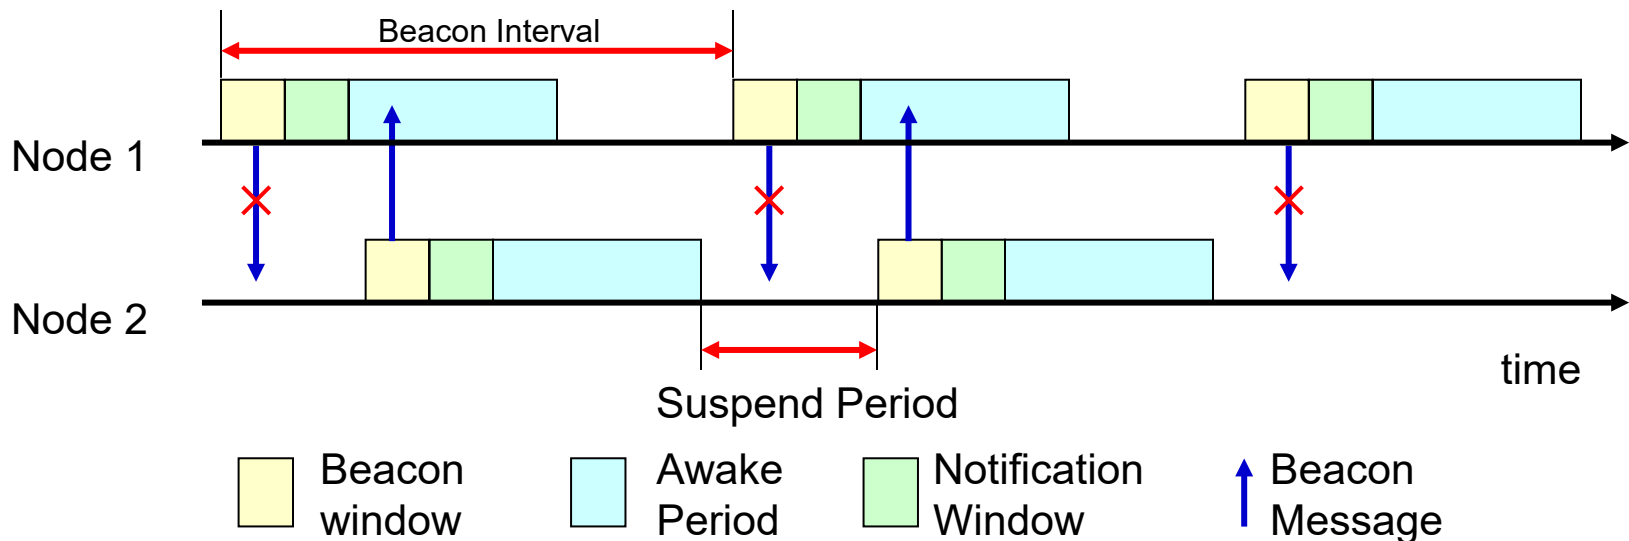

Asynchronous Periodic Resume

► Solution


- Have a beacon at the beginning and end of the beacon interval

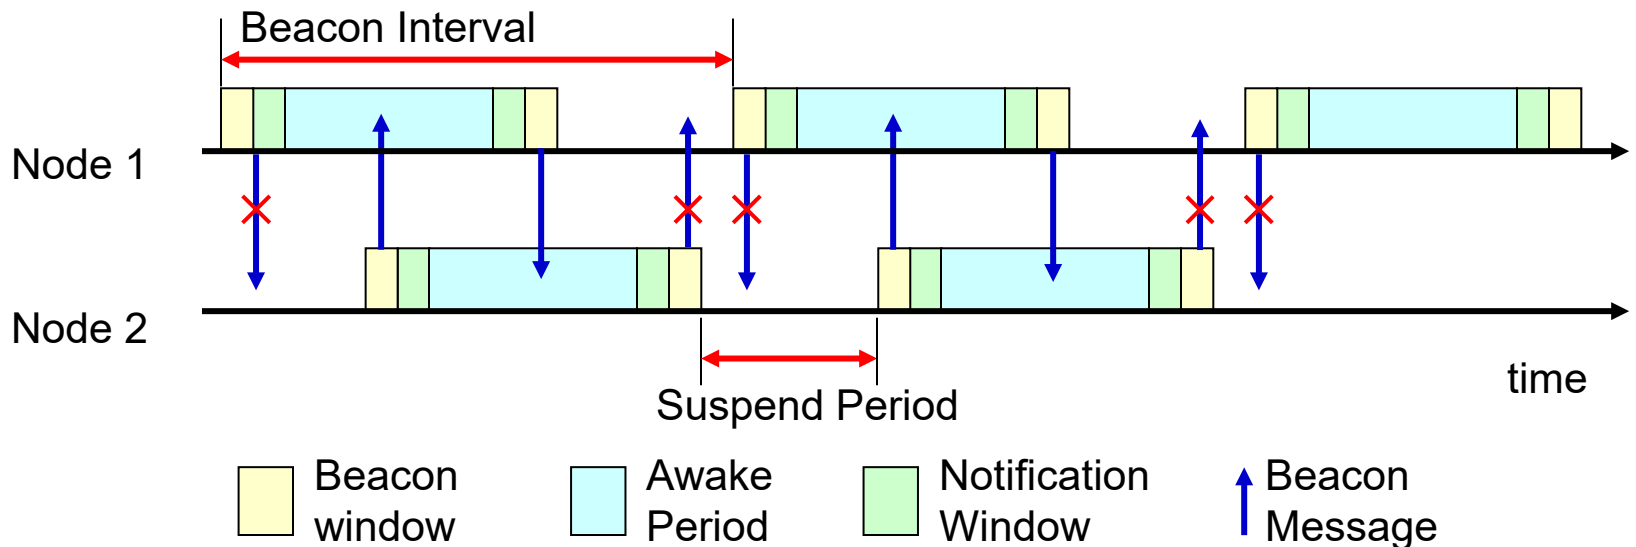

Asynchronous Periodic Resume

▶ Alternate solution


- ▶ Beacon at the beginning of odd periods
- ▶ Beacon at the end of even periods

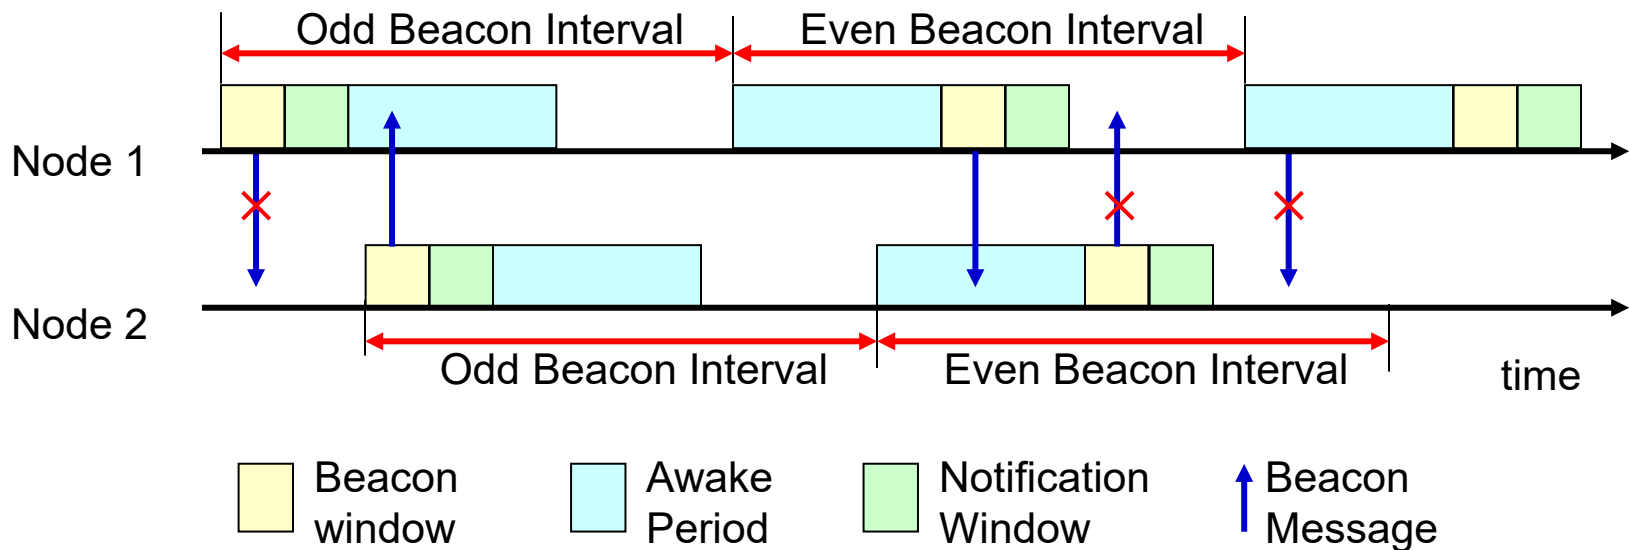

Asynchronous Periodic Resume


▶ Problem

- ▶ Nodes stay awake more than half the time
- ▶ Wastes too much energy!

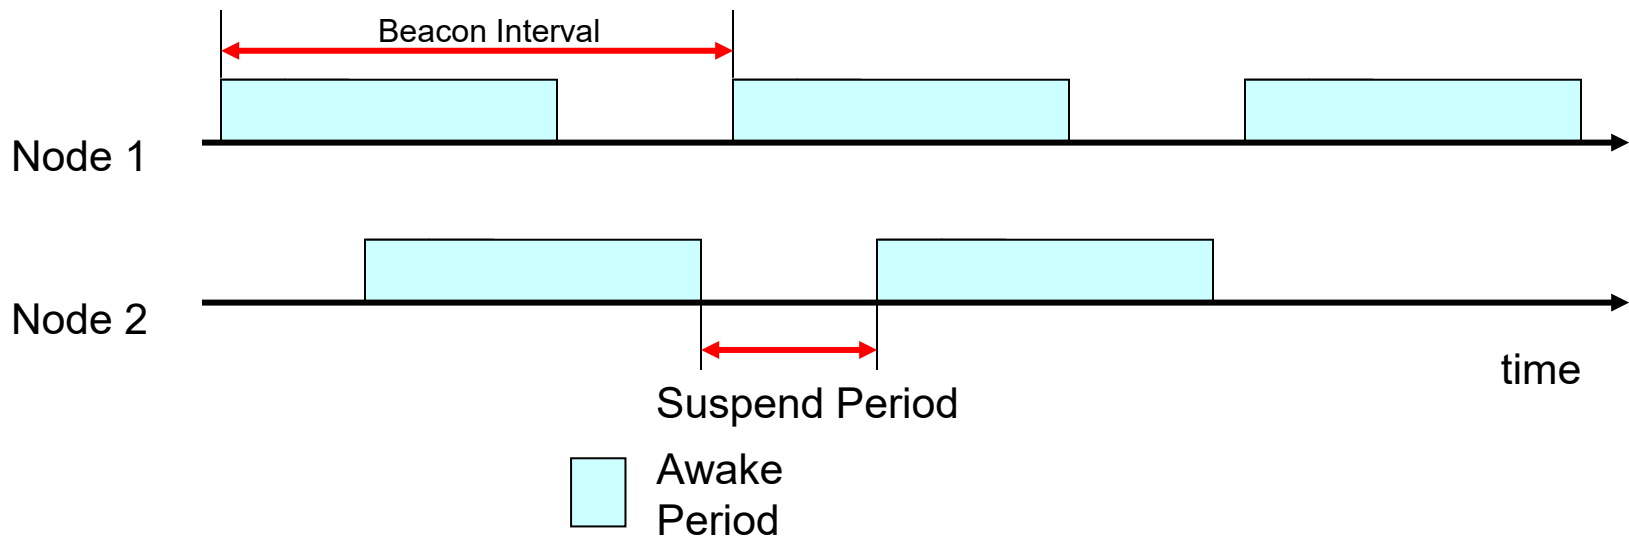

Asynchronous Periodic Resume

- ▶ Reduce awake time
 - ▶ Do not wake up every beacon interval
 - ▶ Delay depends on number of overlapping intervals

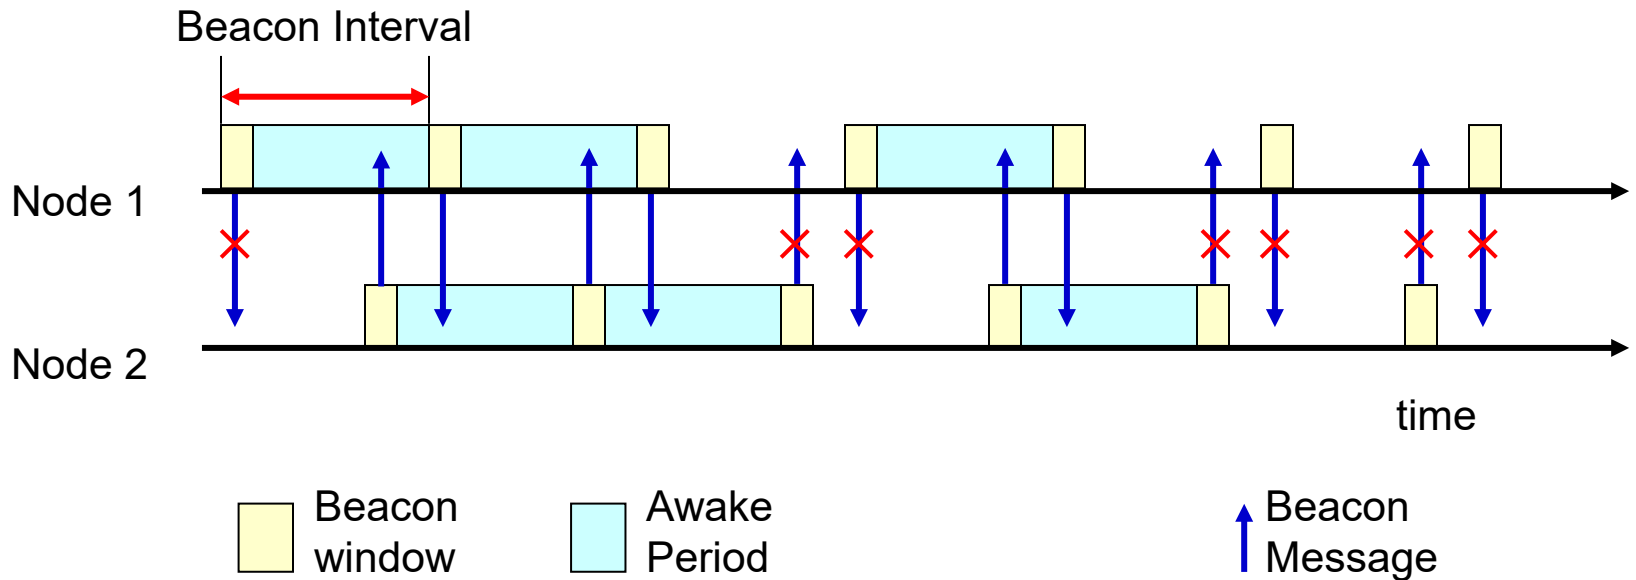


Asynchronous Periodic Resume

- ▶ Randomized Approach


- ▶ Birthday protocol

- ▶ Randomly select a slot to wake up in with a given probability
 - ▶ Advantage
 - Good average case performance
 - ▶ Disadvantage
 - No bounds on worst-case discovery latency

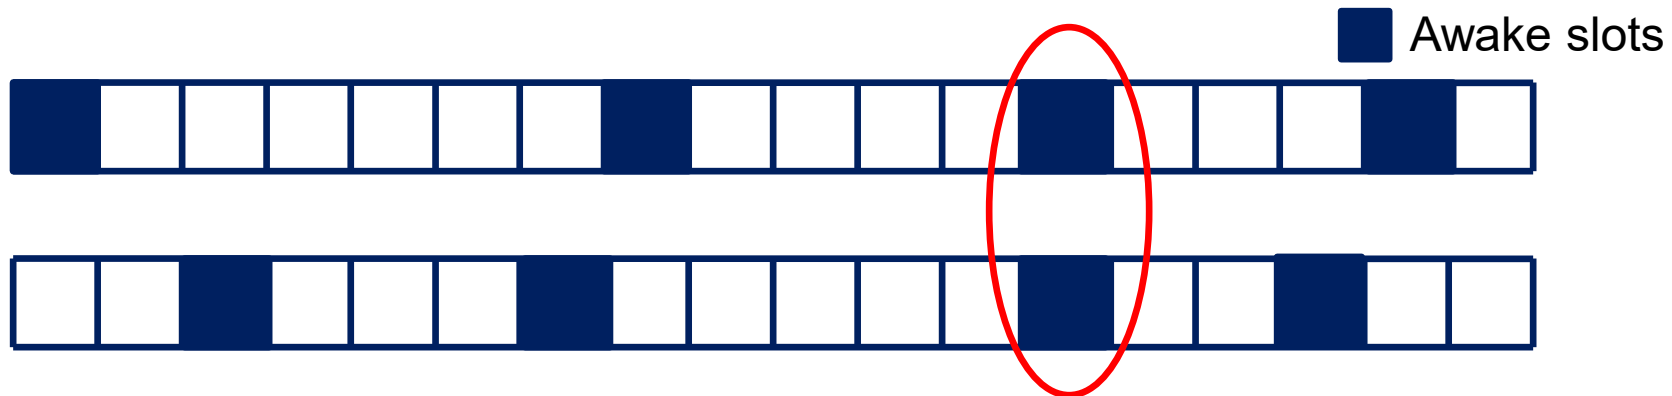

Asynchronous Periodic Resume


- ▶ **Extended sleep**
 - ▶ Wake up once every T intervals
 - ▶ Adds delay up to $T \times$ length of beacon interval

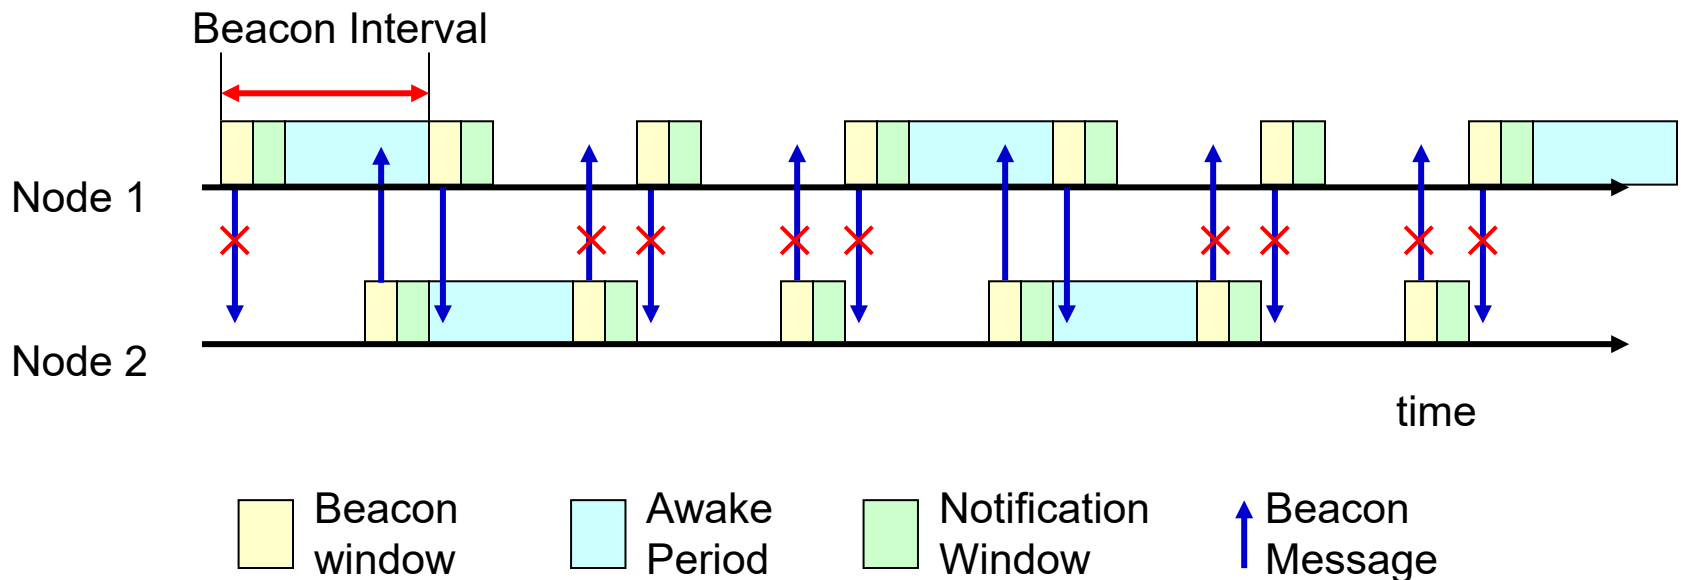

Asynchronous Periodic Resume

▶ Quorum

- ▶ Increase number of beacon intervals in cycle (n)
- ▶ Increase number of awake periods ($2n - 1$ of n^2)

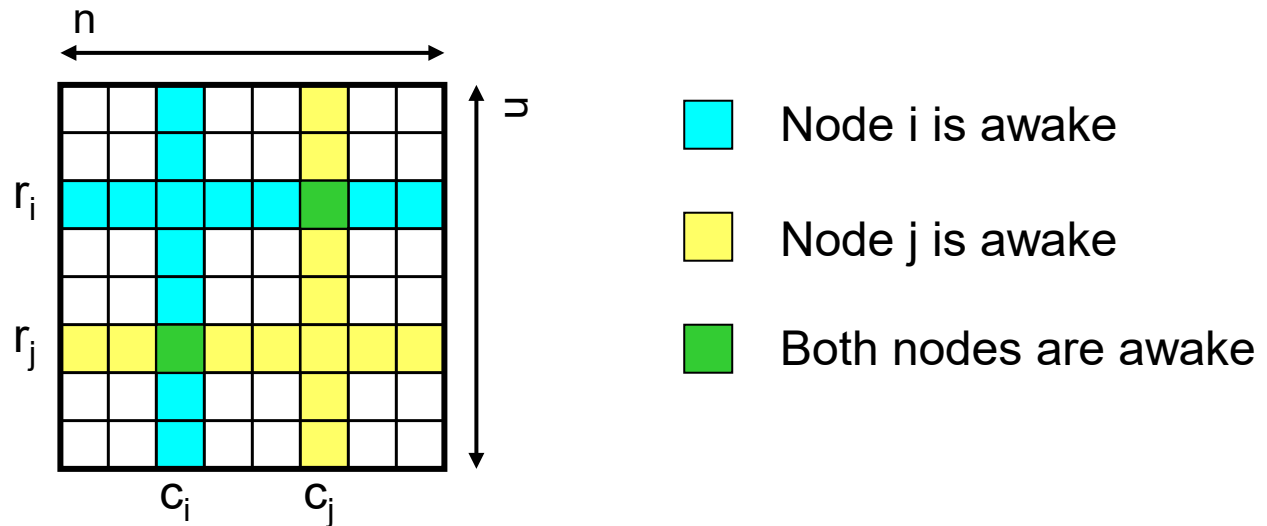


Delay is determined by where the overlap is (worst case n^2)

Asynchronous Periodic Resume

▶ Quorum


- ▶ Example: $n = 4$, $n^2 = 16$, $2n-1 = 7$
 - ▶ Two overlapping intervals: delay = $n^2 - 2$

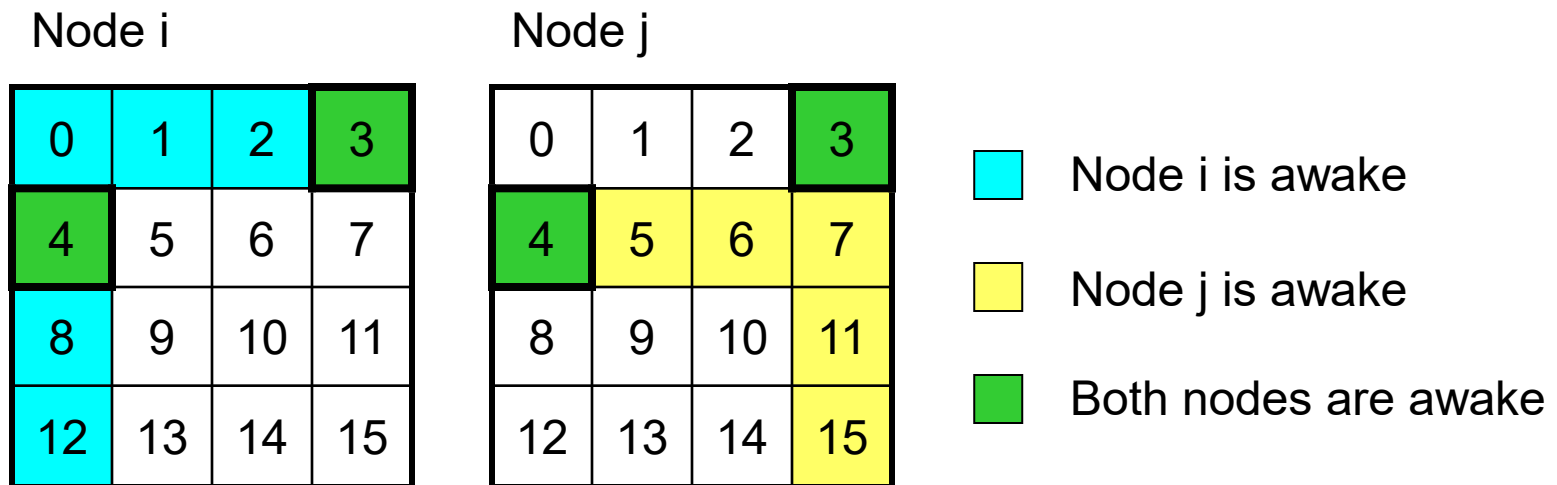

Asynchronous Periodic Resume


▶ Deterministic

- ▶ Find a feasible overlapping pattern
 - ▶ Guarantee at least one overlapping interval
 - ▶ Requires knowledge of number of nodes

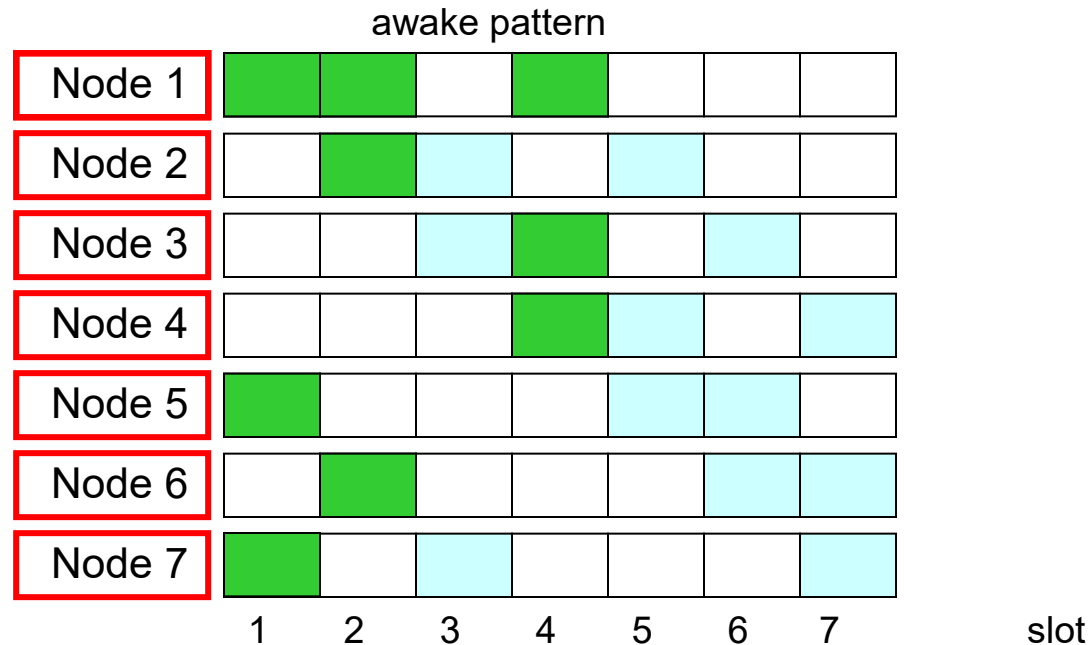

Asynchronous Periodic Resume

- ▶ **Deterministic: Prime-based**
 - ▶ Disco
 - ▶ Pick two primes p_1 and p_2
 - ▶ Wake up every p_1 and p_2 slot
 - ▶ Guarantees discovery in $p_1 \times p_2$ slots

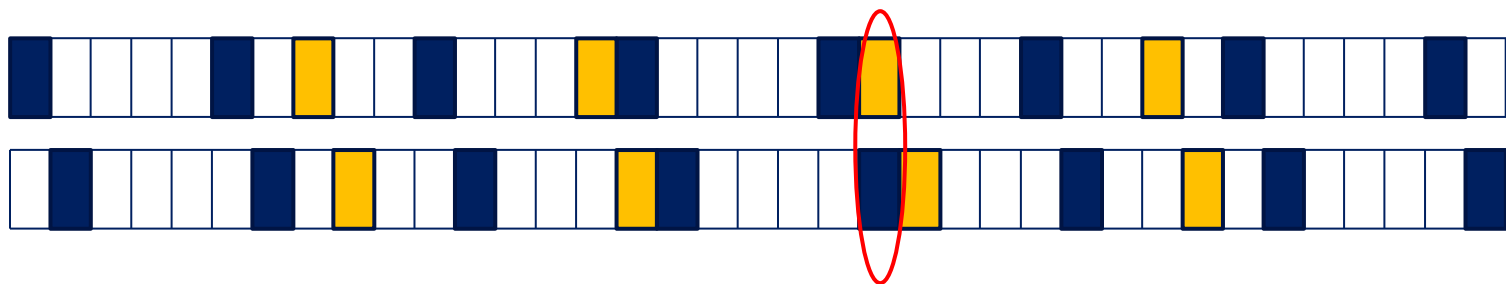


Asynchronous Periodic Resume

- ▶ **Deterministic: Prime-based**

- ▶ U-Connect


- ▶ Select 1 prime p
 - ▶ Wake up every p th slot and $(p-1)/2$ slots every p^2 slots
 - ▶ Overlap is guaranteed within p^2 slots

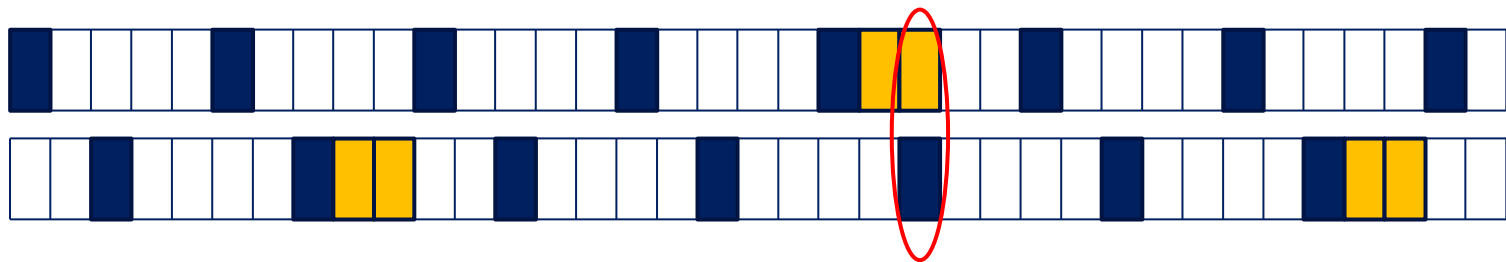

Asynchronous Periodic Resume

▶ Searchlight


- ▶ Have a **deterministic** discovery schedule that has a **pseudo-random** component

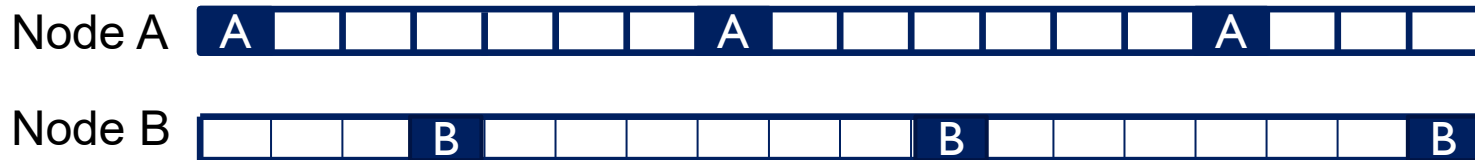

Asynchronous Periodic Resume

▶ Searchlight

- ▶ Two slots per t slots (period)
 - ▶ Anchor slot: Keep one slot fixed at slot 0
 - ▶ Probe slot: Move around the other slot sequentially
- ▶ Guaranteed overlap in $t^*t/2$ slots
 - ▶ Based on the time needed to ensure a probe-anchor overlap
- ▶ Probe-probe overlap can also lead to discovery
 - ▶ Sequential scanning means less chance of a probe-probe overlap

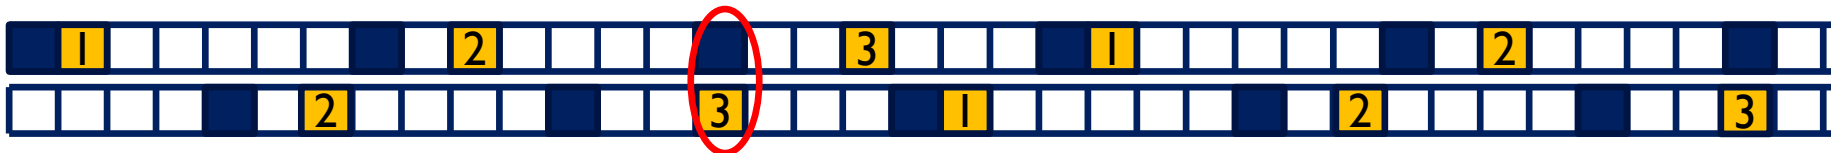


Discovery through anchor-probe overlap



Asynchronous Periodic Resume

▶ Searchlight

- ▶ Extension: randomized probing
 - ▶ Move the probe slot randomly
- ▶ Each node randomly chooses a schedule for its probe slot that repeats every $(t * t/2)$ slots
 - ▶ Schedules of two nodes appear random to each other
- ▶ Advantage
 - ▶ Retains the same worst-case bound
 - ▶ Improves average case performance

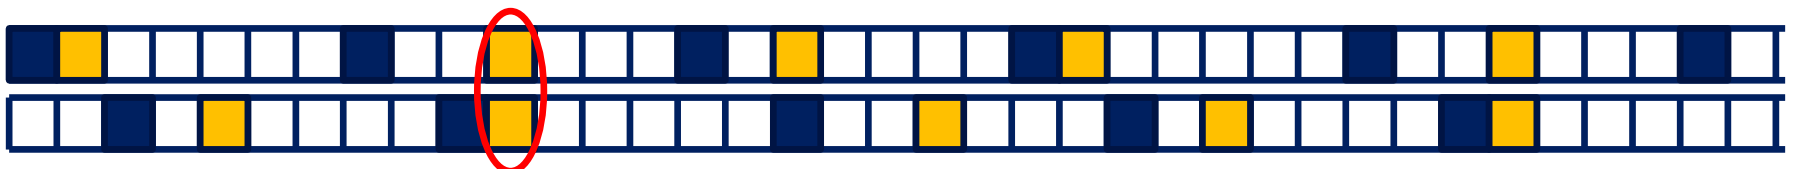

Discovery through probe-probe overlap



Asynchronous Periodic Resume

▶ Challenges

- ▶ Reducing time spent awake
- ▶ Reducing delay
- ▶ No support for broadcast
 - ▶ None of the current approaches provide an interval where all nodes are awake

