

# Computational Approaches to Cameras

11/16/17



Magritte , *The False Mirror*(1935)


Computational Photography  
Derek Hoiem, University of Illinois

# Announcements

- Final project proposal due Monday (see links on webpage)


# Conventional cameras

- Conventional cameras are designed to capture light in a medium that is directly viewable

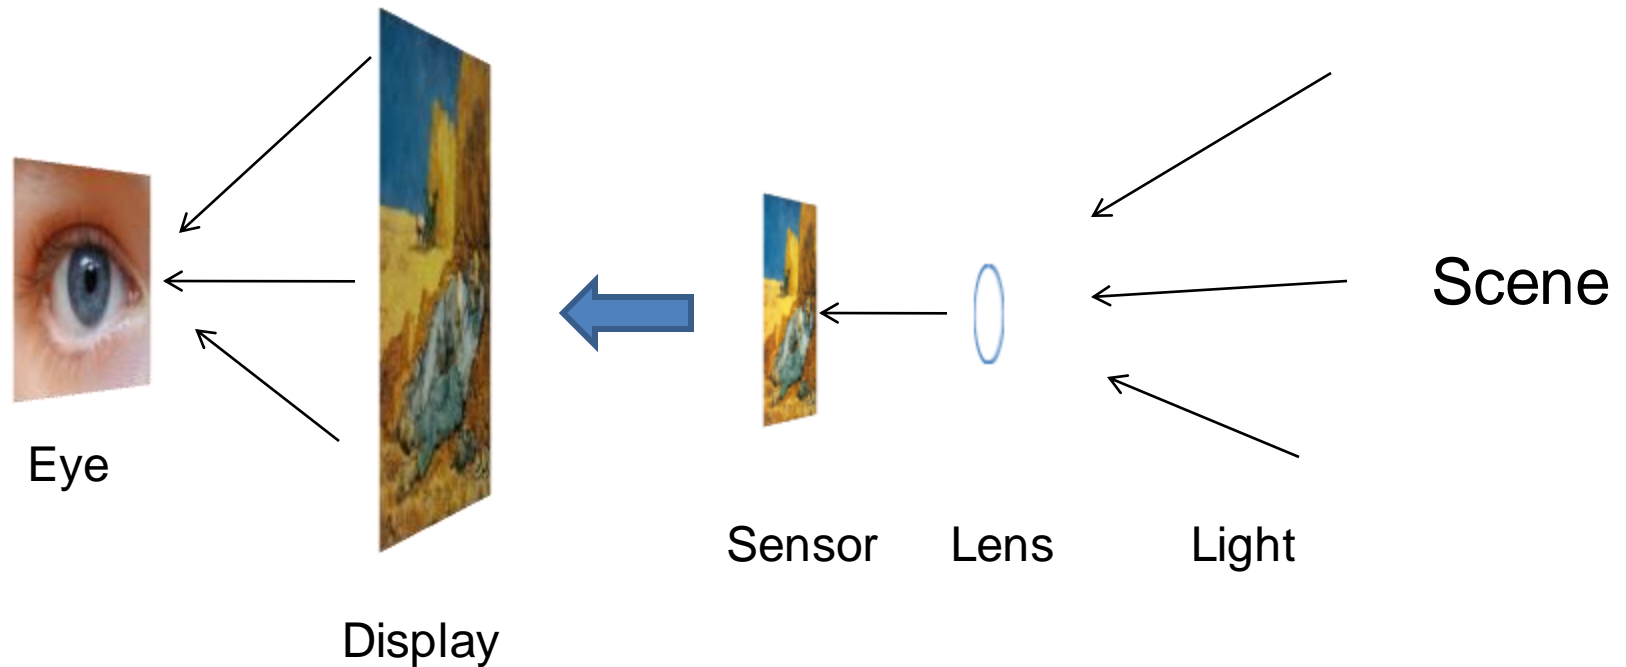

# Computational cameras

- With a computational approach, we can capture light and then figure out what to do with it

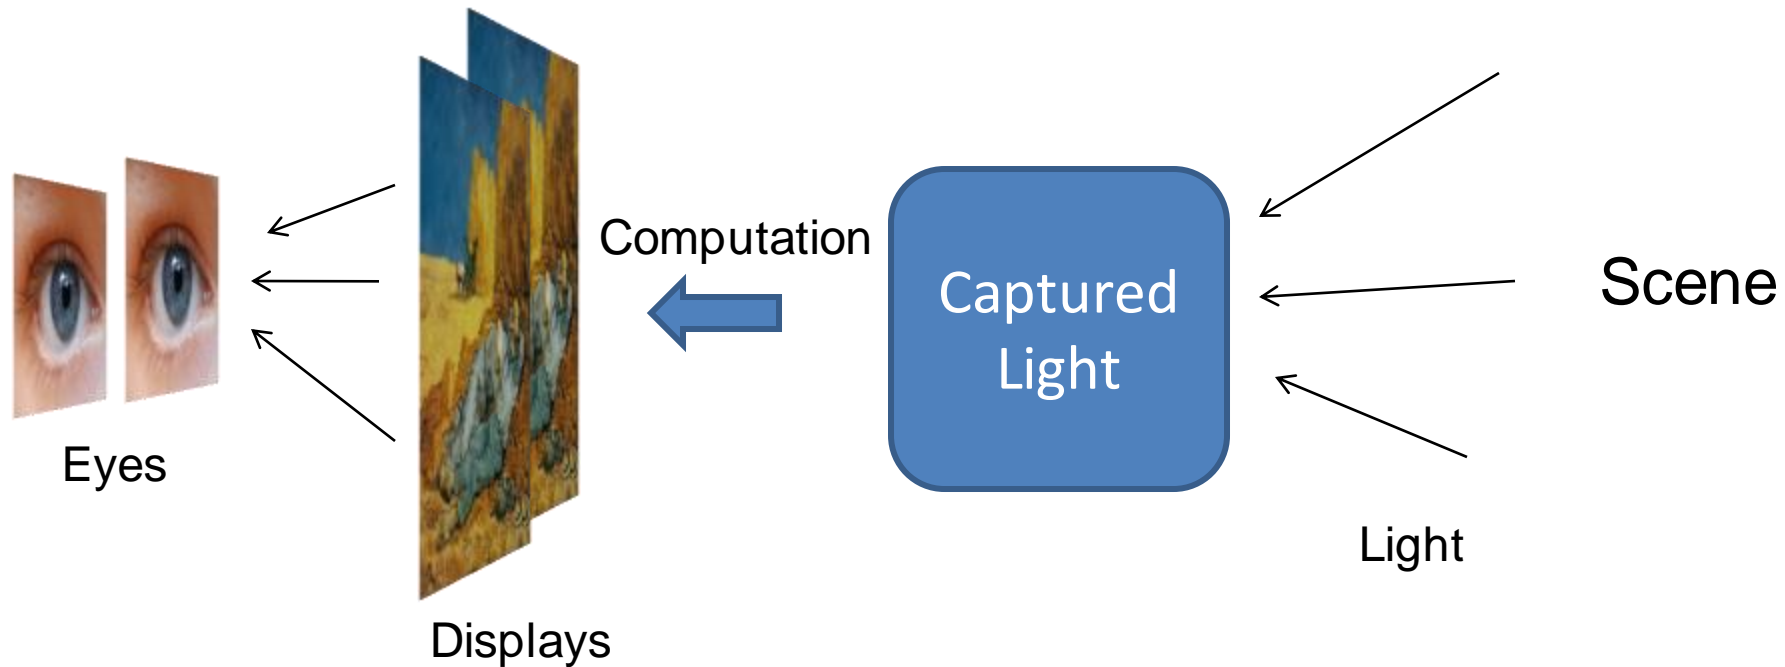

# Questions for today

- How can we represent all of the information contained in light?
- What are the fundamental limitations of cameras?
- What sacrifices have we made in conventional cameras? For what benefits?
- How else can we design cameras for better focus, deblurring, multiple views, depth, etc.?

# Representing Light: The Plenoptic Function

---



Figure by Leonard McMillan


Q: What is the set of all things that we can ever see?

A: The Plenoptic Function (Adelson & Bergen)

Let's start with a stationary person and try to parameterize everything that he can see...

# Grayscale snapshot

---

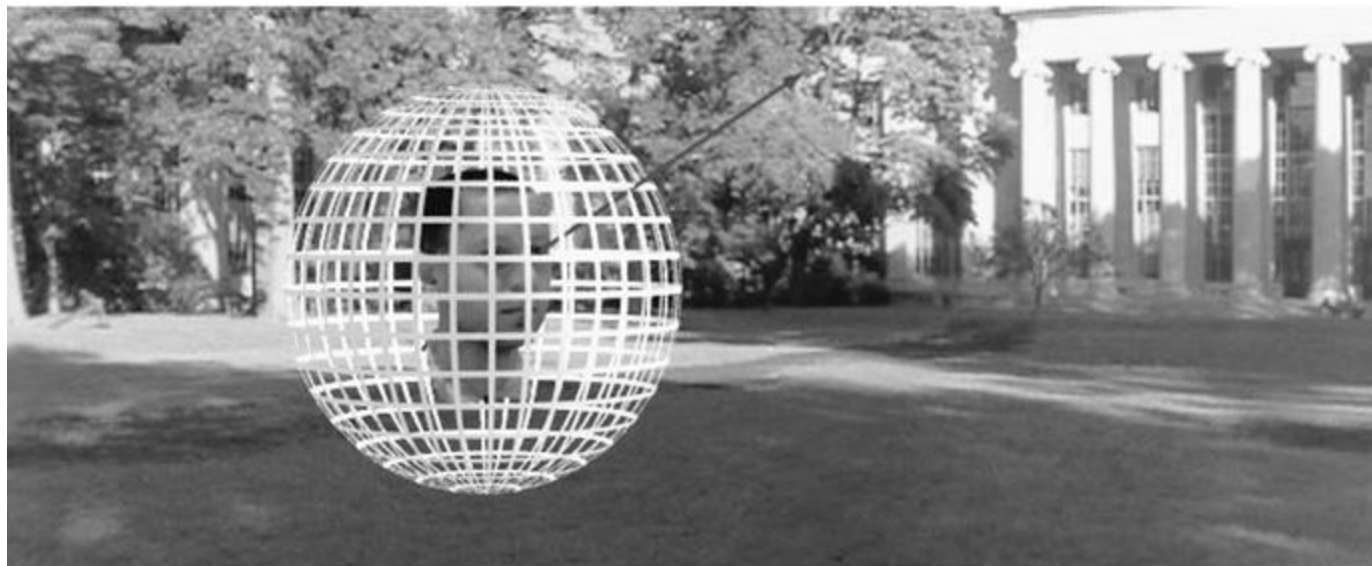

$$P(\theta, \phi)$$

is intensity of light

- Seen from a single view point
- At a single time
- Averaged over the wavelengths of the visible spectrum

(can also do  $P(x,y)$ , but spherical coordinate are nicer)

# Color snapshot

---



$$P(\theta, \phi, \lambda)$$

is intensity of light

- Seen from a single view point
- At a single time
- As a function of wavelength



# A movie

---




$$P(\theta, \phi, \lambda, t)$$

is intensity of light

- Seen from a single view point
- Over time
- As a function of wavelength

# Holographic movie

---

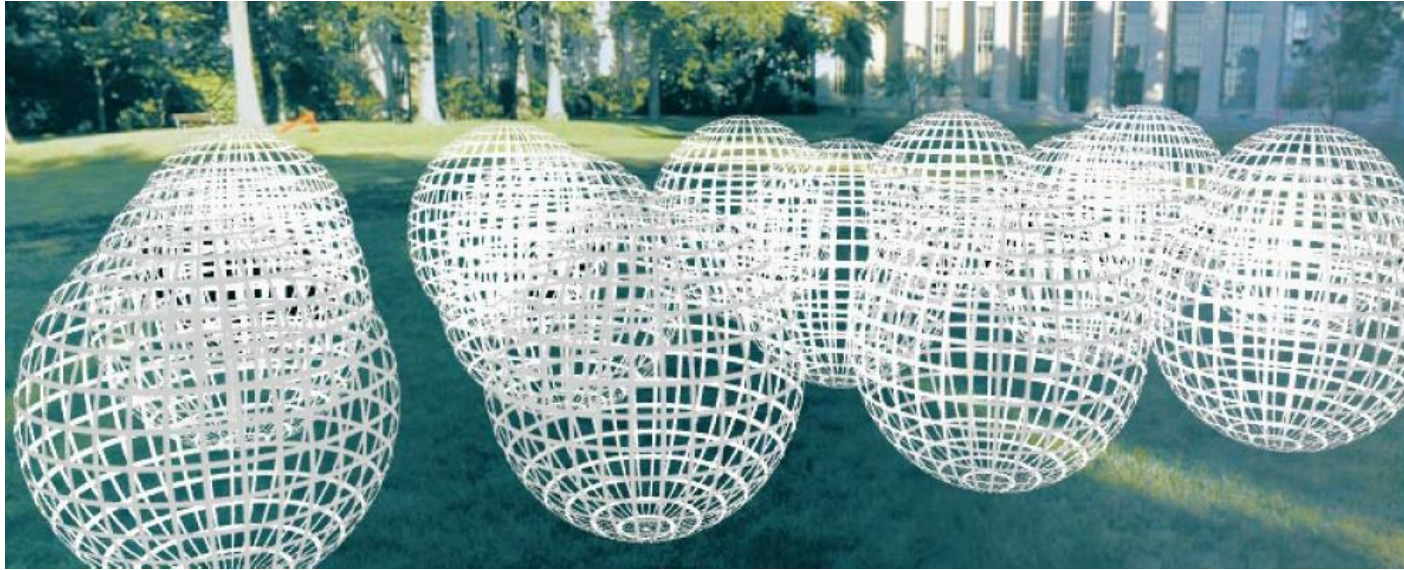


$$P(\theta, \phi, \lambda, t, V_x, V_y, V_z)$$

is intensity of light

- Seen from ANY viewpoint
- Over time
- As a function of wavelength

# The Plenoptic Function

---

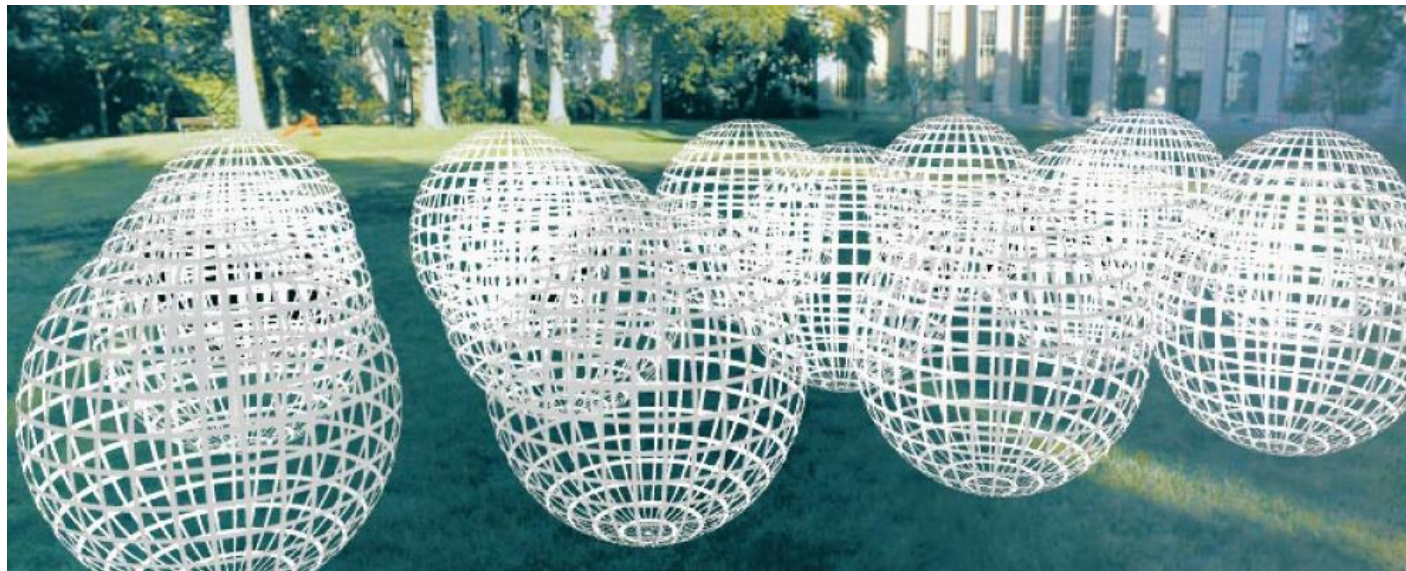

$$P(\theta, \phi, \lambda, t, V_x, V_y, V_z)$$


- Can reconstruct every possible view, at every moment, from every position, at every wavelength
- Contains every photograph, every movie, everything that anyone has ever seen!

# Representing light

The atomic element of light: ~~a pixel~~ **a ray**

# Fundamental limitations and trade-offs

- Only so much light in a given area to capture
- Basic sensor accumulates light at a set of positions from all orientations, over all time
- We want **intensity** of light at a **given time** at **one position** for a **set of orientations**
- Solutions:
  - funnel, constrain, redirect light
  - change the sensor

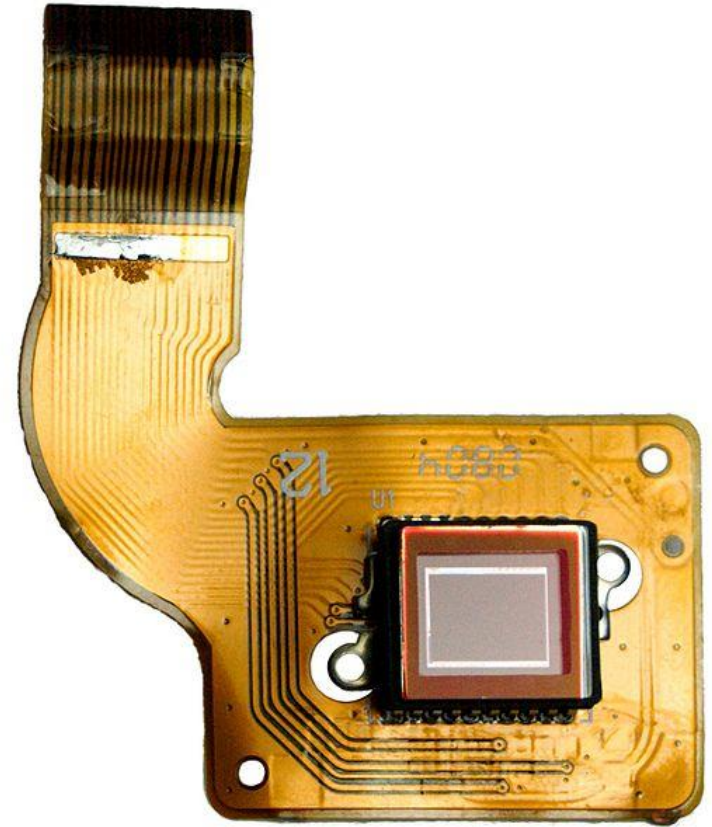

CCD inside camera



# Trade-offs of conventional camera

- Add a pinhole
  - ✓ Pixels correspond to small range of orientations at the camera center, instead of all gathered light at one position
  - ✗ Much less light hits sensor
- Add a lens
  - ✓ More light hits sensor
  - ✗ Limited depth of field
  - ✗ Chromatic aberration
- Add a shutter
  - Capture average intensity at a particular range of times
- Increase sensor resolution
  - ✓ Each pixel represents a smaller range of orientations
  - ✗ Less light per pixel
- Controls: aperture size, focal length, shutter time

How else can we design cameras?

What do they sacrifice/gain?



# 1. Light Field Photography with “Plenoptic Camera”

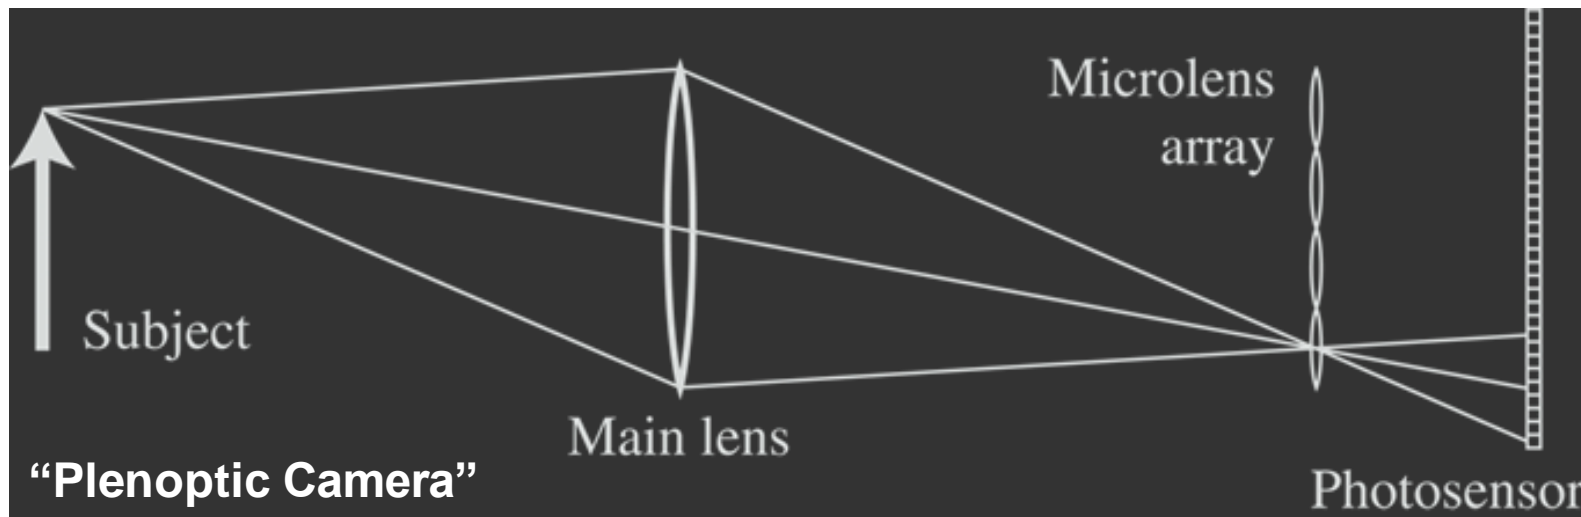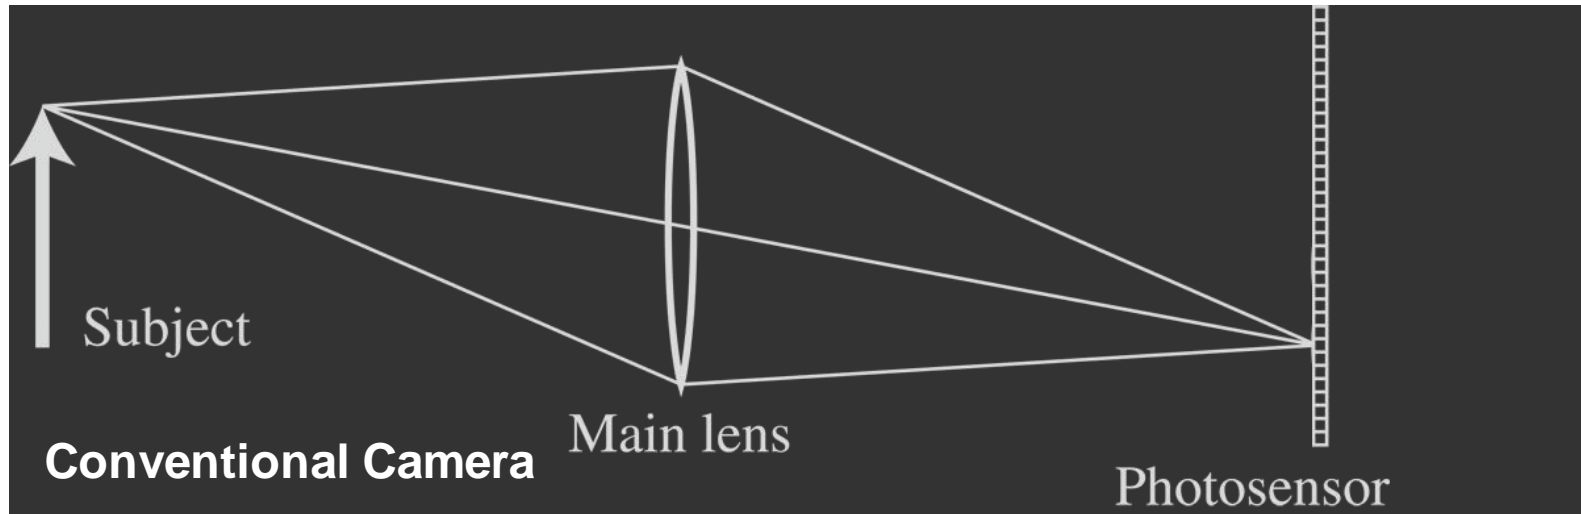



# Light field photography

- Like replacing the human retina with an insect compound eye
- Records where light ray hits the lens

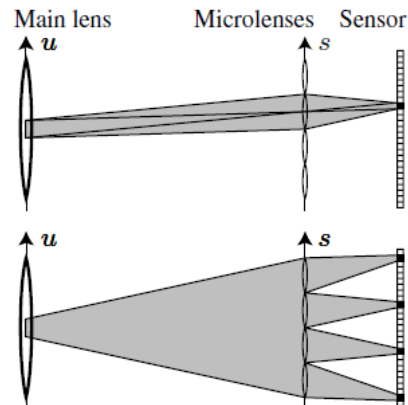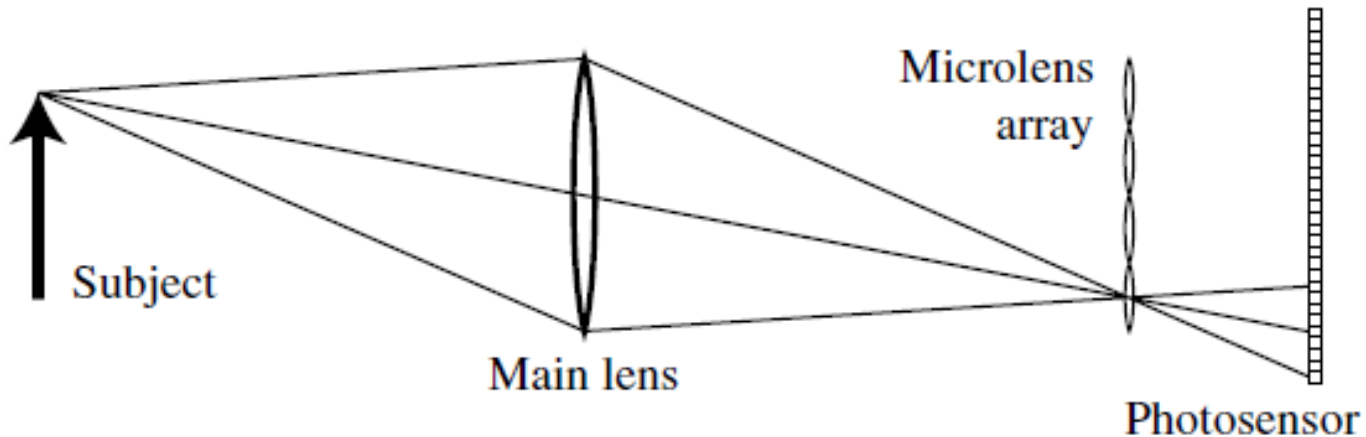


# Stanford Plenoptic Camera [Ng et al 2005]




Contax medium format camera



Kodak 16-megapixel sensor

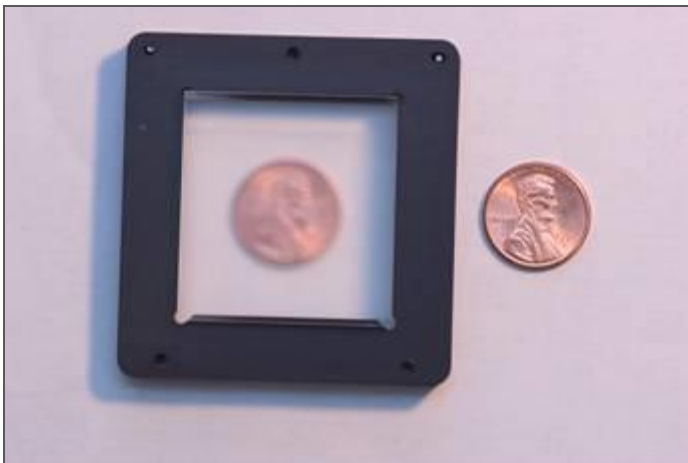


Adaptive Optics microlens array

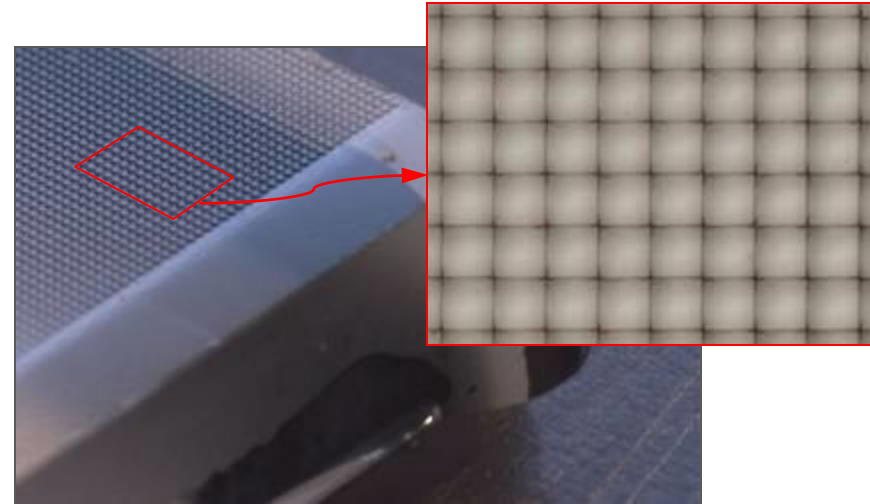


125μ square-sided microlenses

$$4000 \times 4000 \text{ pixels} \div 292 \times 292 \text{ lenses} = 14 \times 14 \text{ pixels per lens}$$



# Light field photography: applications

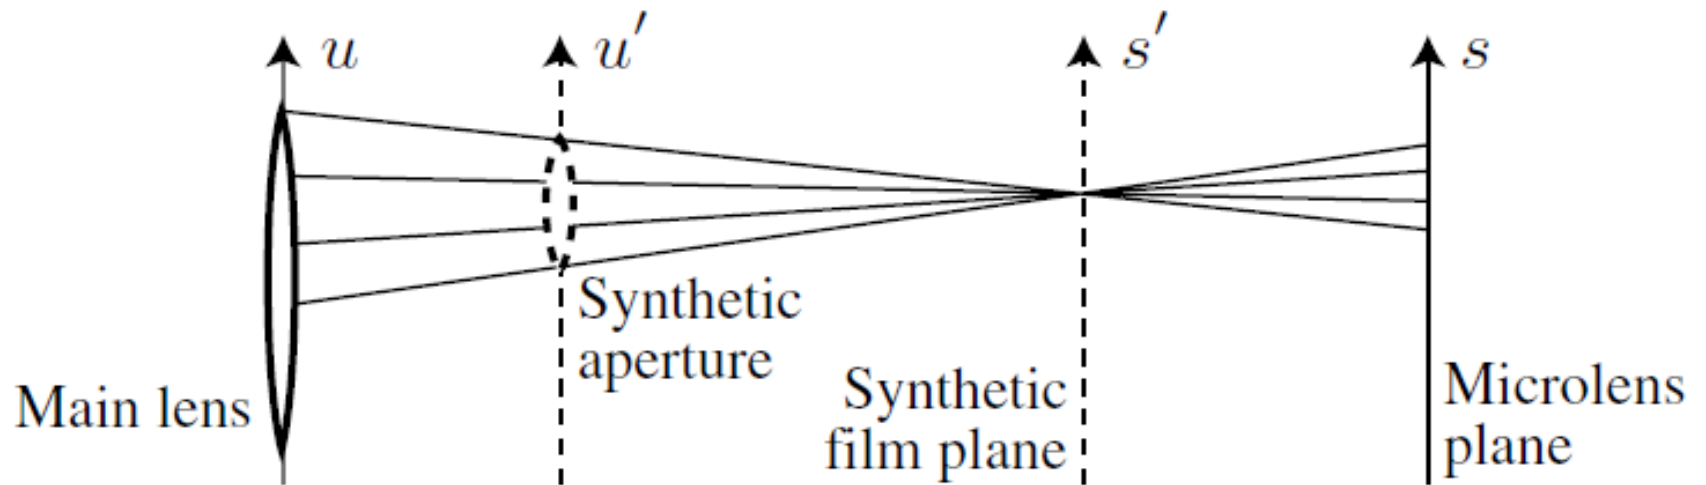

# Light field photography: applications

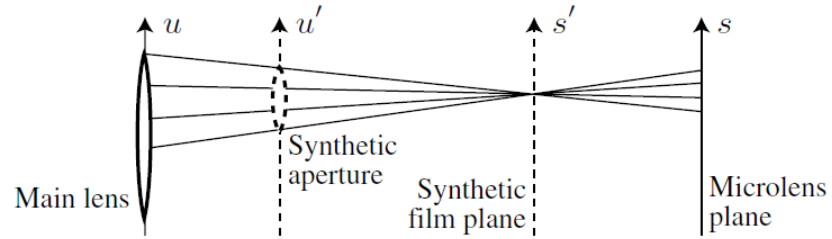

Change in  
viewpoint

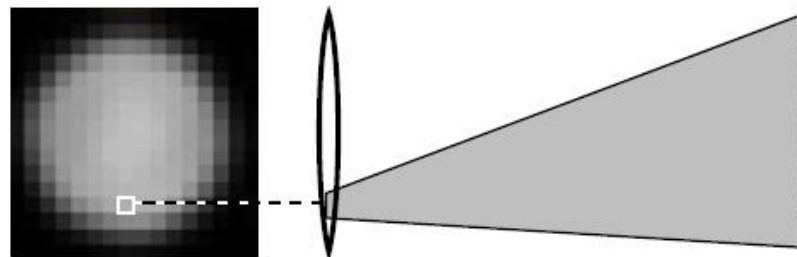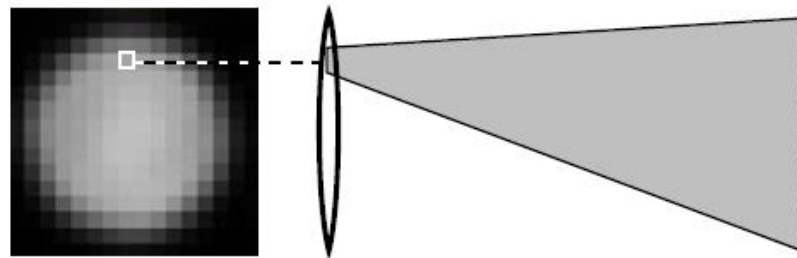

# Light field photography: applications

## Change in viewpoint

Lateral



Along Optical Axis



# Digital Refocusing



# Light field photography w/ microlenses

- We gain
  - Ability to refocus or increase depth of field
  - Ability for small viewpoint shifts
- What do we lose (vs. conventional camera)?

## 2. Coded apertures




# **Image and Depth from a Conventional Camera with a Coded Aperture**

**Anat Levin, Rob Fergus,  
Frédo Durand, William Freeman**


**MIT CSAIL**

## Output #1: Depth map

Single input image:

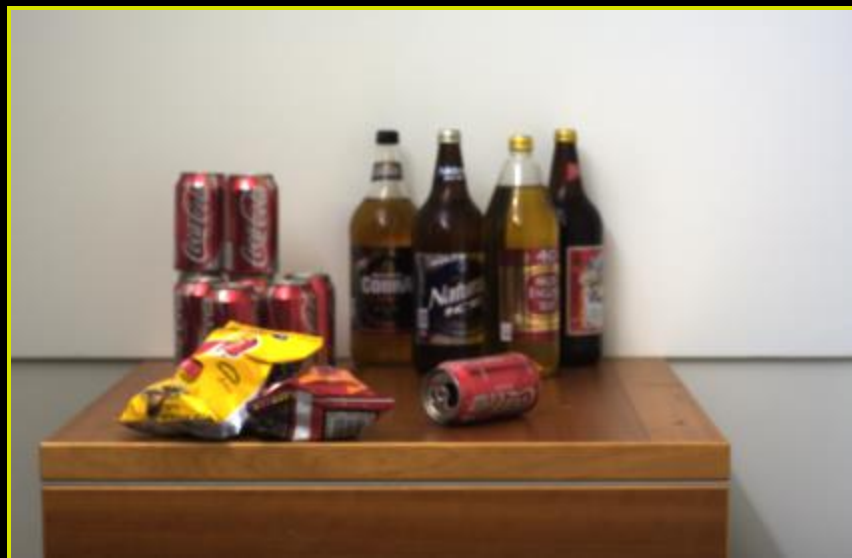


**Single input image:**

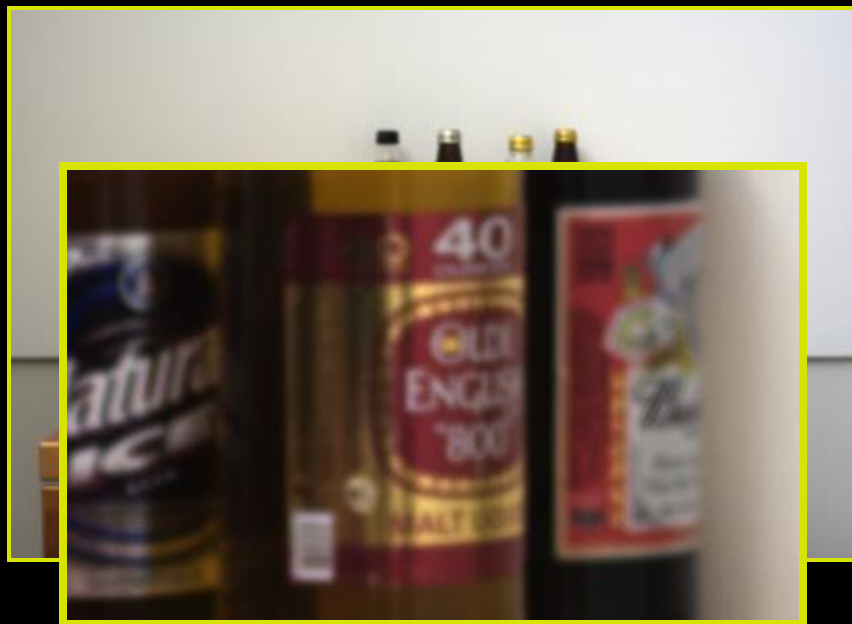

**Output #1: Depth map**



**Output #2: All-focused image**

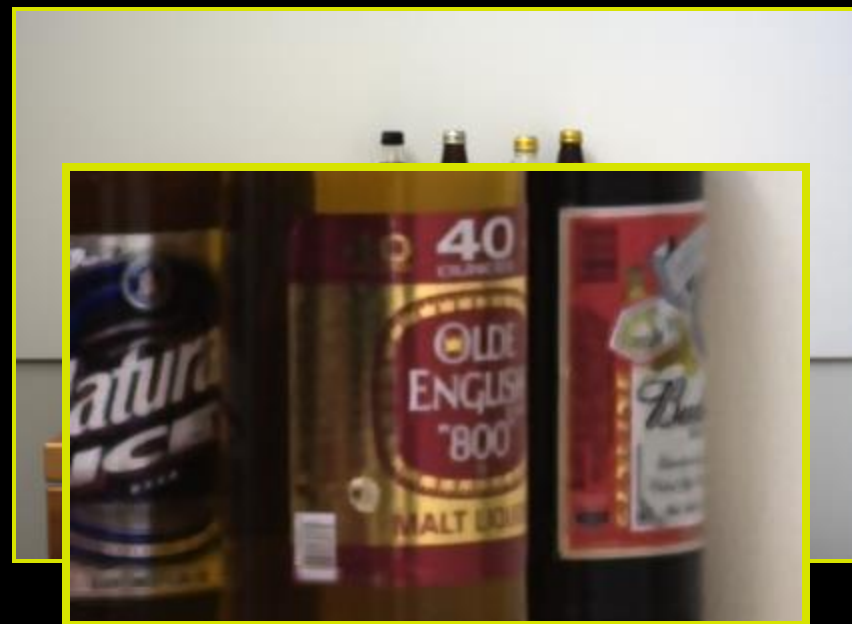

# Lens and defocus

Lens' aperture





Image of a point light source

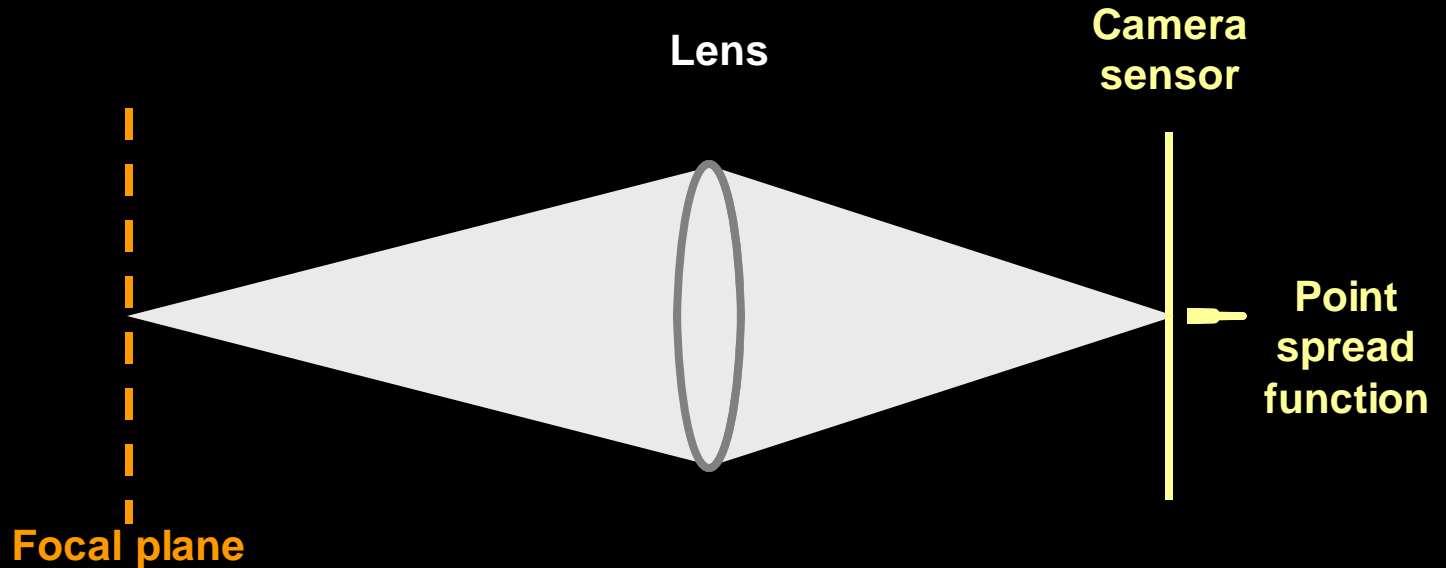

# Lens and defocus

Lens' aperture


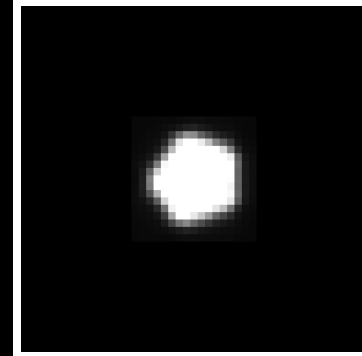


Image of a defocused point light source

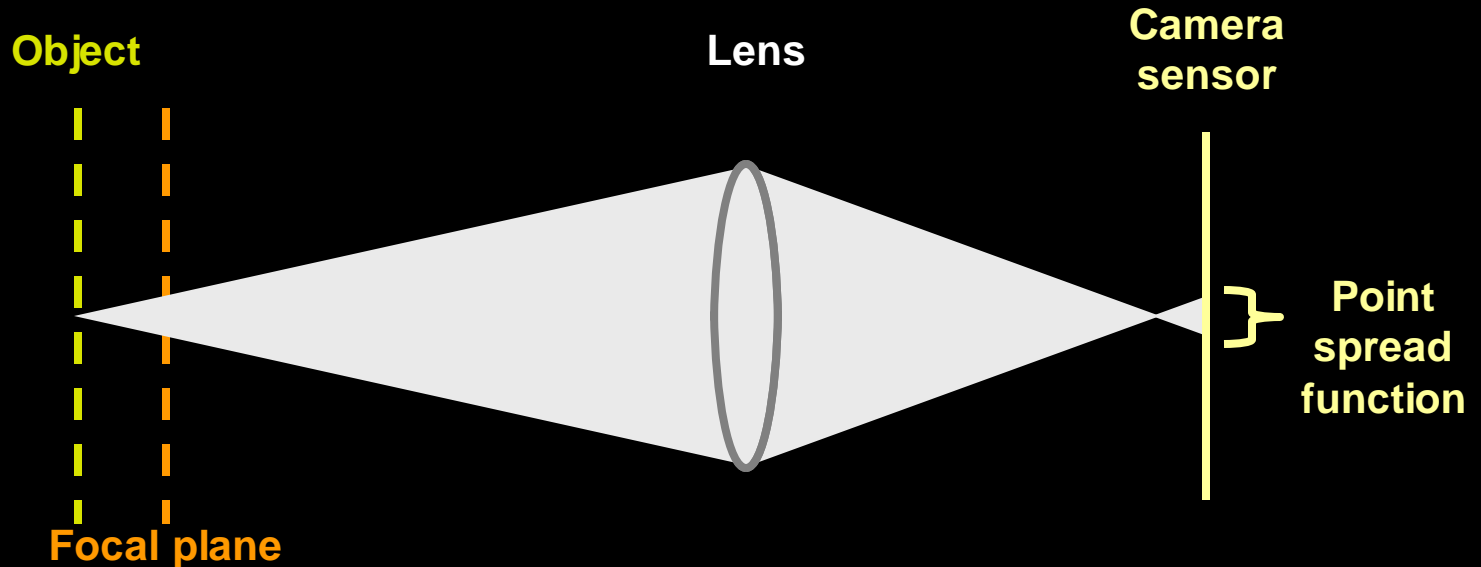

# Lens and defocus

---

Lens' aperture


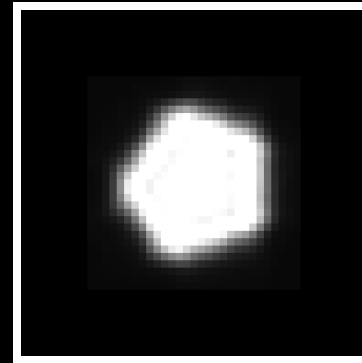


Image of a defocused point light source

Object

Lens

Camera sensor

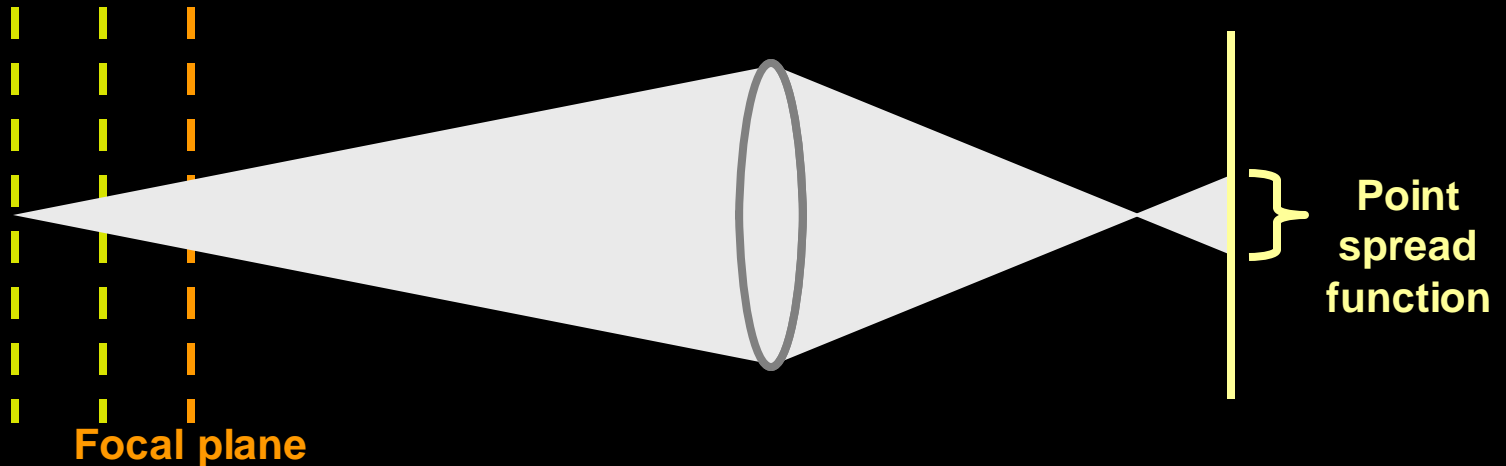

# Lens and defocus

Lens' aperture


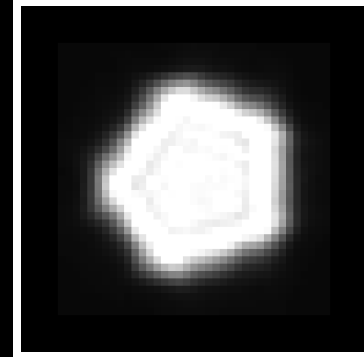


Image of a defocused point light source

Object

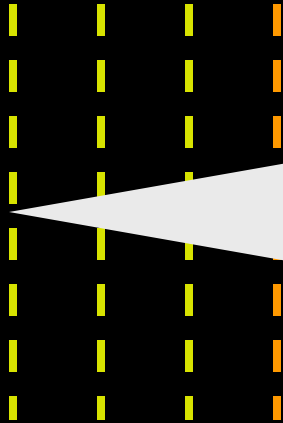

Focal plane


Lens



Camera sensor



Point spread function

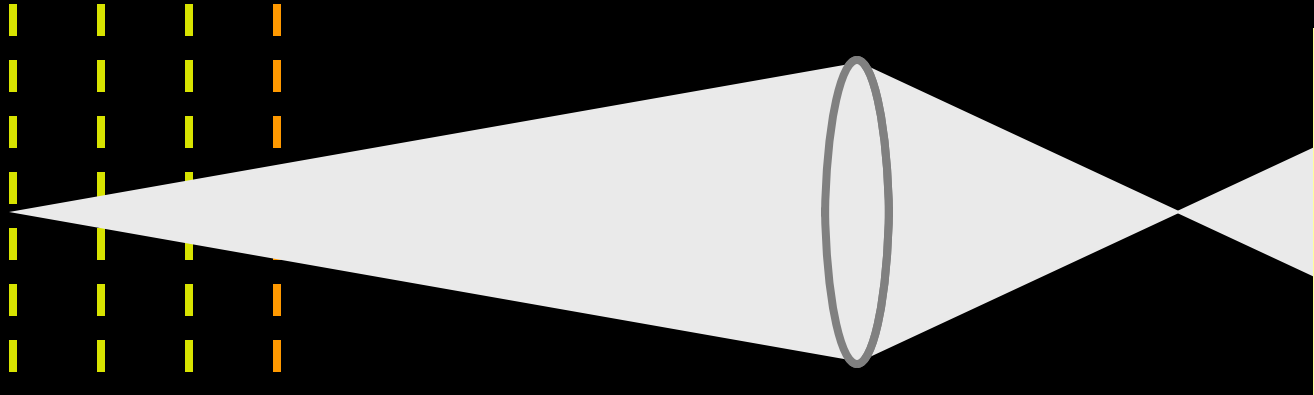

# Lens and defocus

Lens' aperture


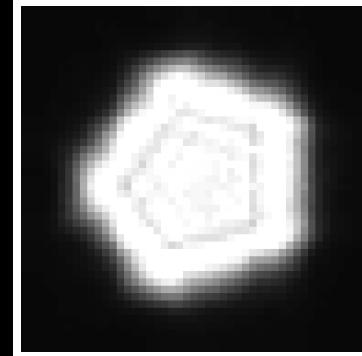


Image of a defocused point light source

Object

Lens


Camera sensor

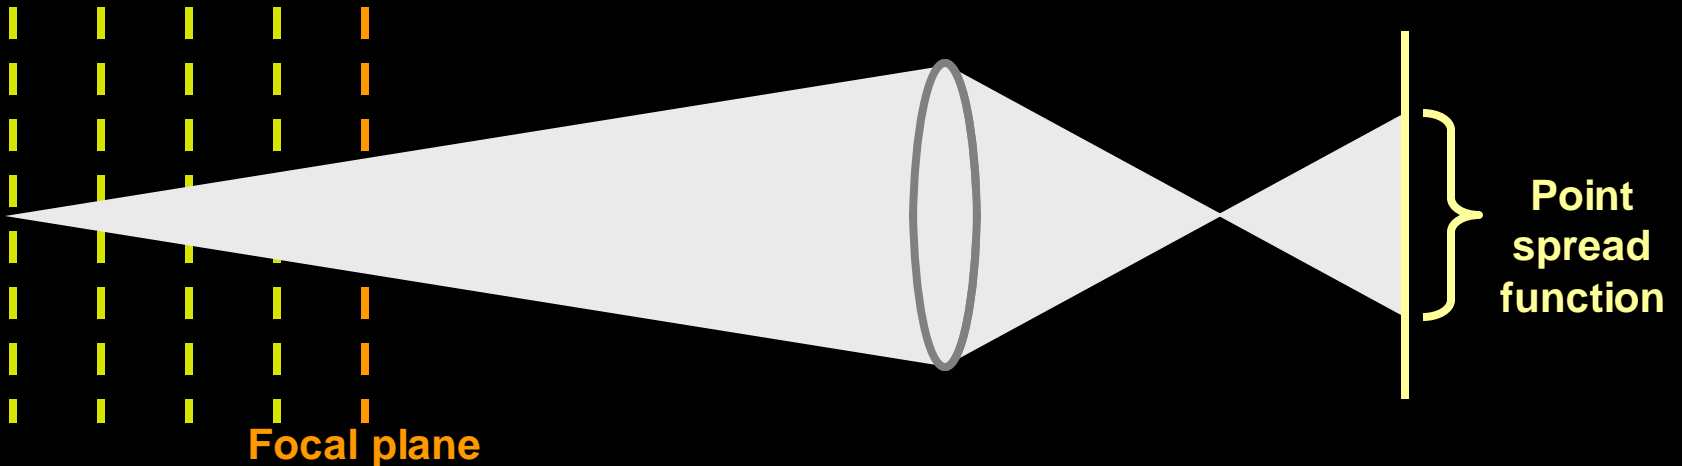



# Depth and defocus

Out of focus

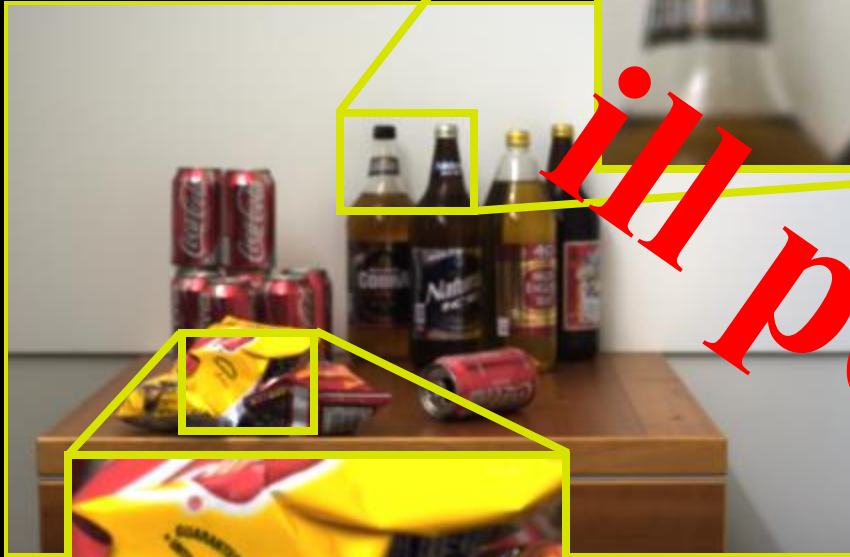

In focus



**Depth from defocus:**

Infer depth by analyzing local scale of defocus blur

*ill posed*

# Challenges

---

- Hard to discriminate a smooth scene from defocus blur

?

Out of focus



- Hard to undo defocus blur



Input



Ringing with conventional deblurring algorithm

# Key ideas

---

- **Exploit prior on natural images**

- Improve deconvolution
- Improve depth discrimination




Natural



Unnatural

- **Coded aperture (mask inside lens)**

- make defocus patterns different from natural images and easier to discriminate

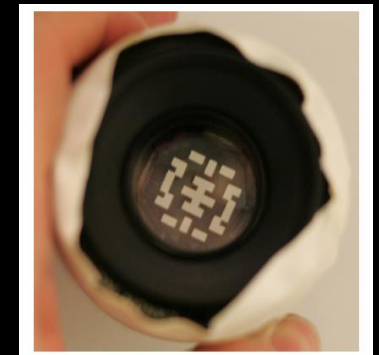

# Defocus as local convolution




$$y = f_k \otimes x$$

Local sub-window      Calibrated blur kernels at depth  $k$       Sharp sub-window


Depth  $k=1$ :



Depth  $k=2$ :

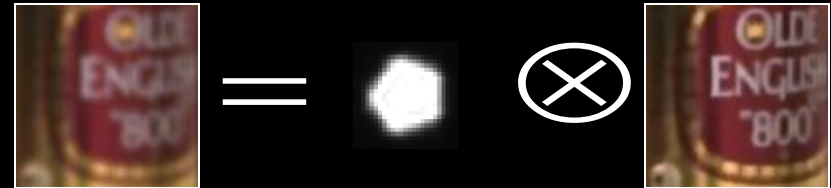


Depth  $k=3$ :

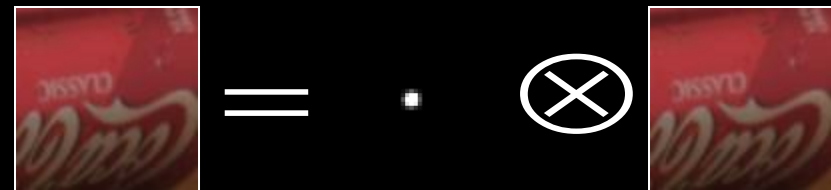

# Overview

Try deconvolving local input windows with different scaled filters:

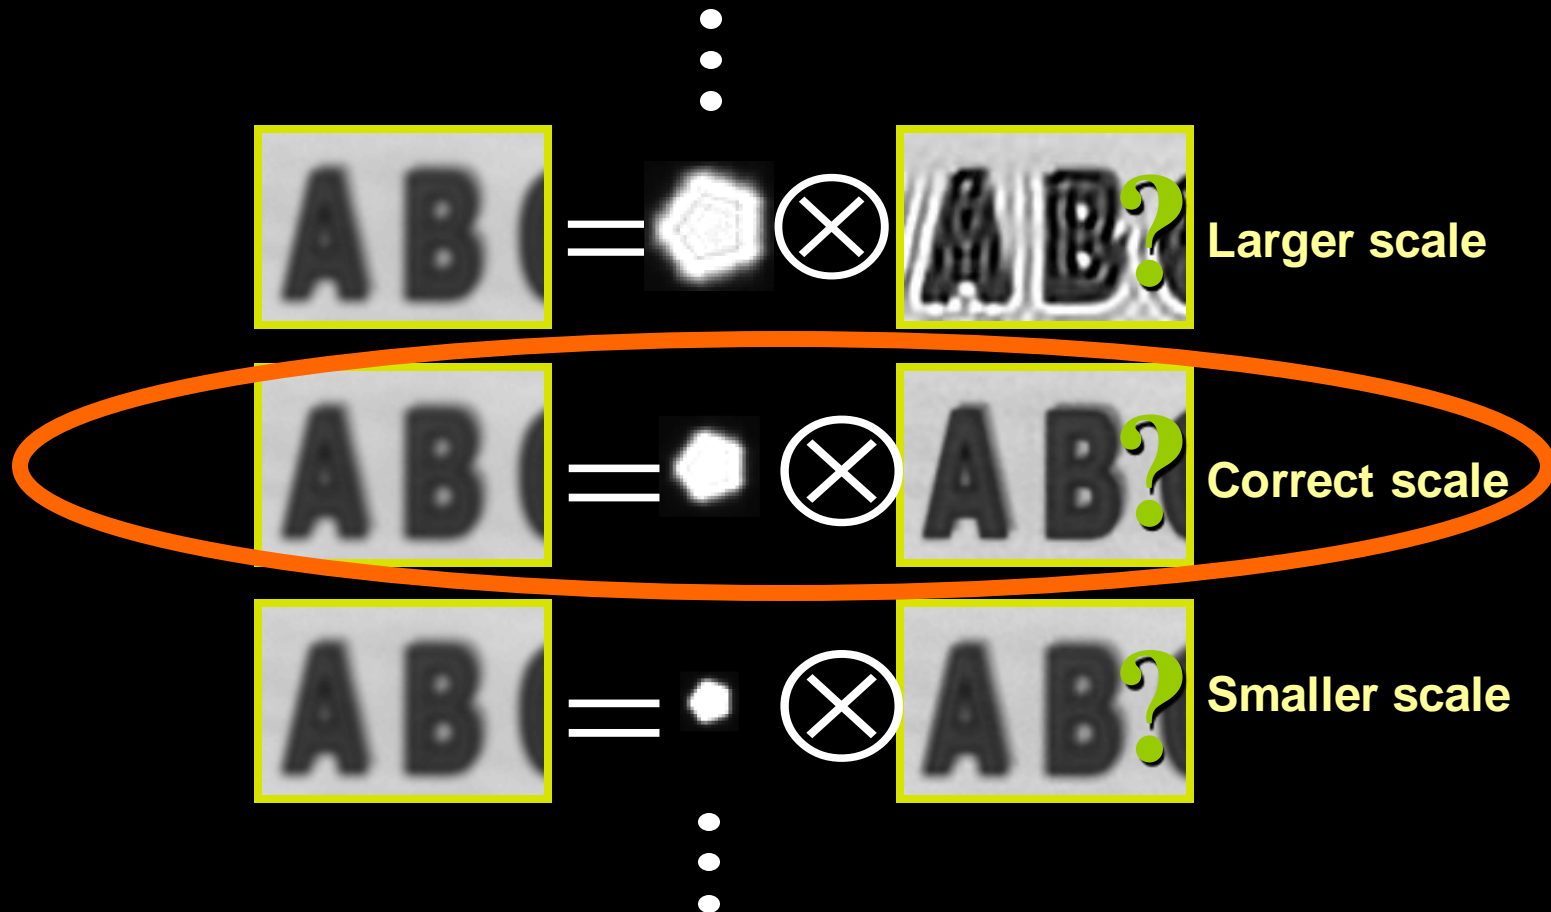

Somehow: select best scale.

# Challenges

- Hard to deconvolve even when kernel is known



Input






Ringing with the traditional Richardson-Lucy deconvolution algorithm

- Hard to identify correct scale:




=



Larger scale




=




Correct scale



=




Smaller scale

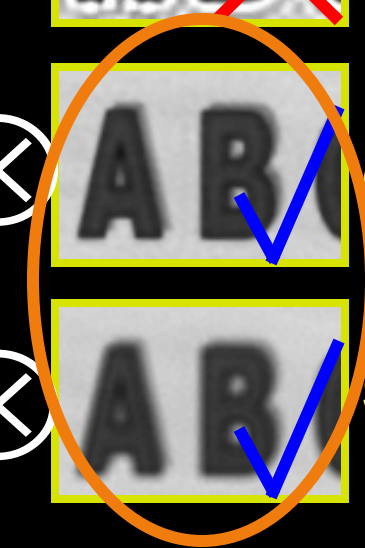

# Deconvolution is ill posed

---

$$f \otimes x = y$$

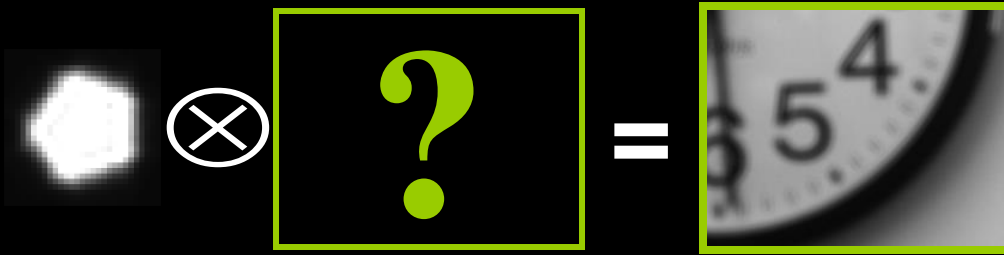


# Deconvolution is ill posed

---

$$f \otimes x = y$$

Solution 1:

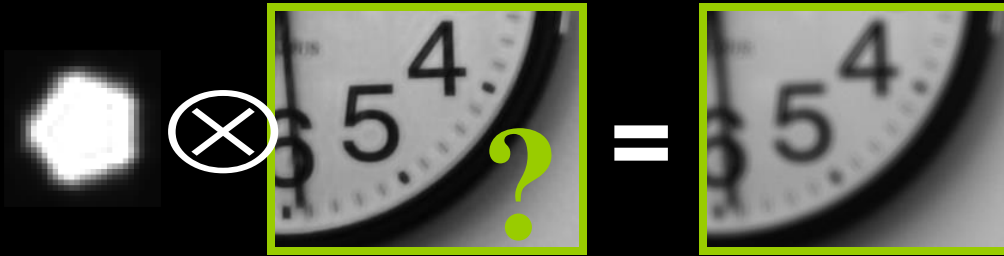

Solution 2:






# Idea 1: Natural images prior

---

## What makes images special?

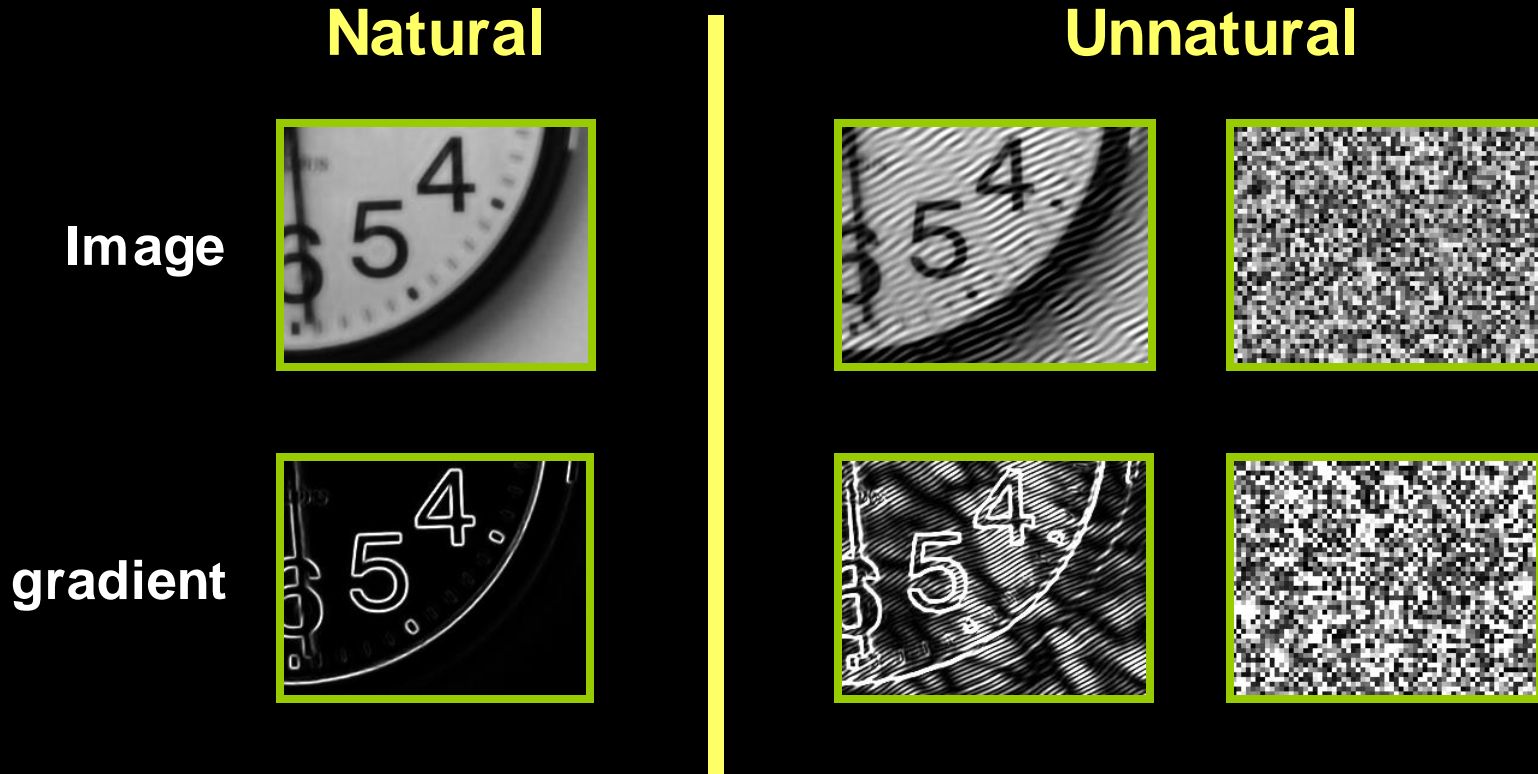


Natural images have sparse gradients

➡ put a penalty on gradients


# Deconvolution with prior

$$x = \arg \min \underbrace{|f \otimes x - y|^2}_{\text{Convolution error}} + \lambda \underbrace{\sum_i \rho(\nabla x_i)}_{\text{Derivatives prior}}$$

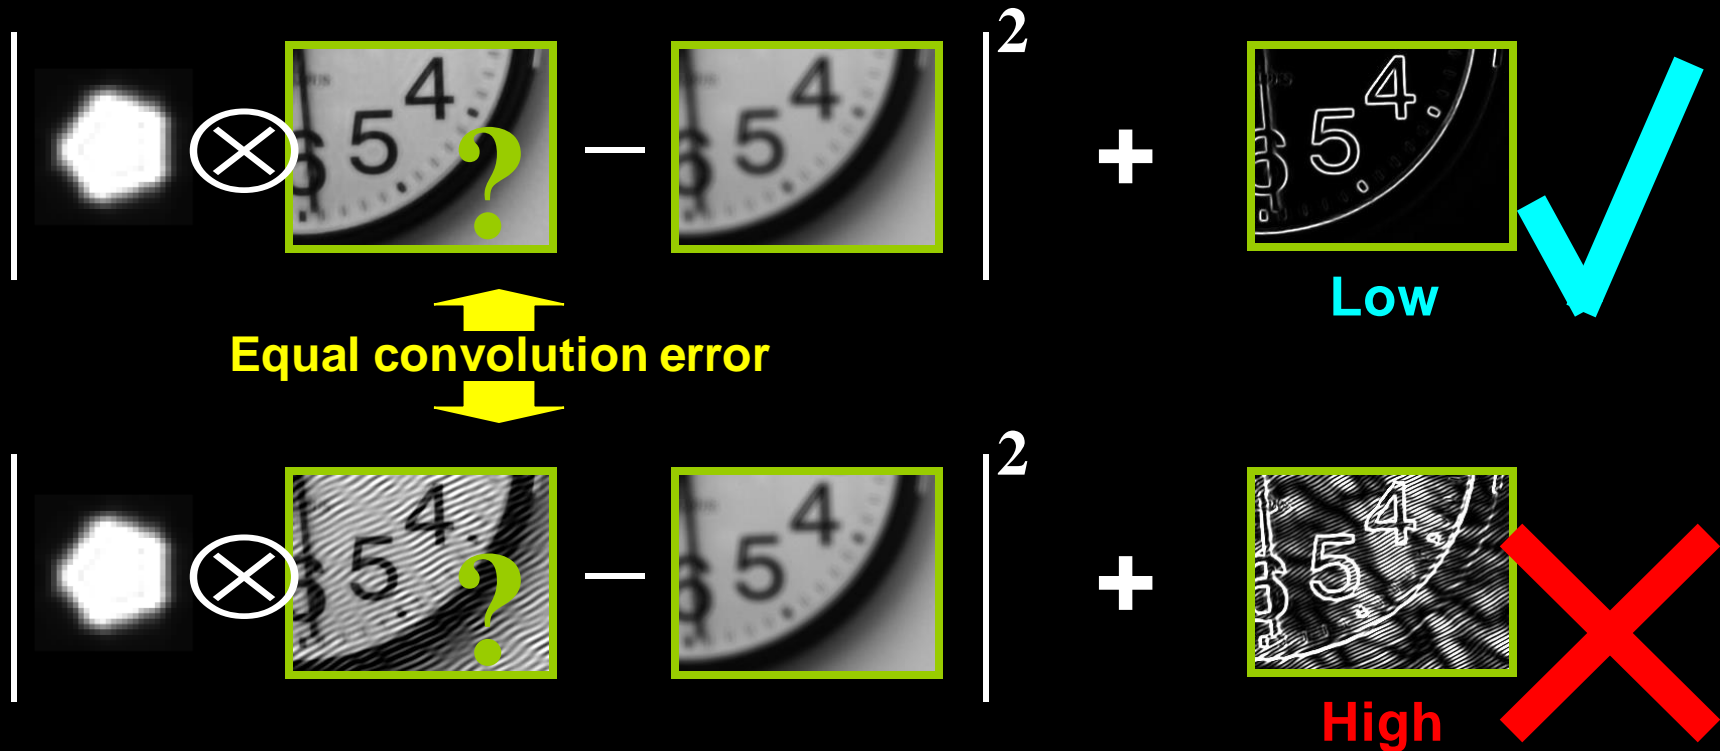

# Recall: Overview

Try deconvolving local input windows with different scaled filters:

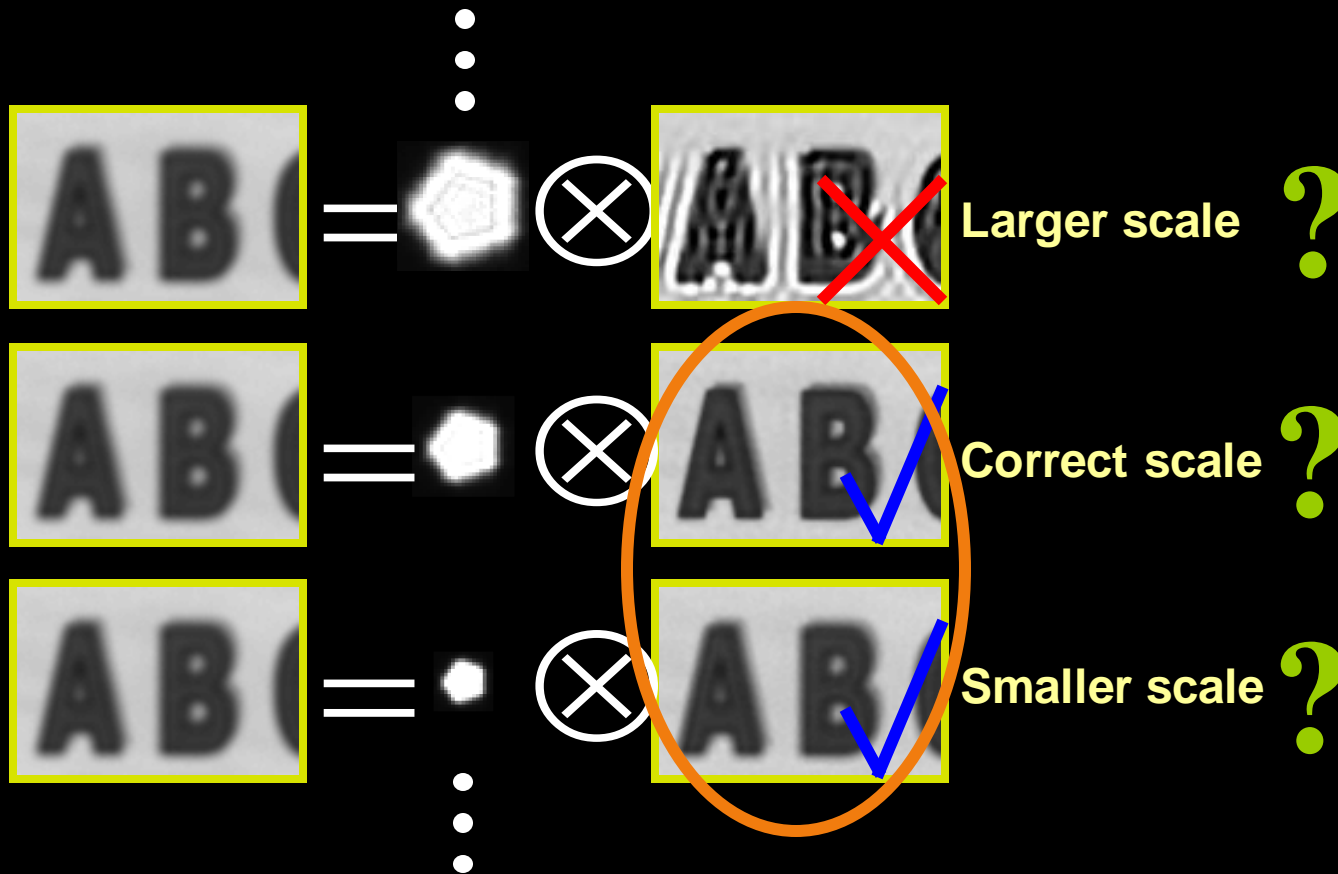

Somehow: select best scale.

Challenge: smaller scale not so different than correct


# Idea 2: Coded Aperture

---

- **Mask (code) in aperture plane**
  - make defocus patterns different from natural images and easier to discriminate




**Conventional  
aperture**

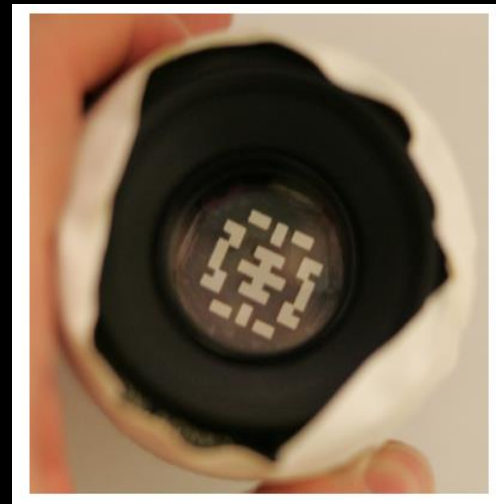

**Our coded  
aperture**

# Solution: lens with occluder

---

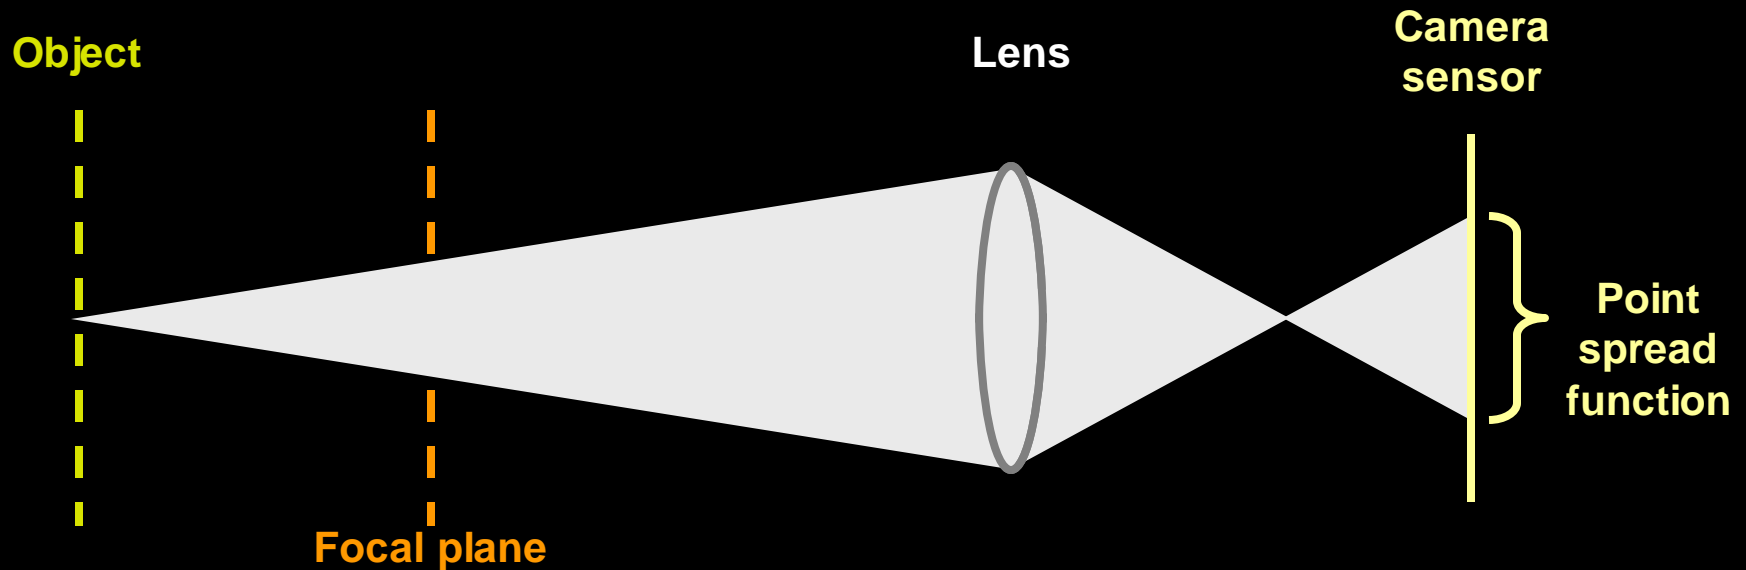

# Solution: lens with occluder

---

Aperture pattern



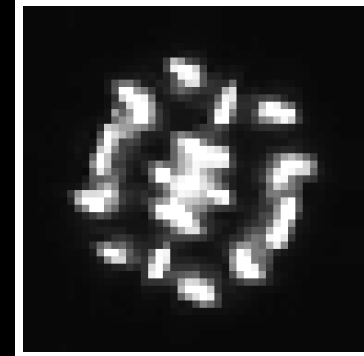


Image of a defocused point light source

Object

Lens with coded aperture

Camera sensor

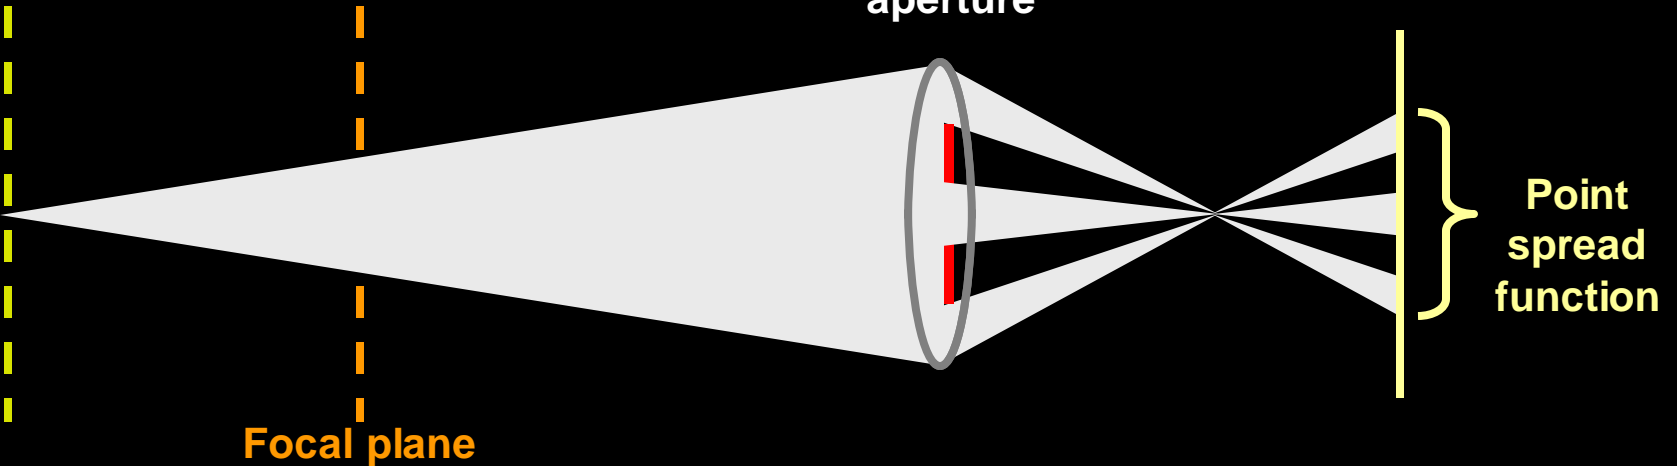

# Solution: lens with occluder

Aperture pattern



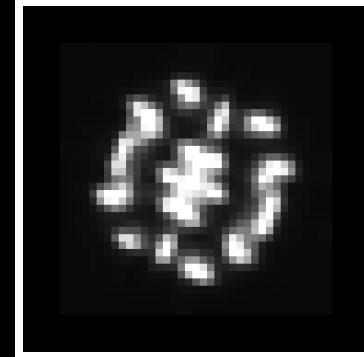


Image of a defocused point light source

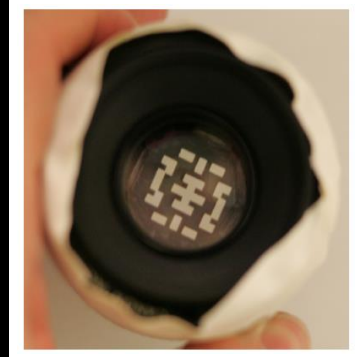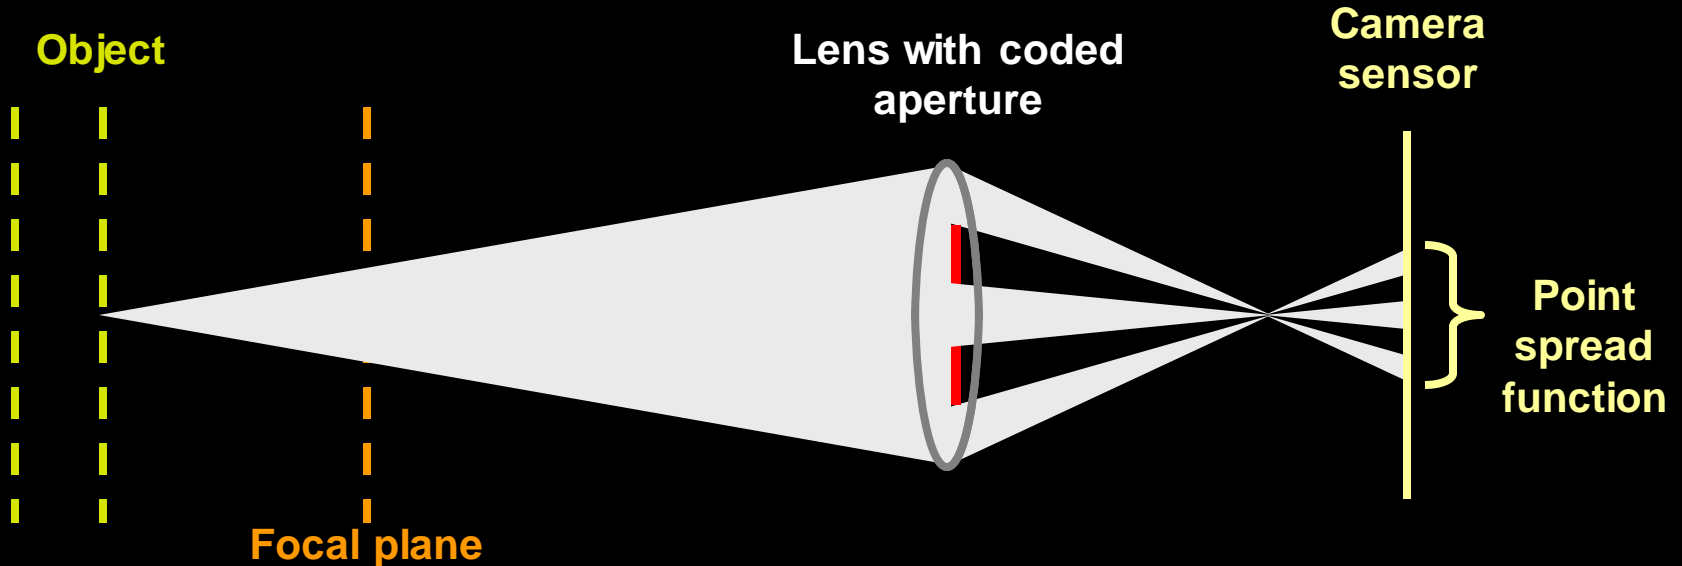

# Solution: lens with occluder

Aperture pattern



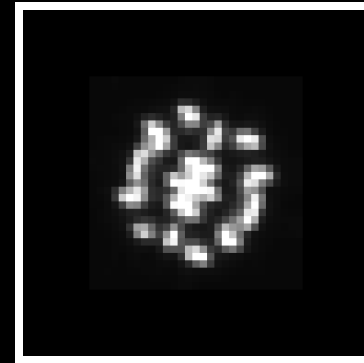


Image of a defocused point light source



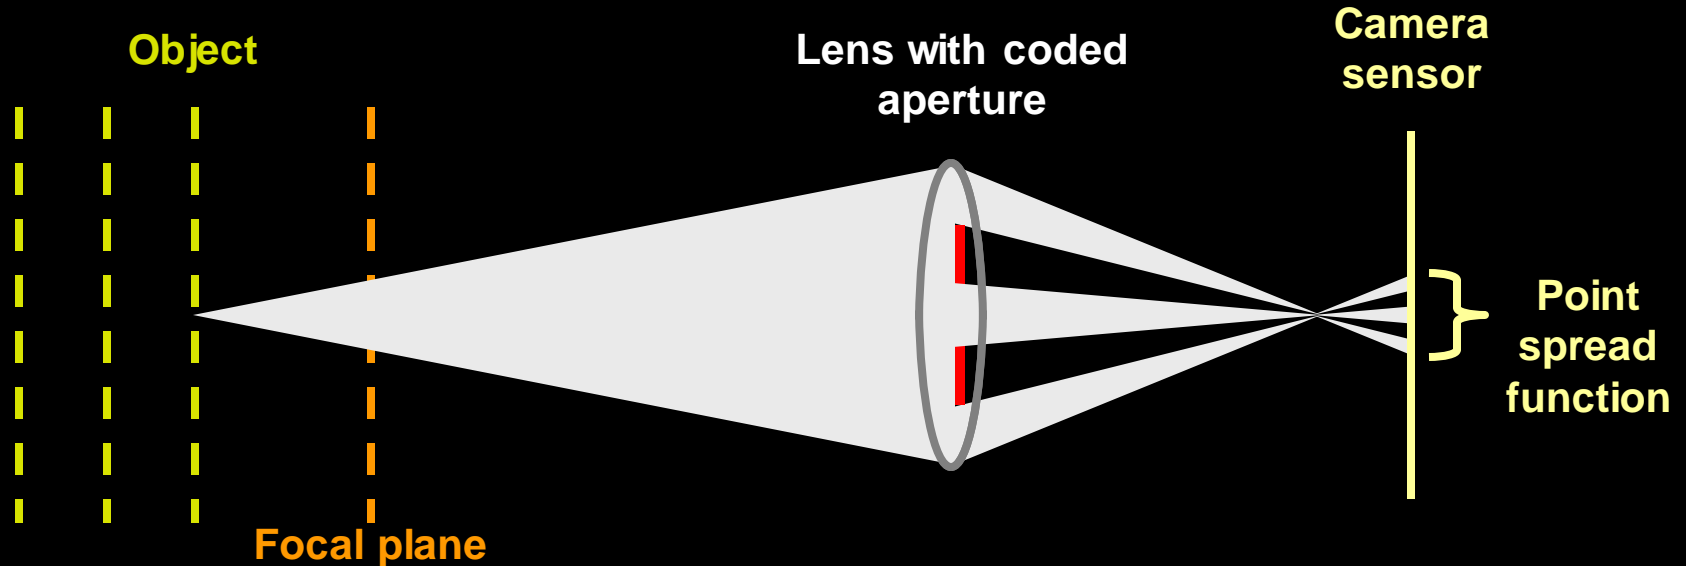

# Solution: lens with occluder

Aperture pattern



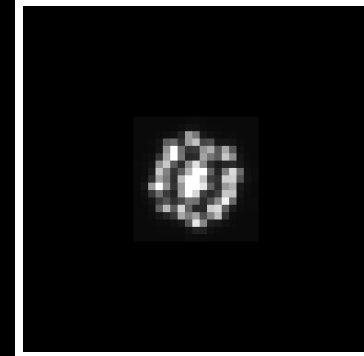


Image of a defocused point light source

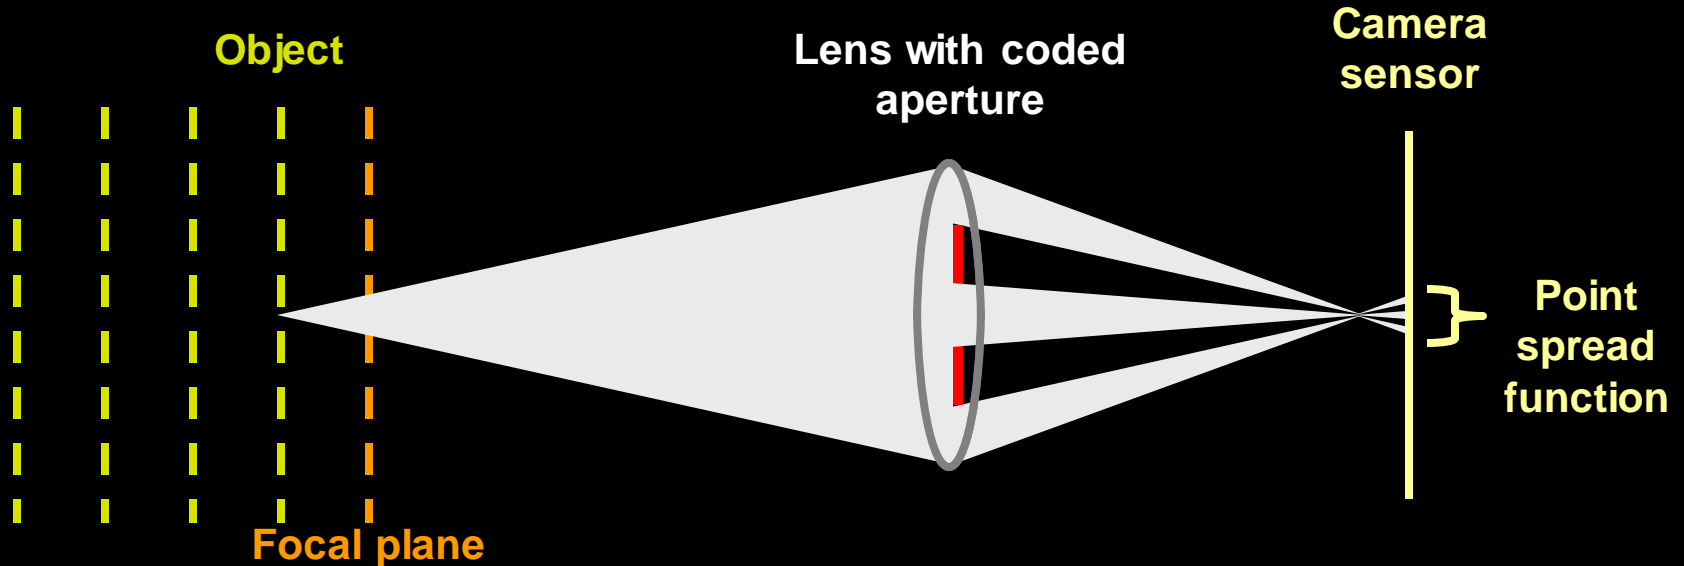

# Solution: lens with occluder

Aperture pattern






Image of a defocused point light source

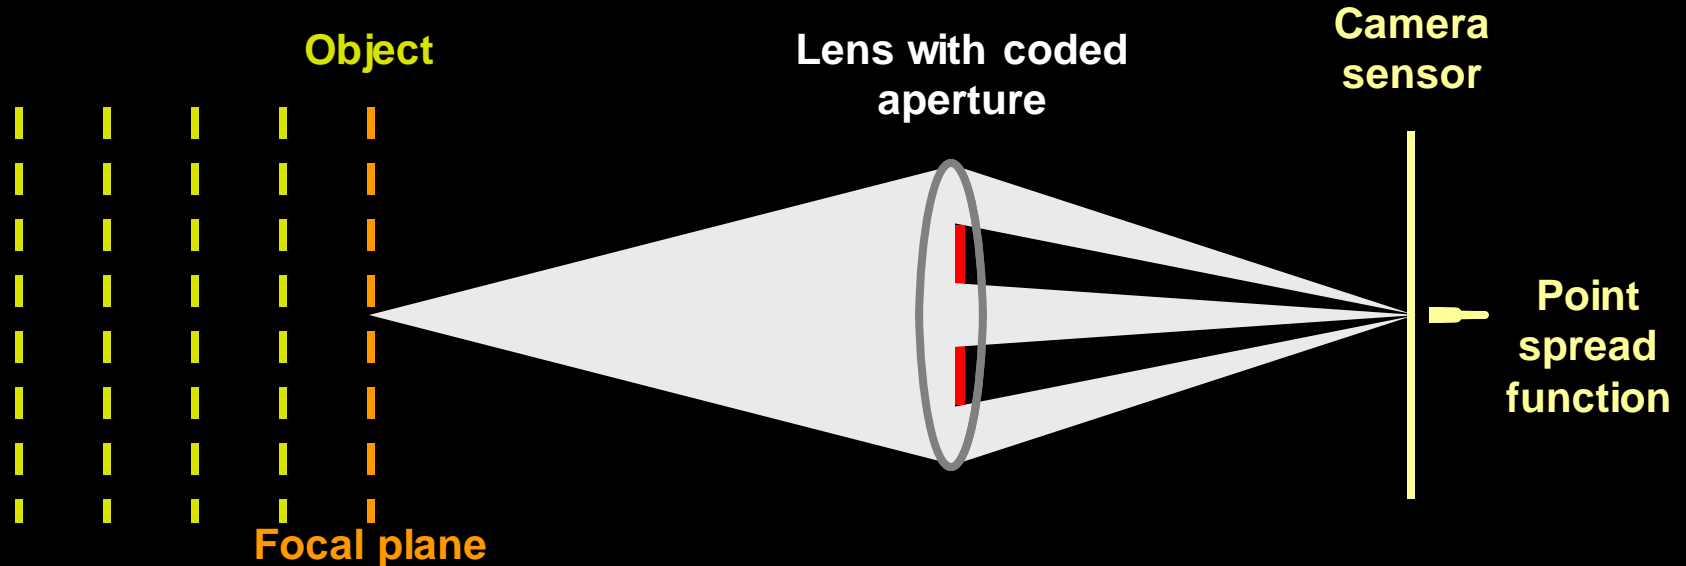




# Coded aperture reduces uncertainty in scale identification

---



**Conventional**

**Coded**

**Larger scale**

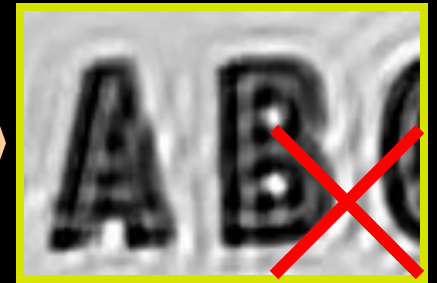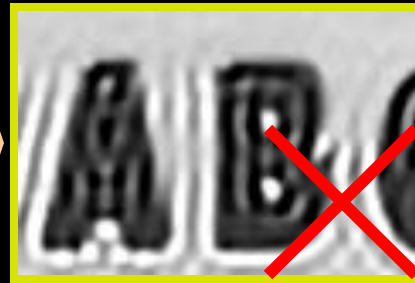


**Correct scale**

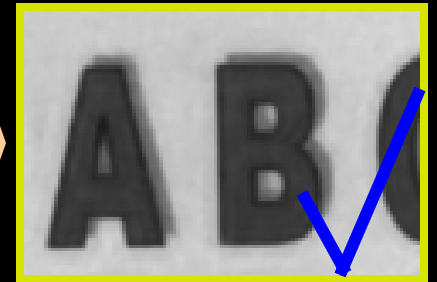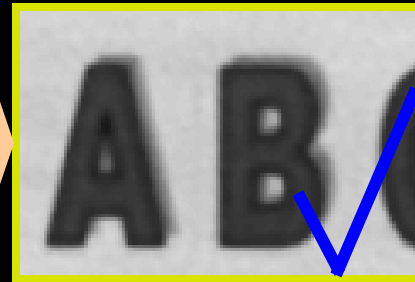

**Smaller scale**



# Convolution- frequency domain representation

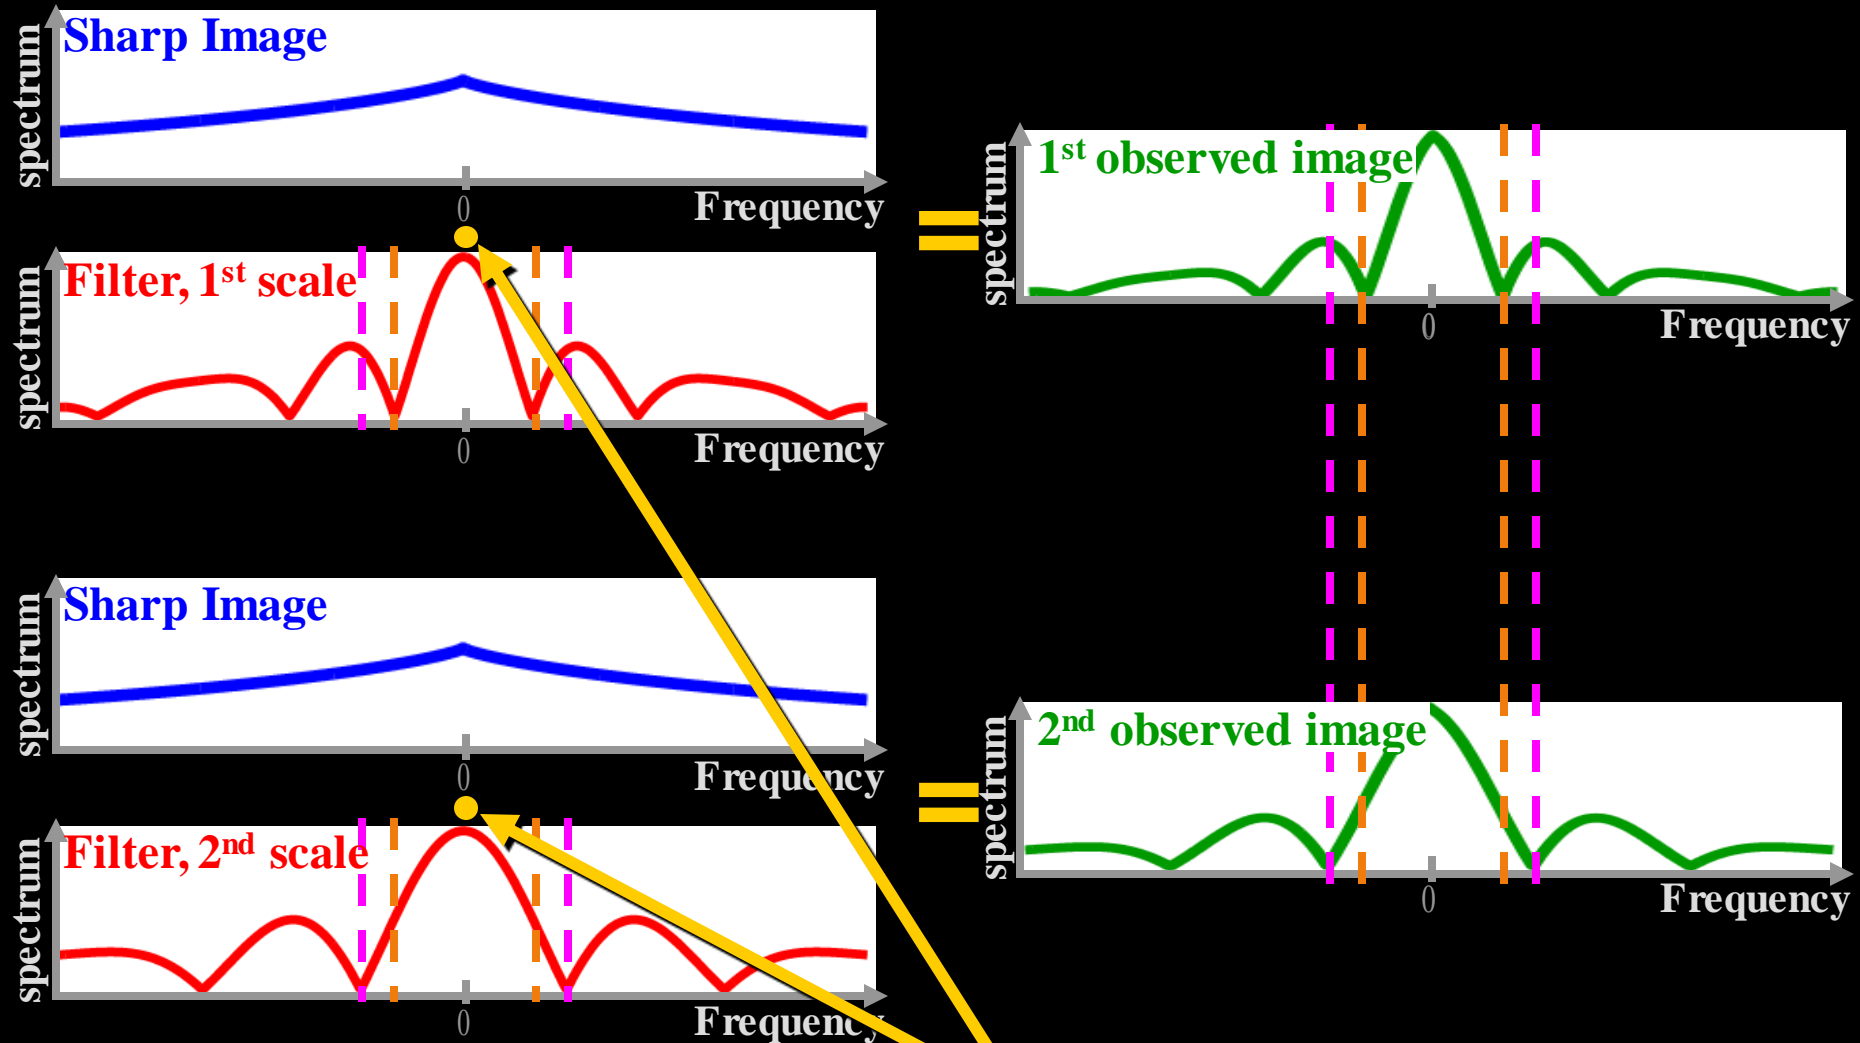


Output spectrum has zeros


Spatial convolution  $\iff$  frequency multiplication

where filter spectrum has zeros

# Coded aperture: Scale estimation and division by zero

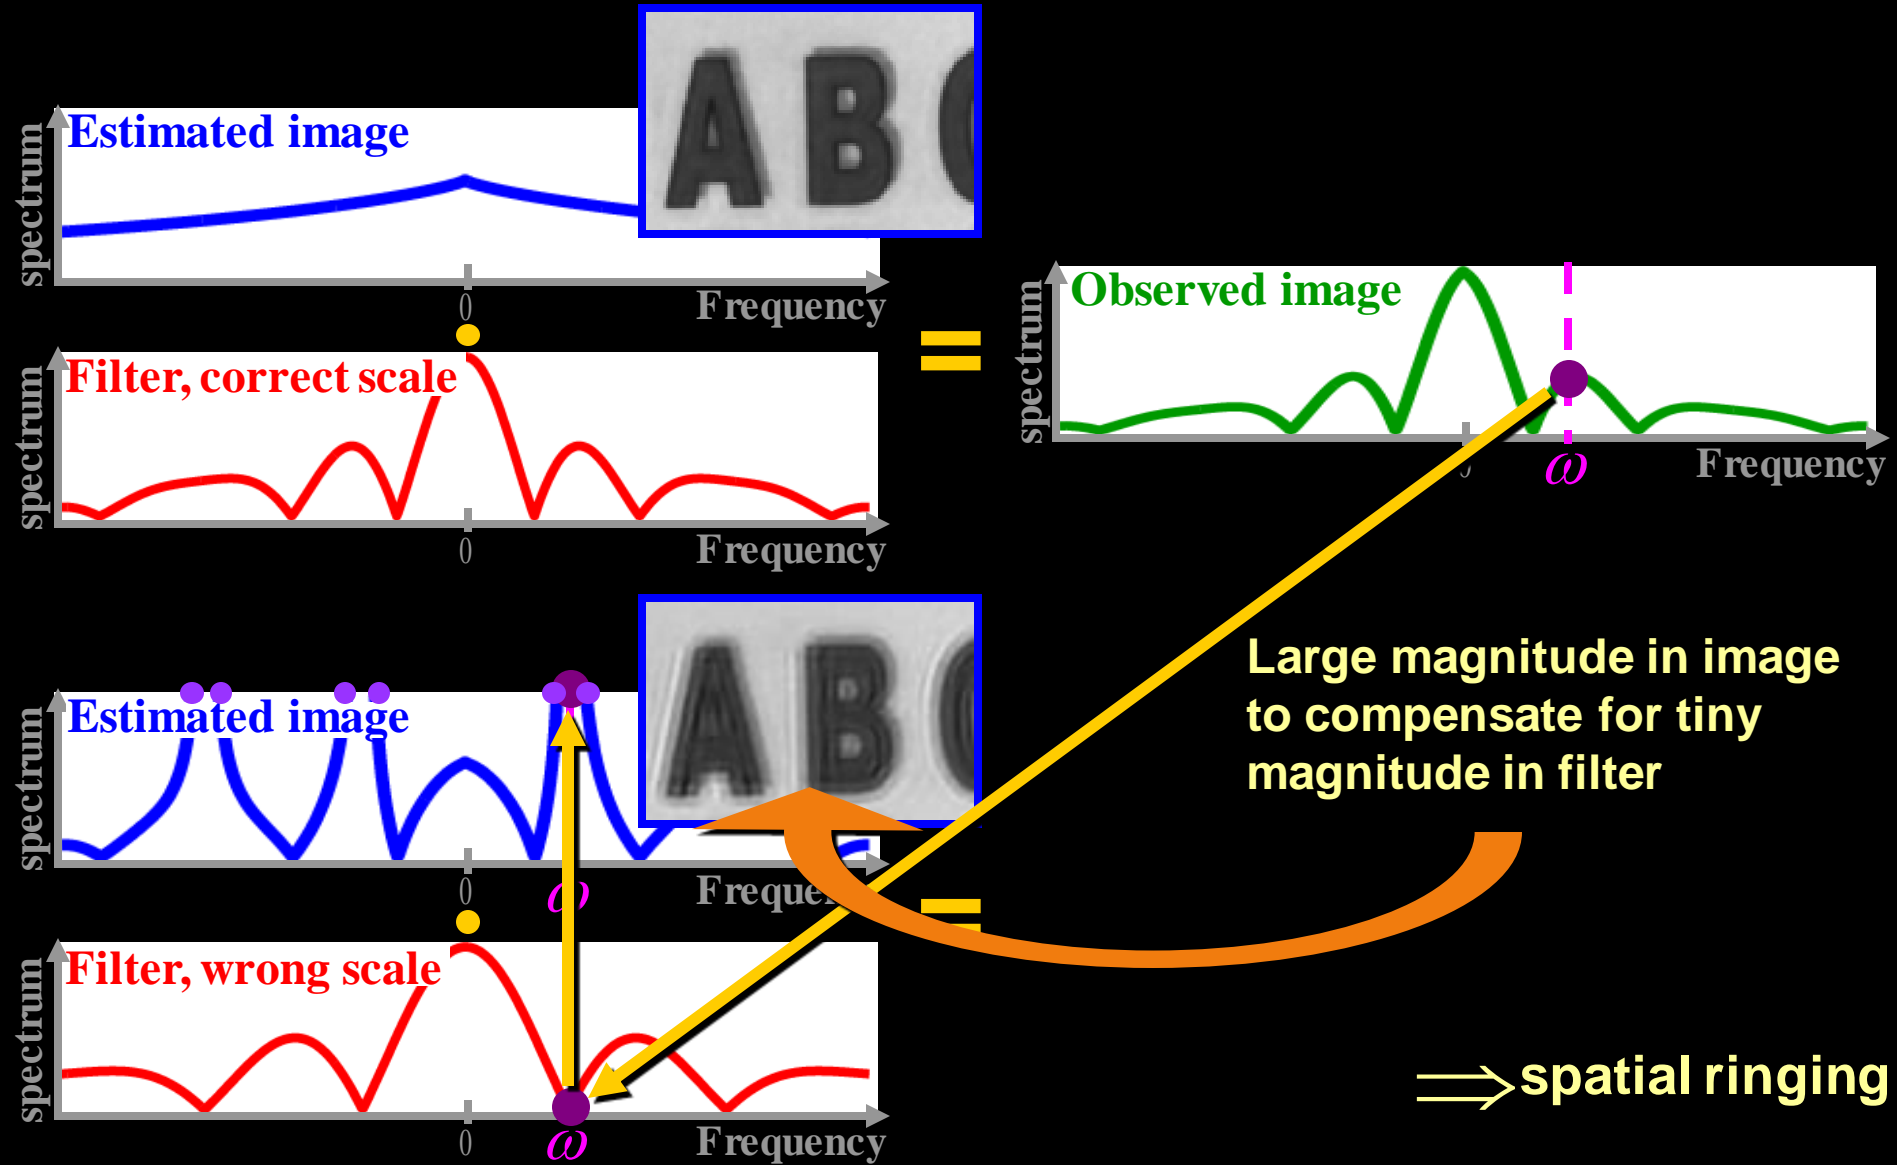


# Division by zero with a conventional aperture?

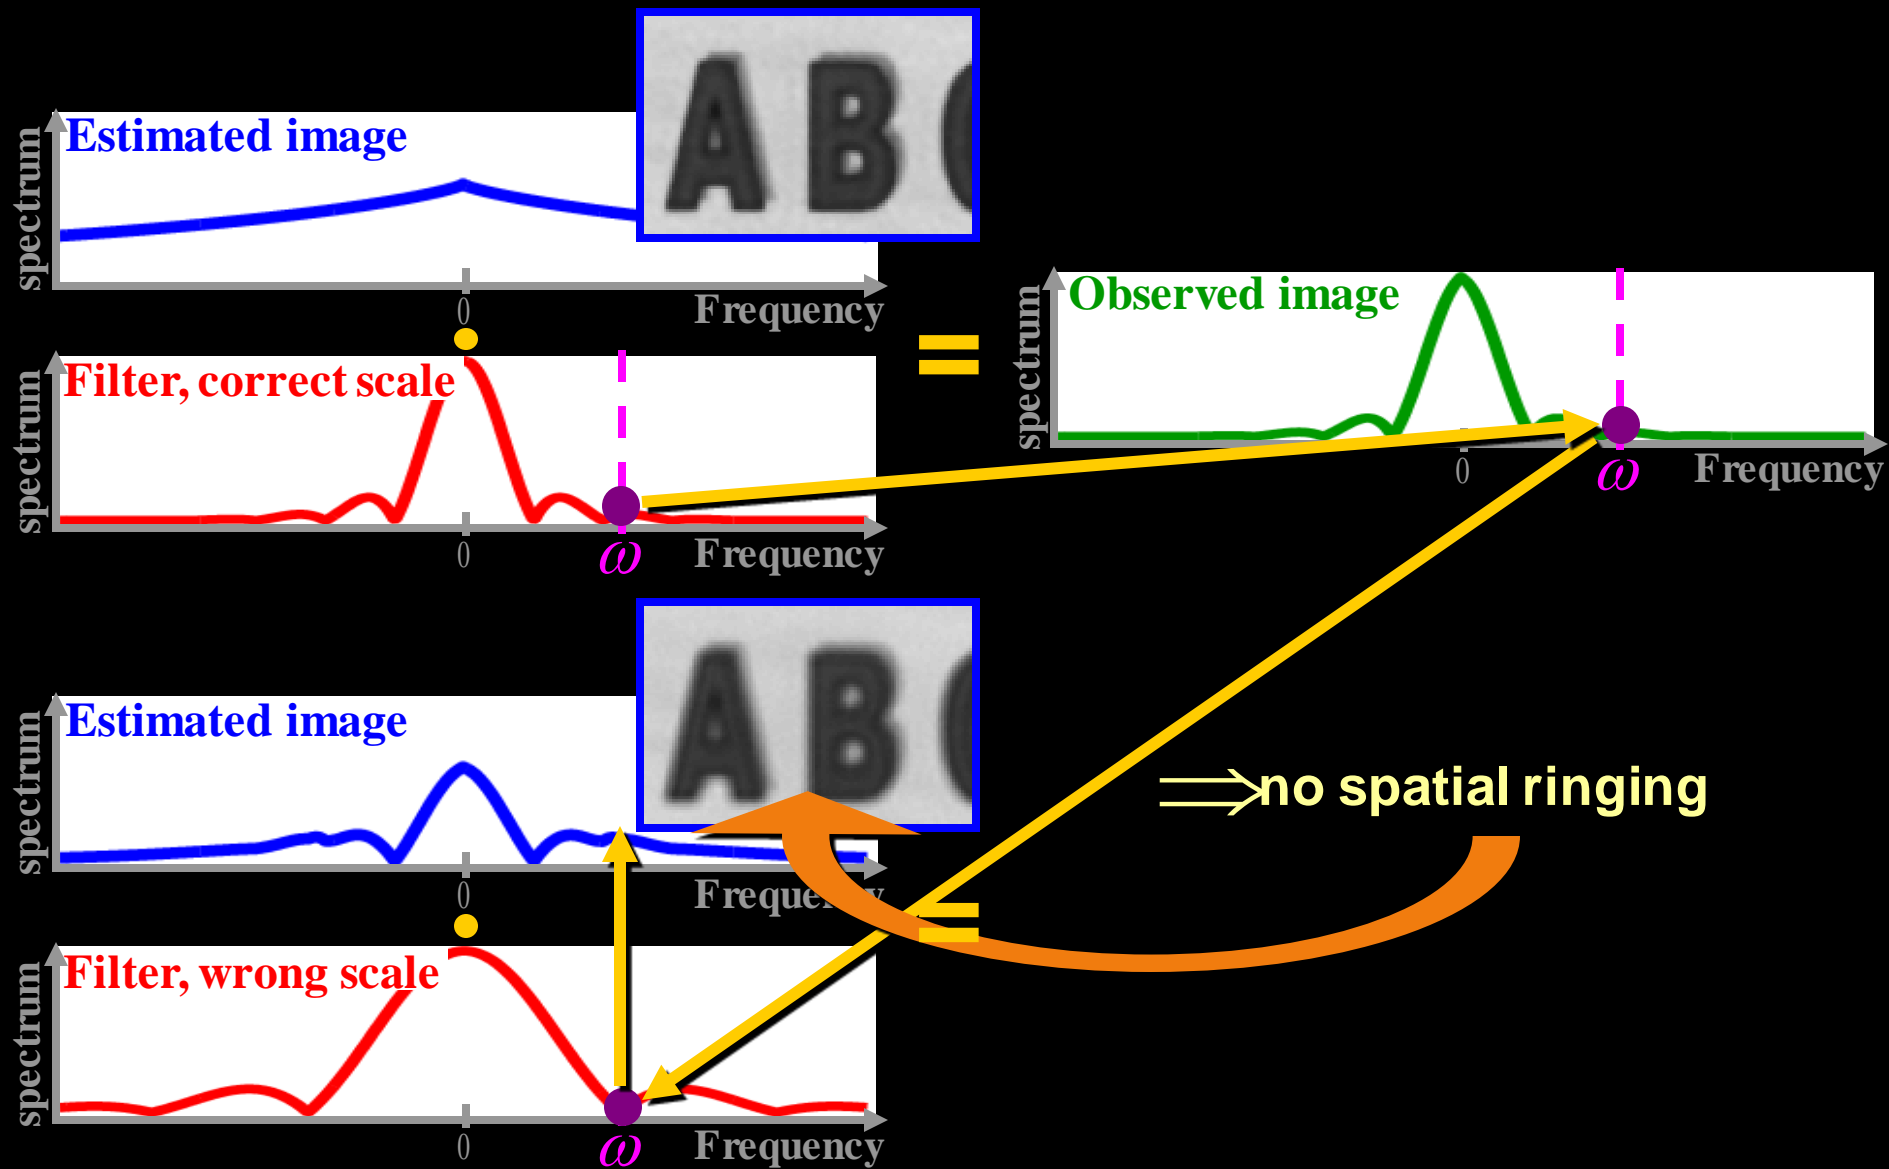

# Filter Design

Analytically search for a pattern maximizing discrimination between images at different defocus scales (*KL-divergence*)

Account for image prior and physical constraints

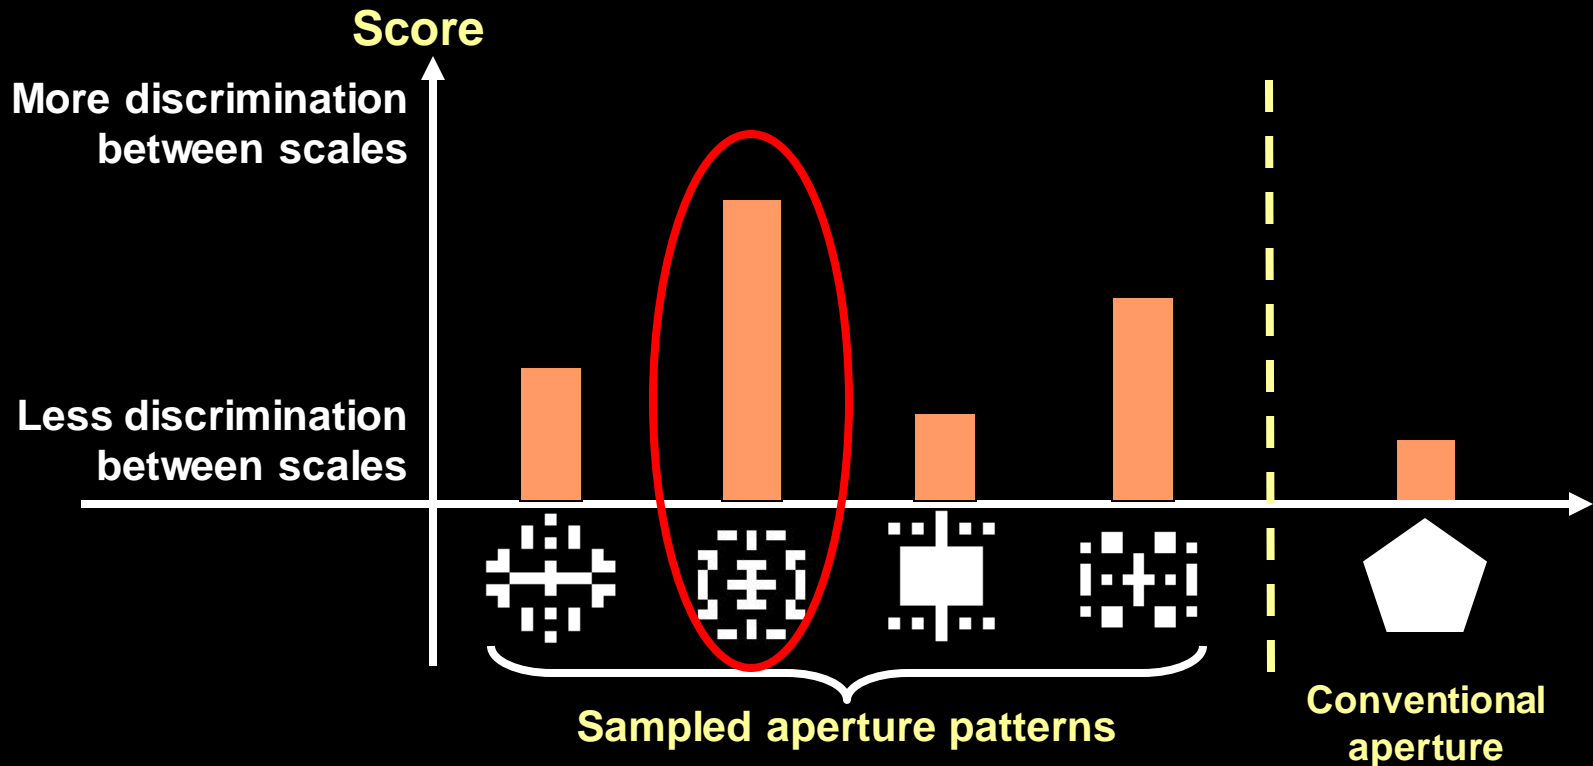

# Depth results

---




# Regularizing depth estimation


Try deblurring with 10 different aperture scales

$$x = \arg \min \underbrace{|f \otimes x - y|^2}_{\text{Convolution error}} + \lambda \underbrace{\sum_i \rho(\nabla x_i)}_{\text{Derivatives prior}}$$

Keep minimal error scale in each local window + regularization

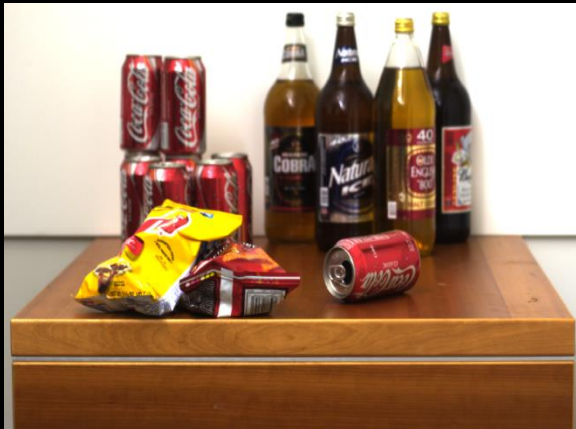

Input

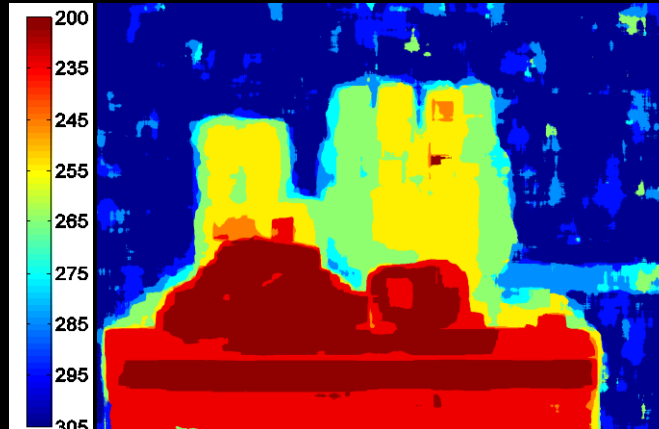

Local depth estimation




Regularized depth


# Regularizing depth estimation



Input

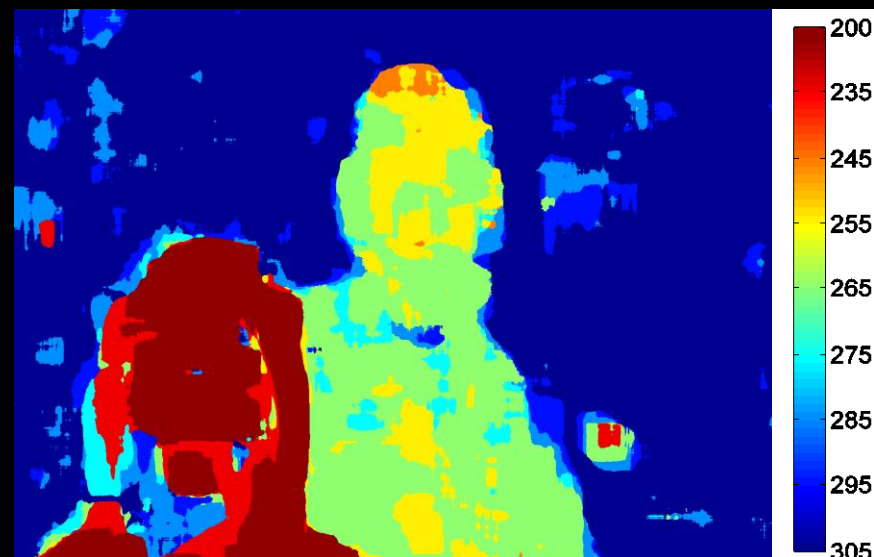

Local depth estimation

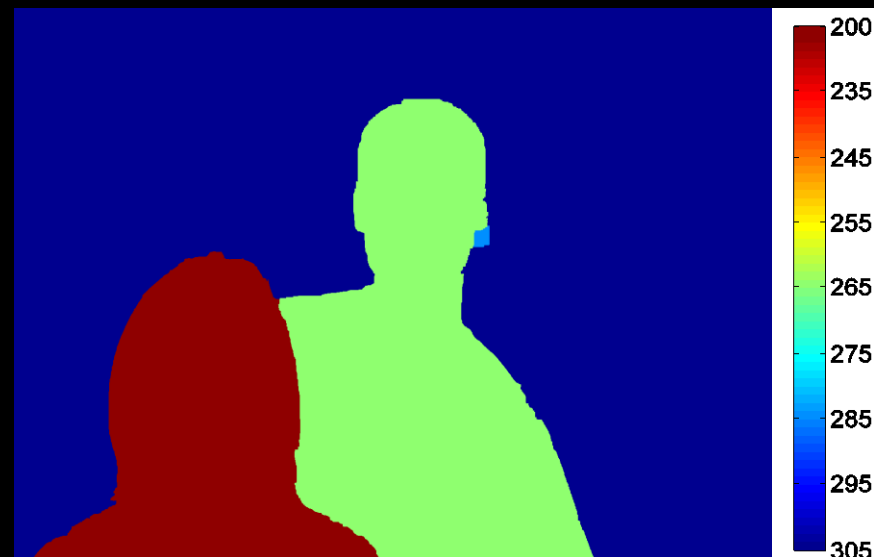

Regularized depth

**All focused results**

---

# Input




# All-focused (deconvolved)



# Close-up

---


Original image

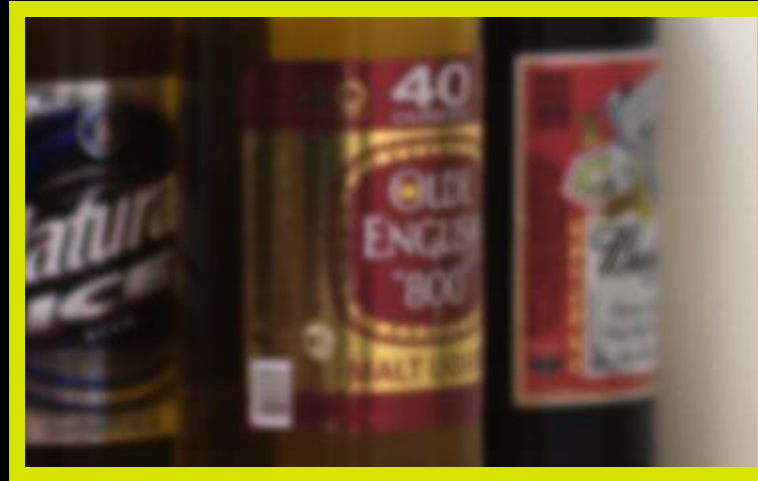

All-focus image




# Comparison- conventional aperture result

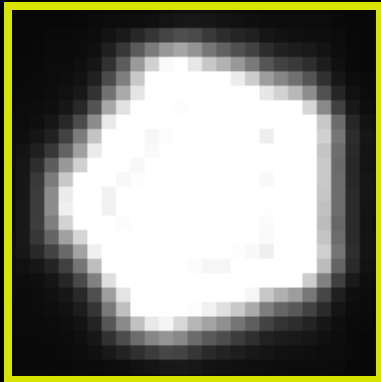

Ringing due to wrong scale estimation




# Comparison- coded aperture result

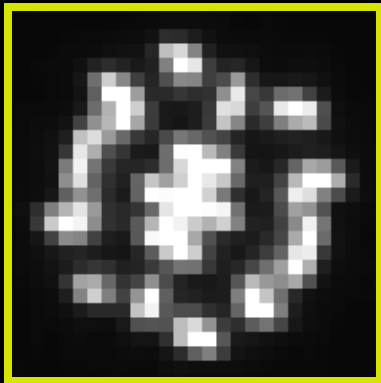



Input

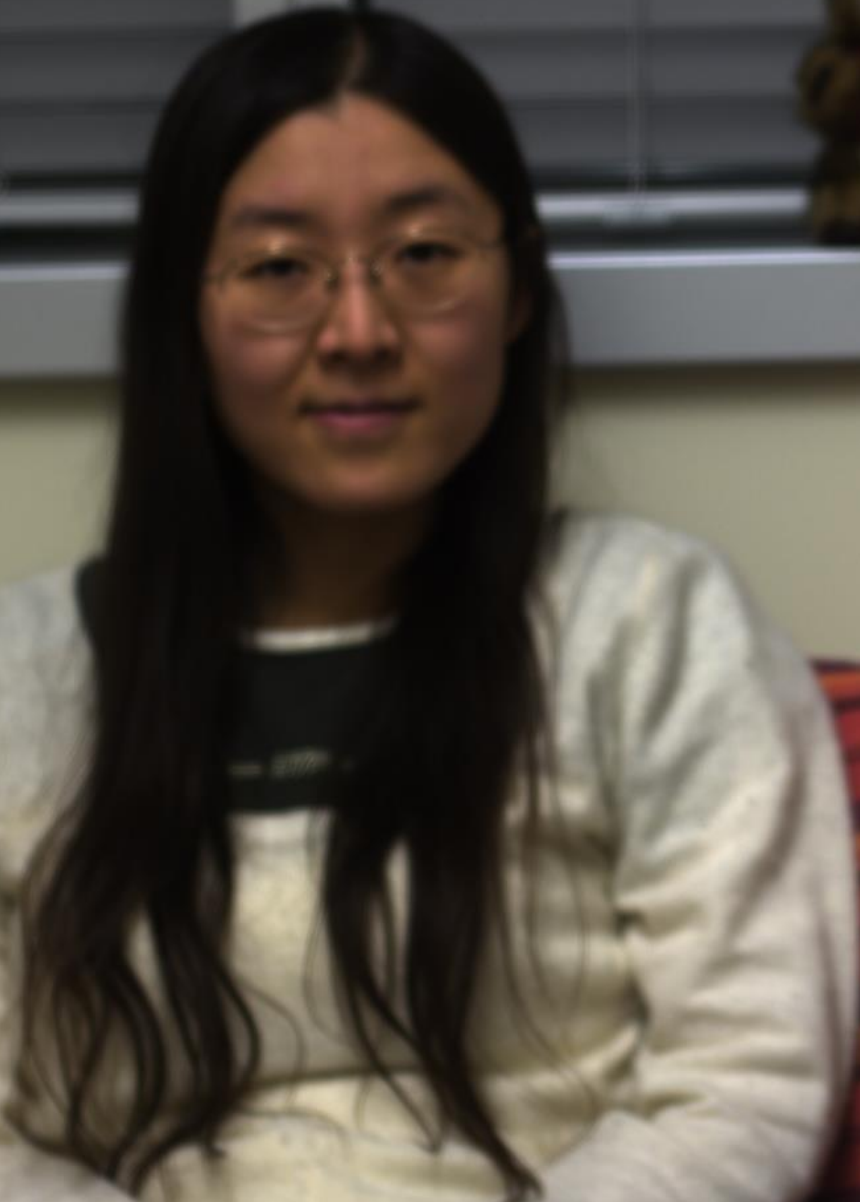

**All-focused  
(deconvolved)**



# Close-up

---



Original image



All-focus image



Naïve sharpening


# Application: Digital refocusing from a single image

---



# Application: Digital refocusing from a single image

---

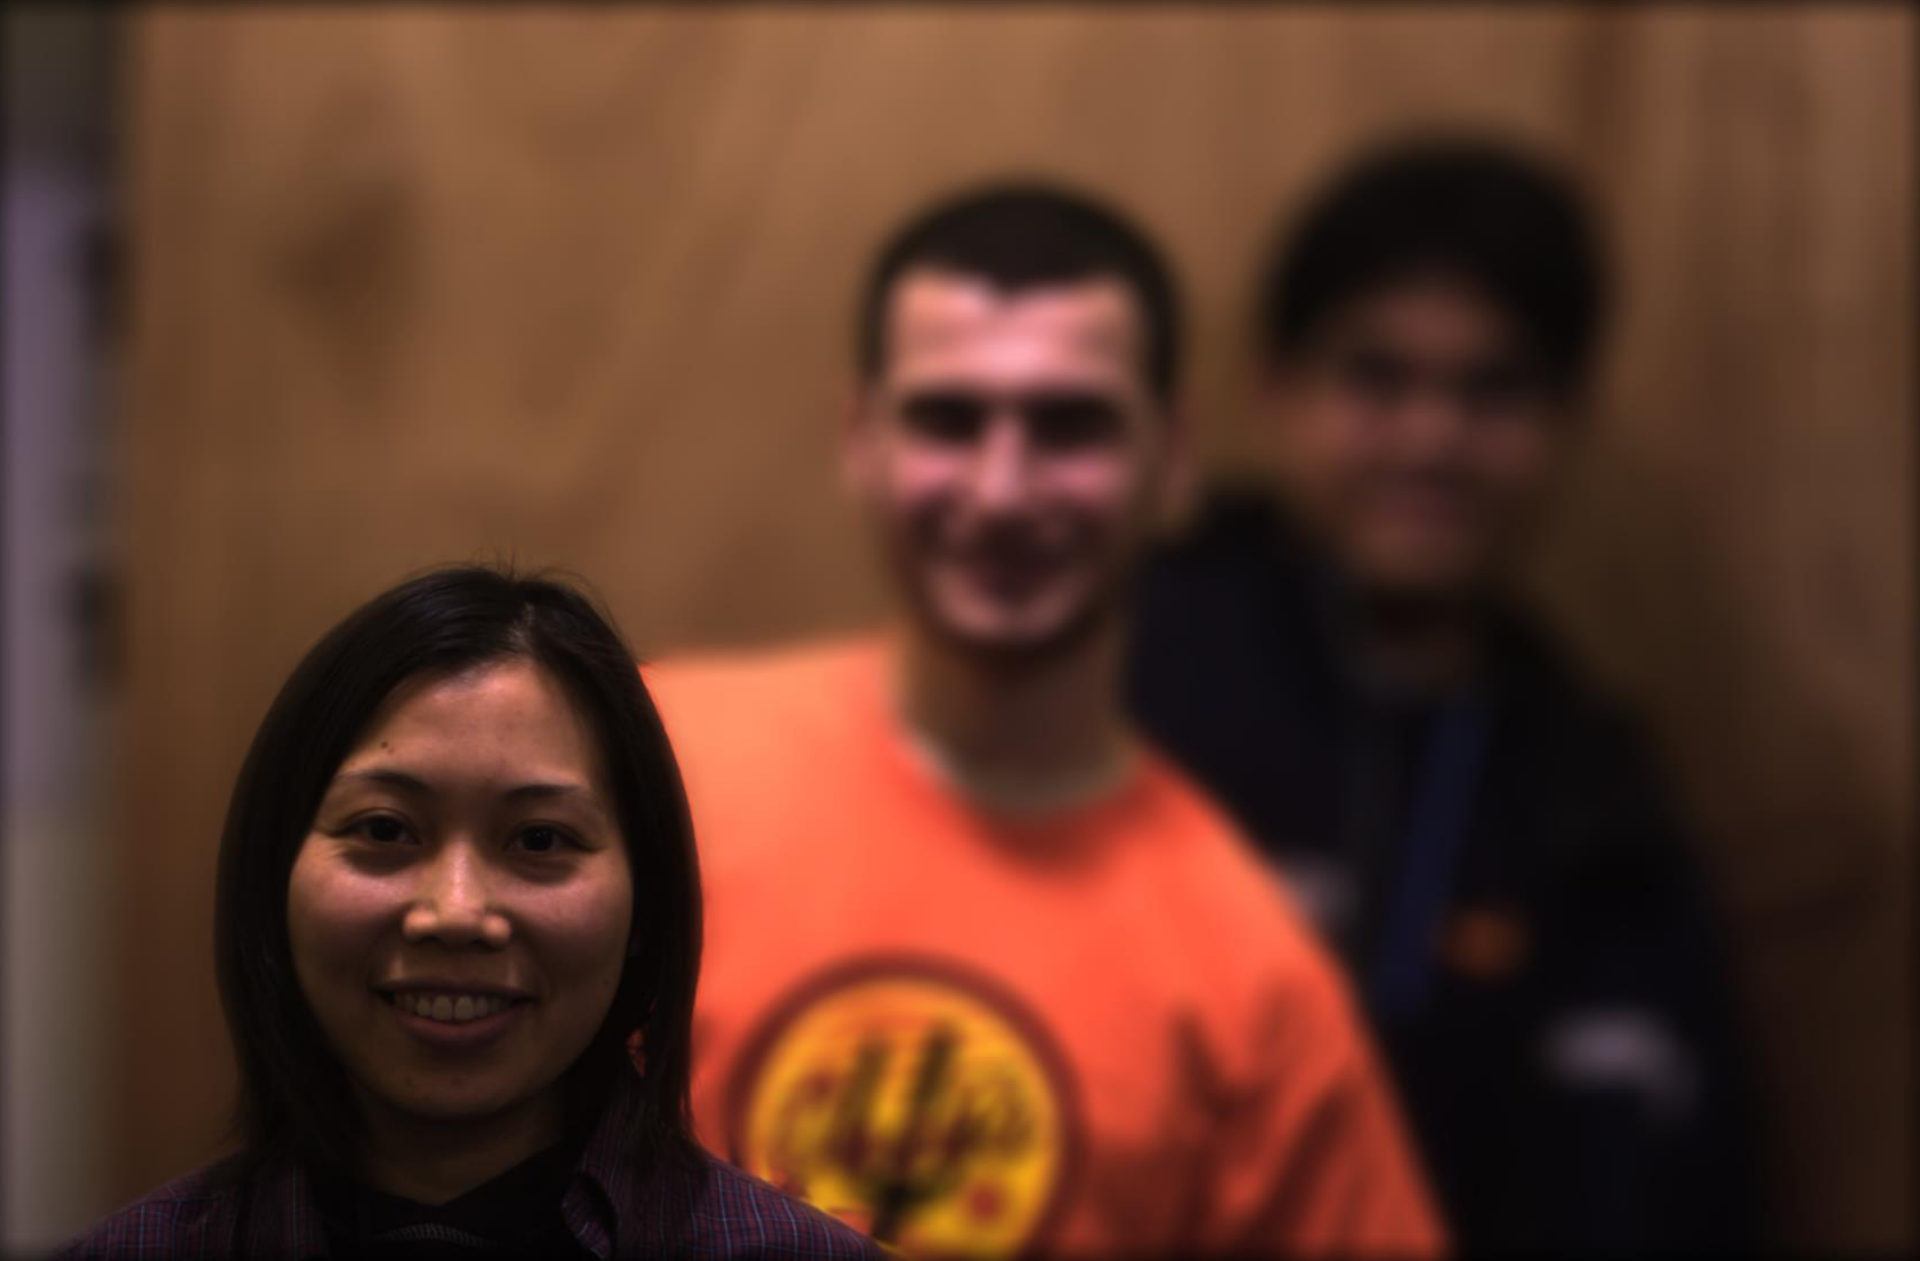

# Application: Digital refocusing from a single image

---



# Application: Digital refocusing from a single image

---



# Application: Digital refocusing from a single image


---





# Application: Digital refocusing from a single image

---

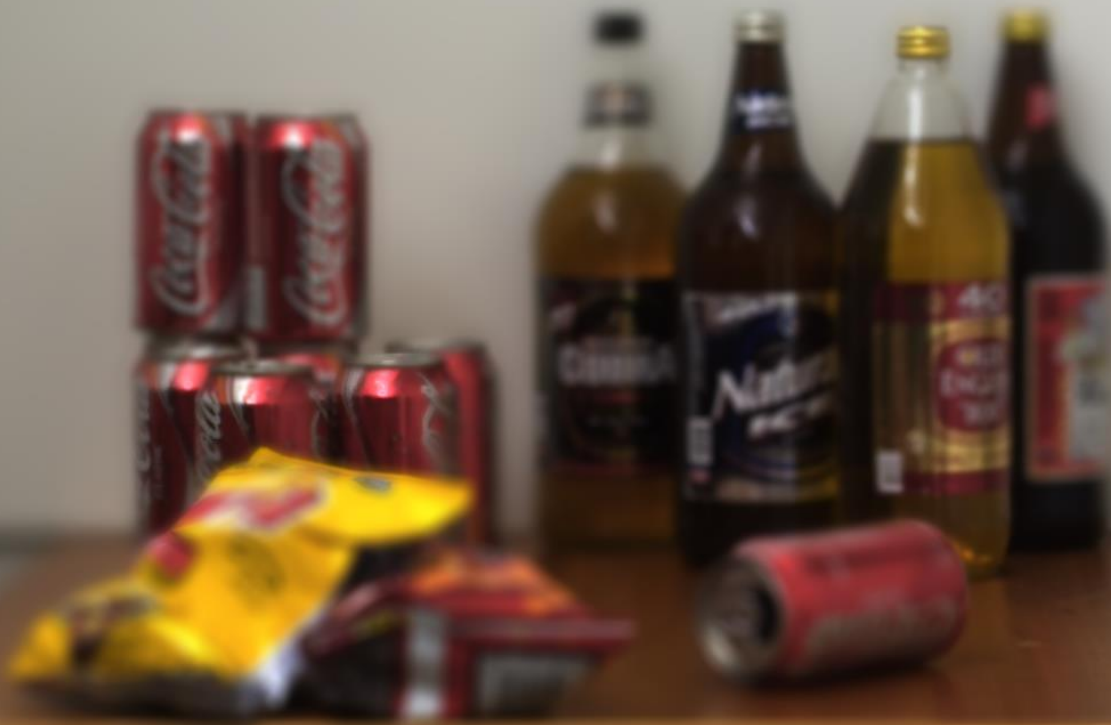

# Application: Digital refocusing from a single image


---



# Coded aperture: pros and cons

---

- + Image AND depth at a single shot
- + No loss of image resolution
- + Simple modification to lens
- Depth is coarse
  - unable to get depth at untextured areas, might need manual corrections.
- + But depth is a pure bonus
- Lose some light
- + But deconvolution increases depth of field

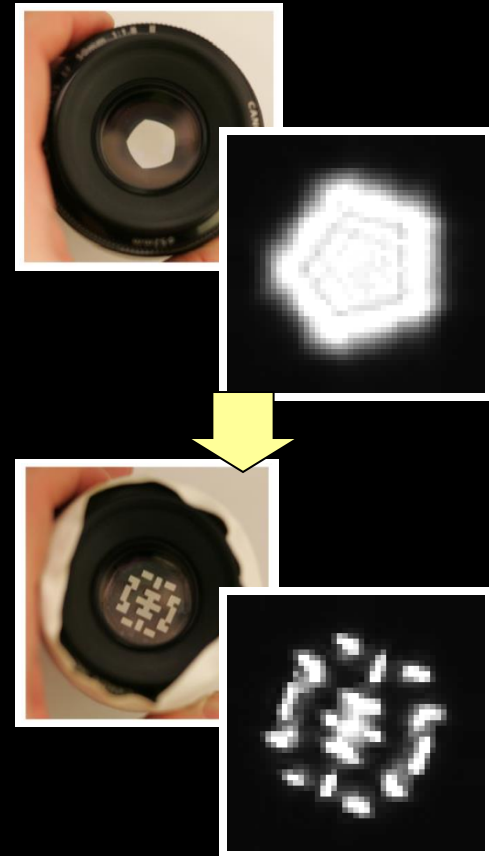



**50mm f/1.8: \$79.95**

**Cardboard: \$1**

**Tape: \$1**

**Depth acquisition: priceless**

***CodedAperture***

Some more quick examples


# Motion-Invariant Photography

Anat Levin Peter Sand Taeg Sang Cho Frédo Durand William T. Freeman

Massachusetts Institute of Technology, Computer Science and Artificial Intelligence Laboratory



- Quickly move camera in a parabola when taking a picture
- A motion at any speed in the direction of the parabola will give the same blur kernel

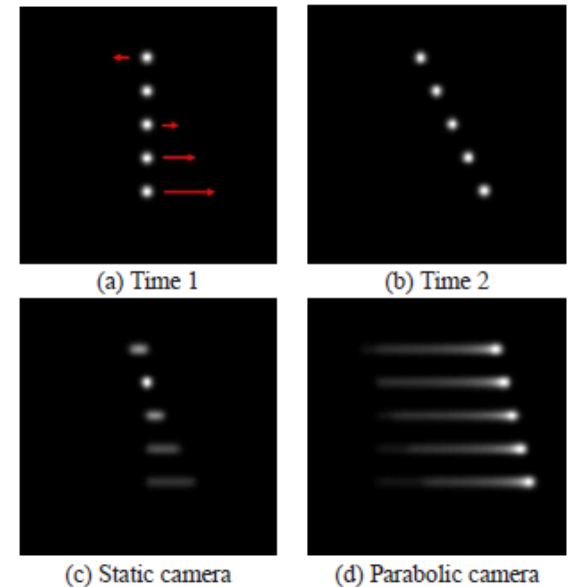

# Results

Static  
Camera



Parabolic  
Camera



# Results

Static Camera



Parabolic Camera



Motion in  
wrong  
direction




# Looking Around the Corner using Transient Imaging


Ahmed Kirmani <sup>\*1</sup>, Tyler Hutchison<sup>1</sup>, James Davis <sup>†2</sup>, and Ramesh Raskar<sup>‡1</sup>

<sup>1</sup>MIT Media Laboratory


<sup>2</sup> UC Santa Cruz

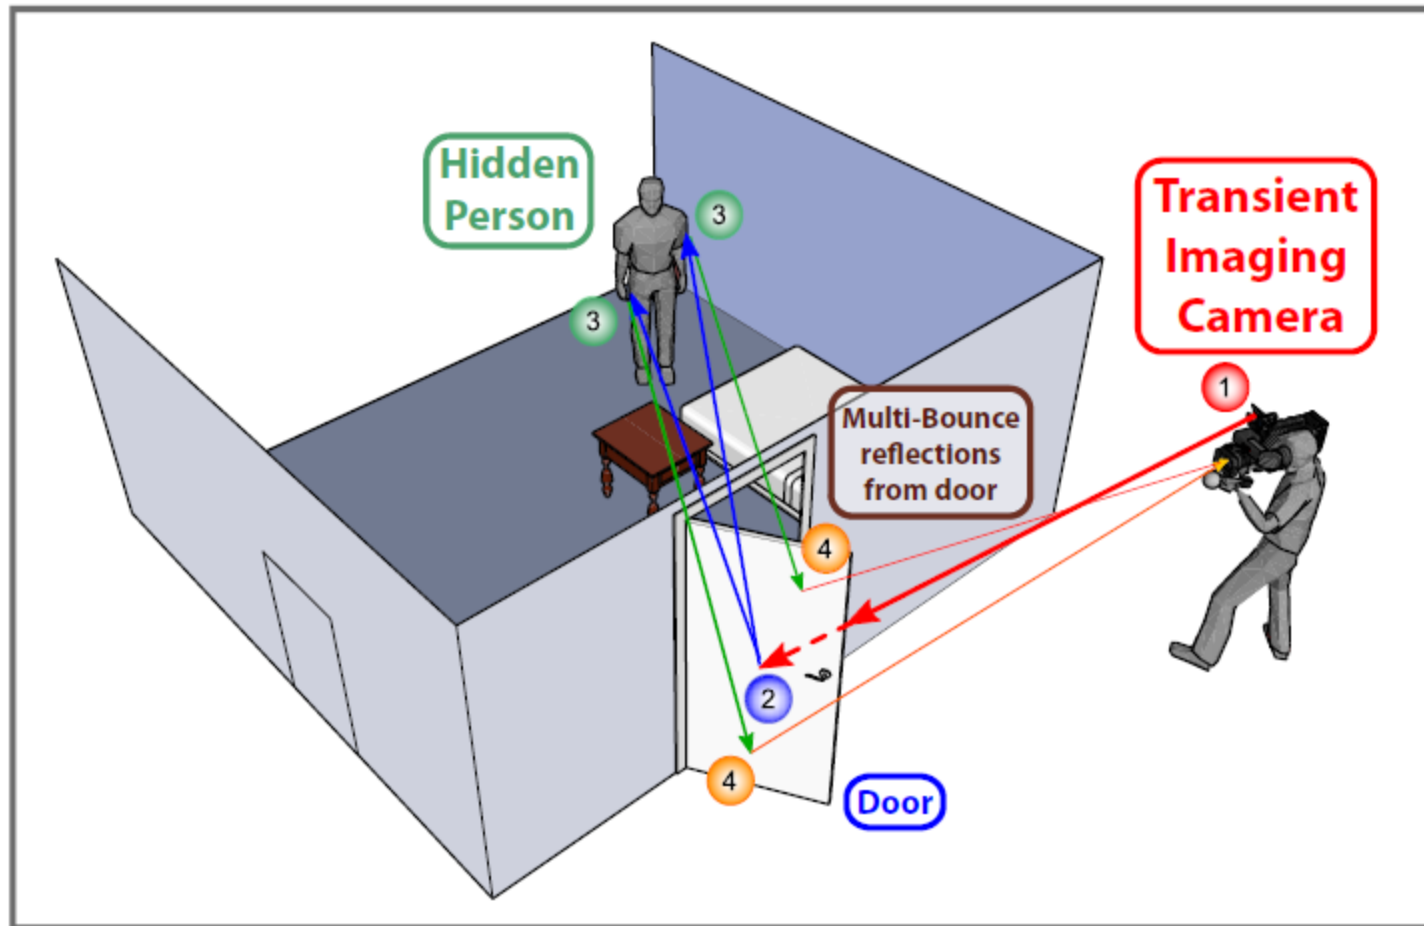

# RGBW Sensors

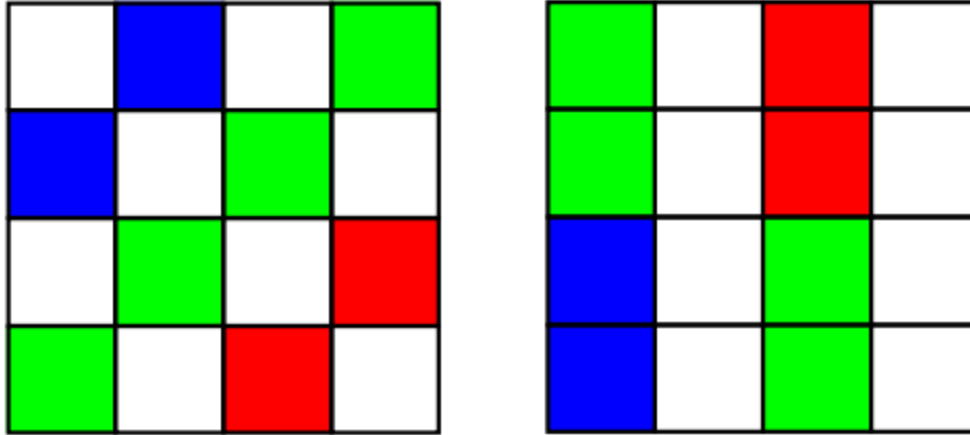

- 2007: Kodak 'Panchromatic' Pixels
- Outperforms Bayer Grid
  - 2X-4X sensitivity (W: no filter loss)
  - May improve dynamic range ( $W \gg$  RGB sensitivity)

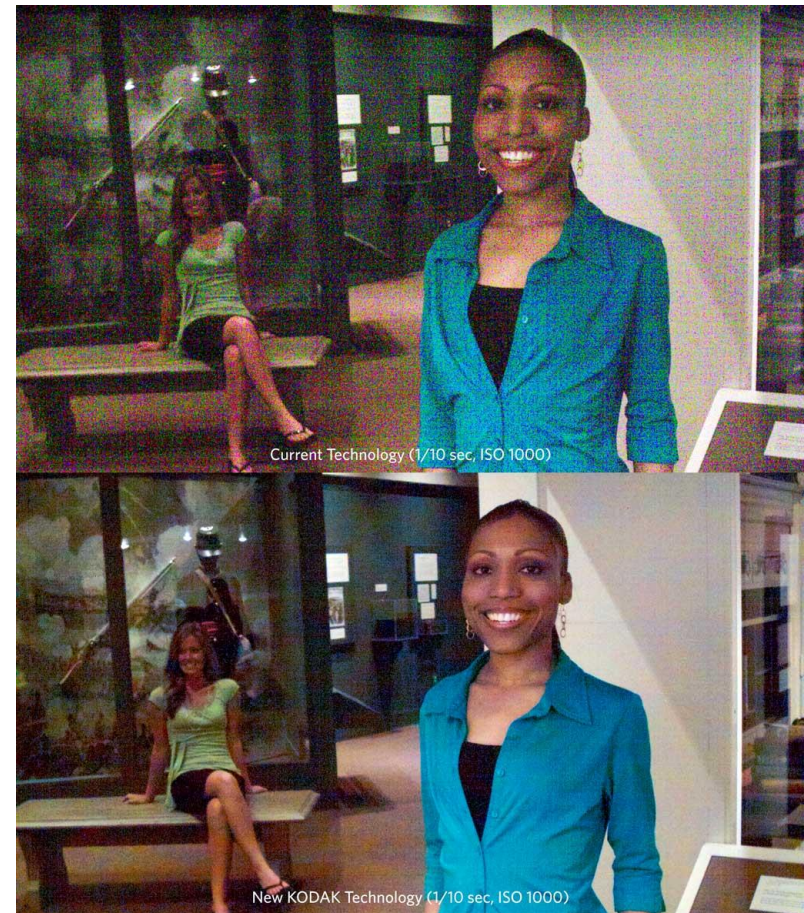

KODAK Image Sensor Technology Improves Camera Performance under Low Light

**Kodak**

# Computational Approaches to Display

- 3D TV without glasses
  - 20", \$2900, available in Japan (2010)
  - You see different images from different angles



Toshiba

[http://news.cnet.com/8301-13506\\_3-20018421-17.html](http://news.cnet.com/8301-13506_3-20018421-17.html)

Newer version: <http://www.pcmag.com/article2/0,2817,2392380,00.asp>

<http://reviews.cnet.com/3dtv-buying-guide/>

# Recap of questions

- How can we represent all of the information contained in light?
- What are the fundamental limitations of cameras?
- What sacrifices have we made in conventional cameras? For what benefits?
- How else can we design cameras for better focus, deblurring, multiple views, depth, etc.?

# Next class

- Exam review



- But first, have a good Thanksgiving break!