

Data Structures

AVL Trees

CS 225

September 27, 2024

Brad Solomon



UNIVERSITY OF
ILLINOIS
URBANA - CHAMPAIGN

Department of Computer Science

Learning Objectives

Review why we need balanced trees


Review what an AVL rotation does

Review the four possible rotations for an AVL tree

Explore the implementation of AVL Tree


BST Analysis – Running Time

	BST Worst Case
find	$O(h)$
insert	$O(h)$
delete	$O(h)$
traverse	$O(n)$

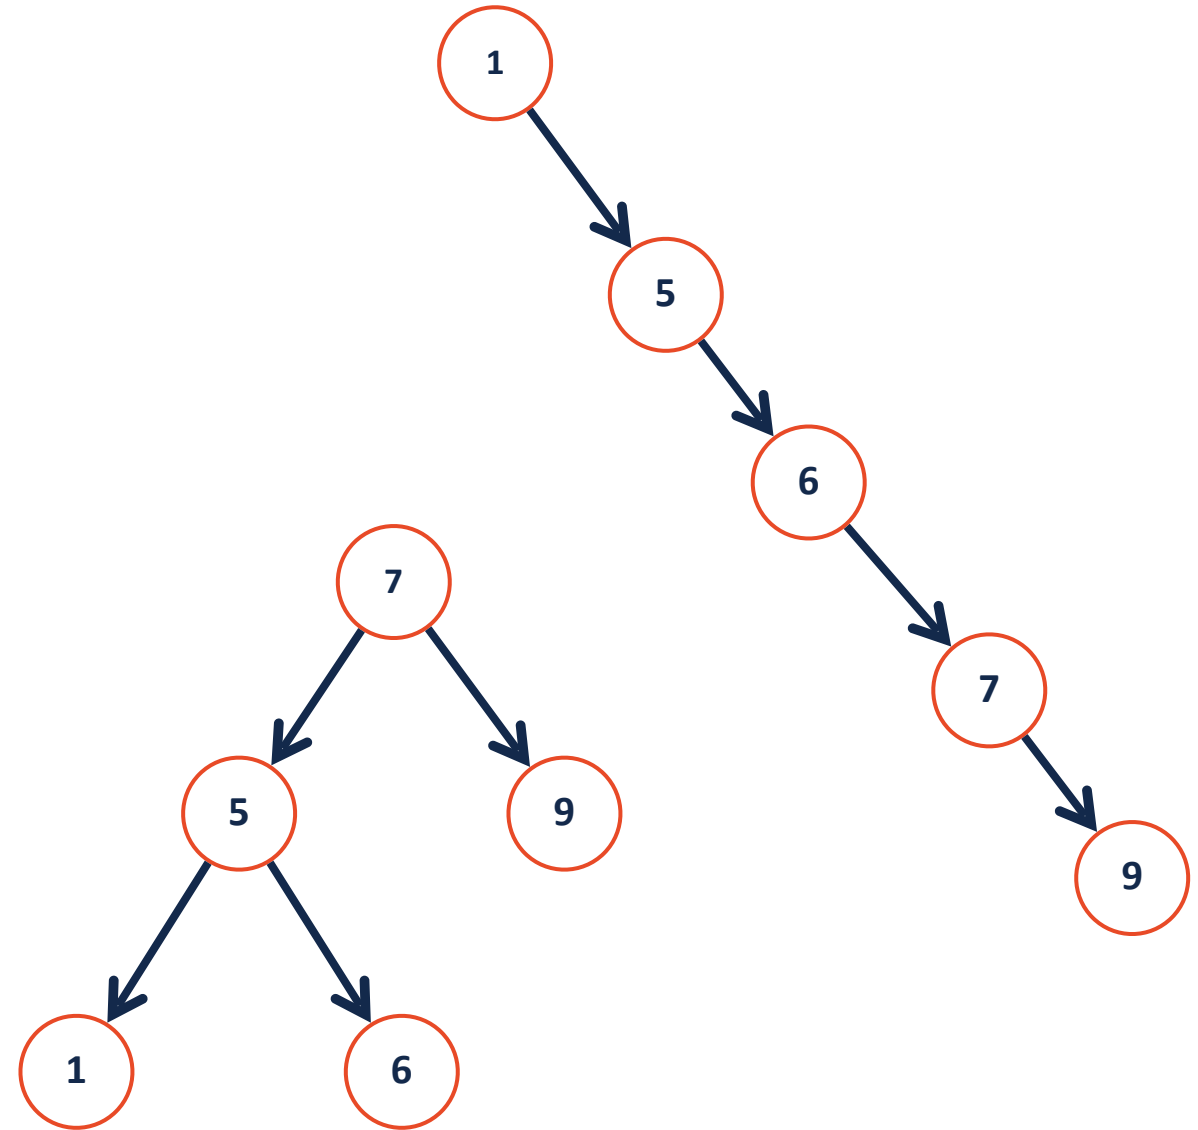


AVL-Tree: A self-balancing binary search tree

Every node in an AVL tree has a balance of:

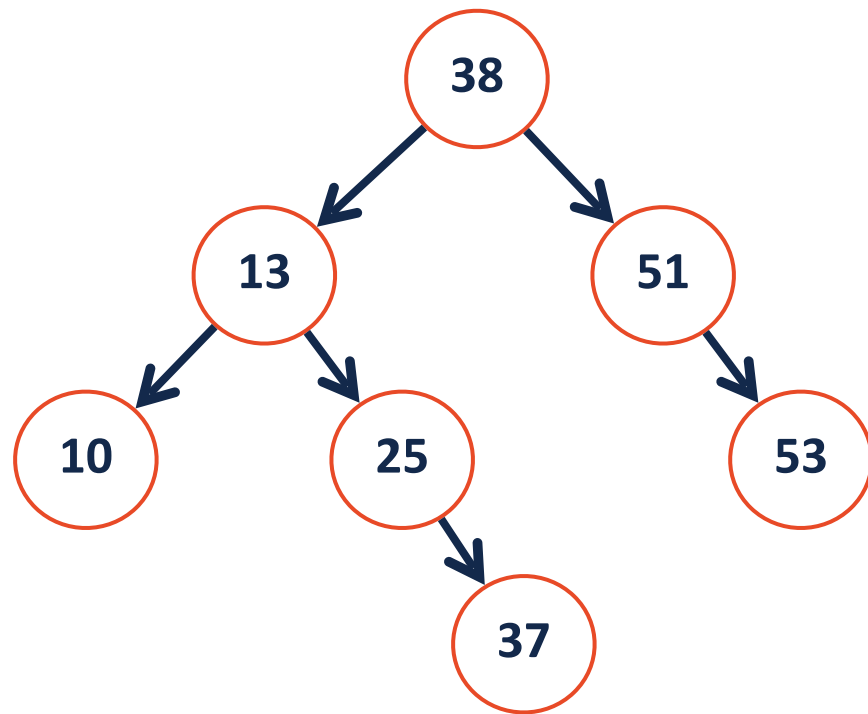


Left Rotation

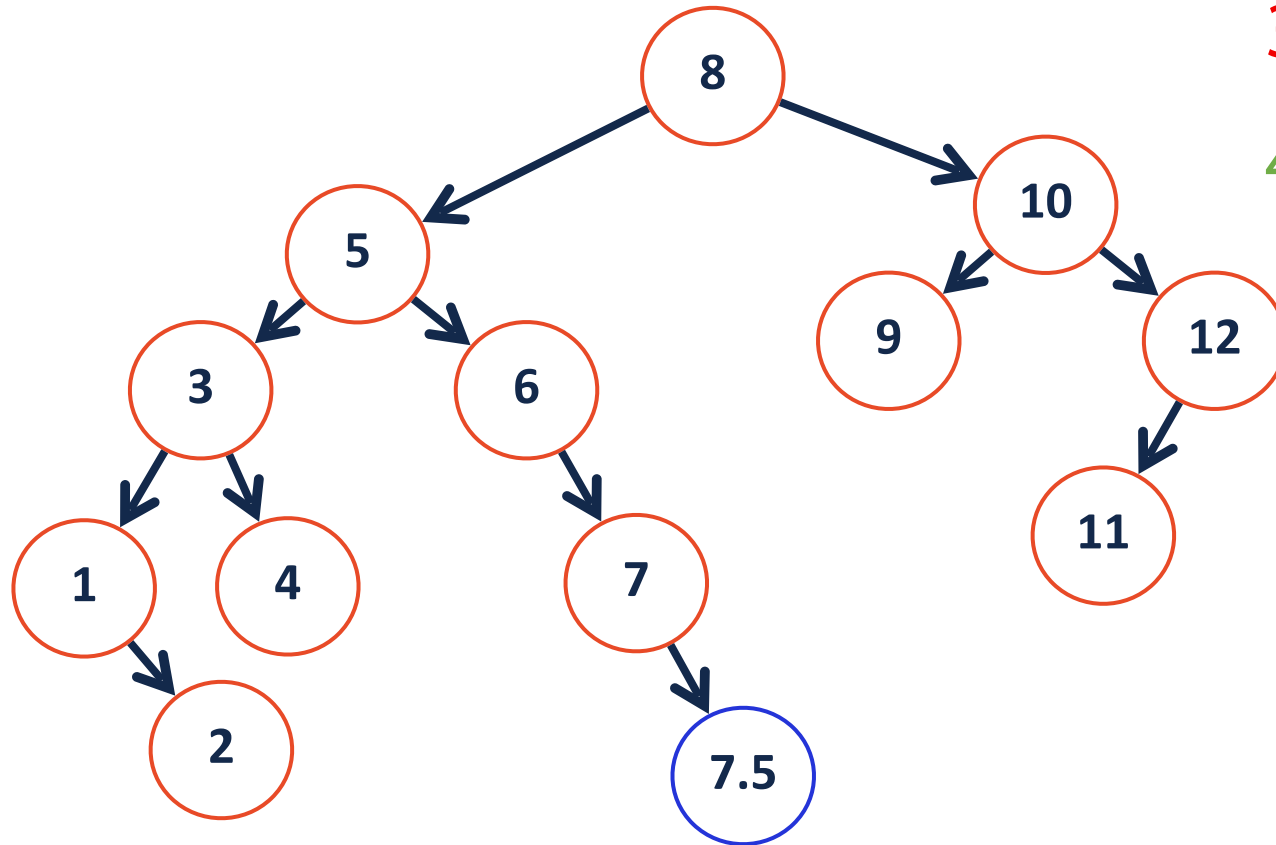

- 1) Create a tmp pointer to root
- 2) Update root to point to mid
- 3) tmp->right = root->left
- 4) root->left = tmp

Left Rotation


All rotations are local (subtrees are not impacted)

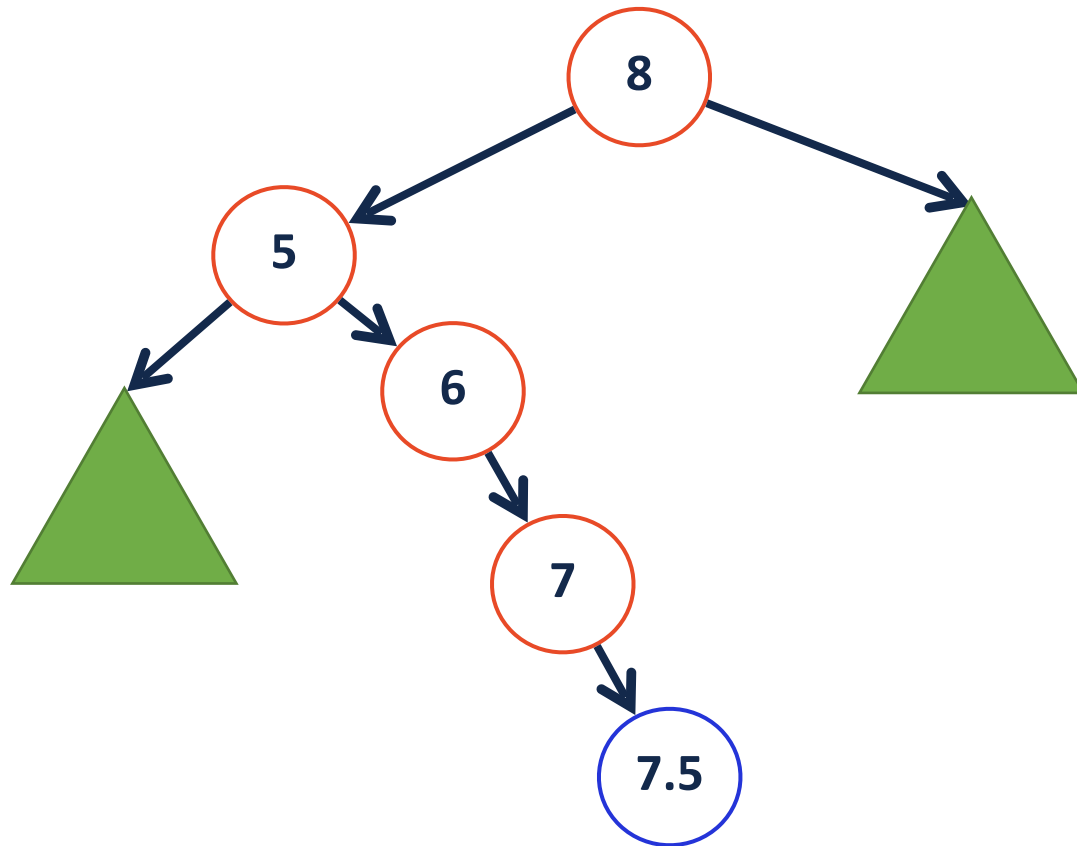


Left Rotation



All rotations preserve BST property

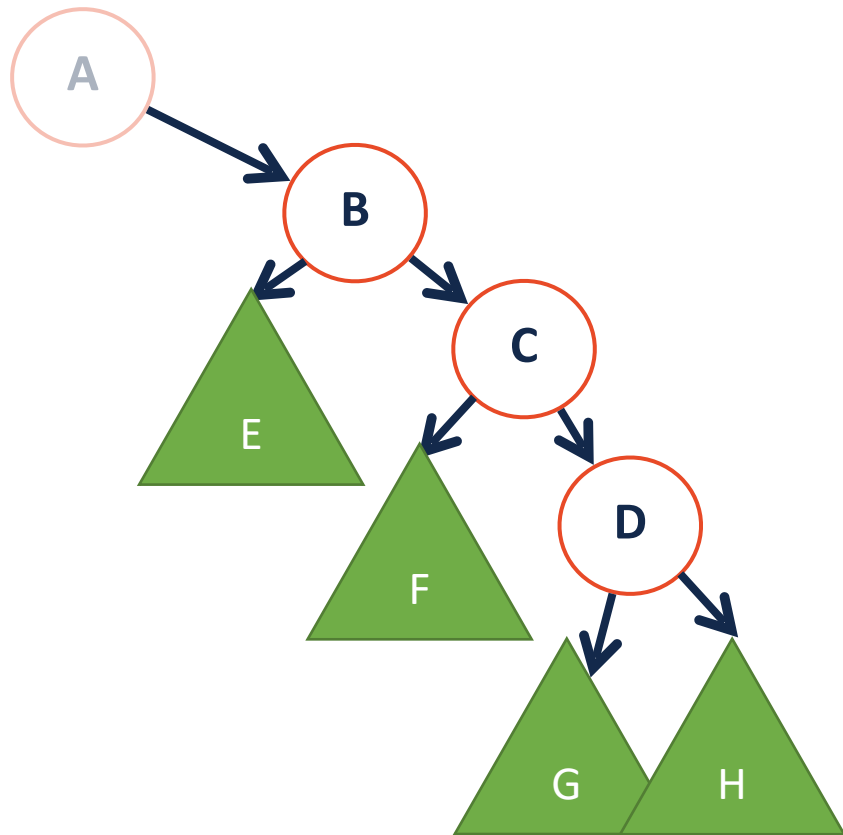


Right Rotation

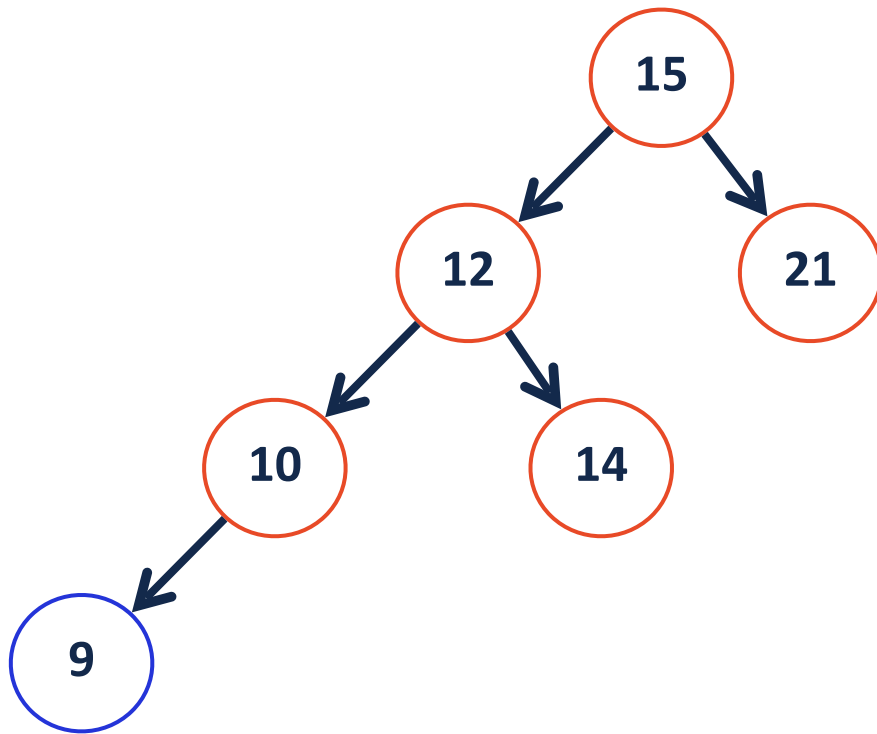


- 1) Create a tmp pointer to root
- 2) Update root to point to mid
- 3) tmp->left = root->right
- 4) root->right = tmp


Right Rotation

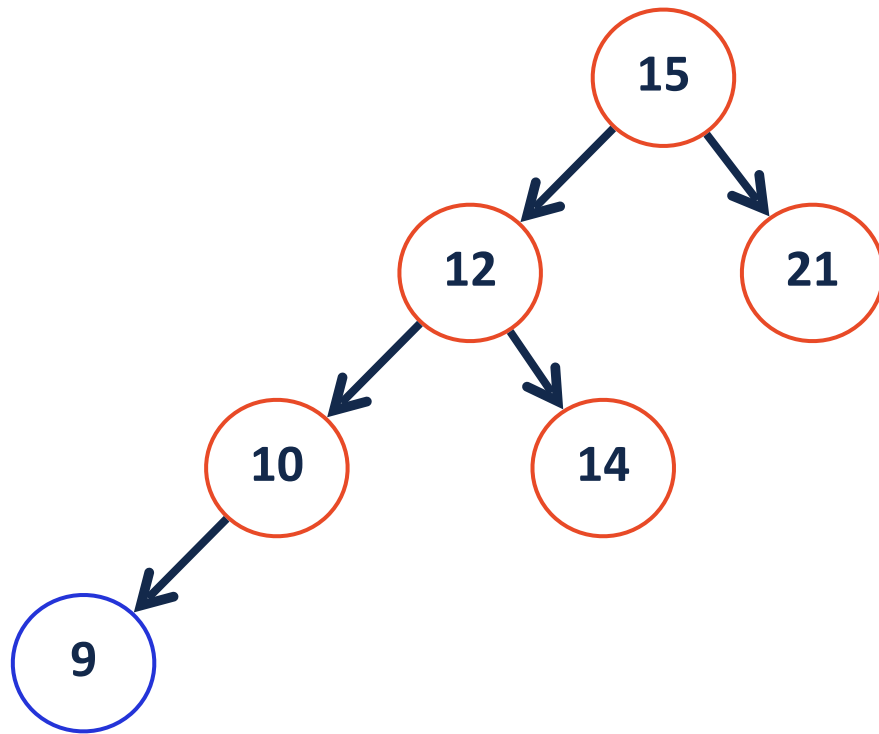


- 1) Create a tmp pointer to root
- 2) Update root to point to mid
- 3) $\text{tmp} \rightarrow \text{left} = \text{root} \rightarrow \text{right}$
- 4) $\text{root} \rightarrow \text{right} = \text{tmp}$

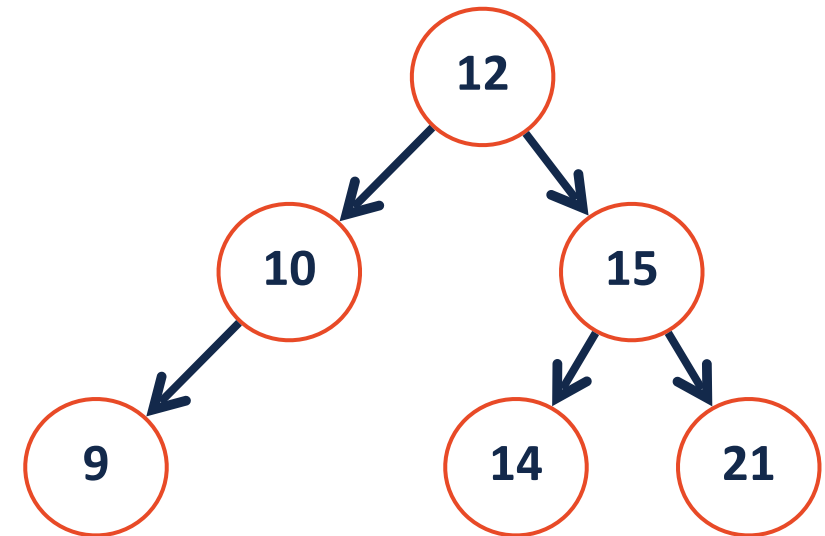

LeftRight Rotation

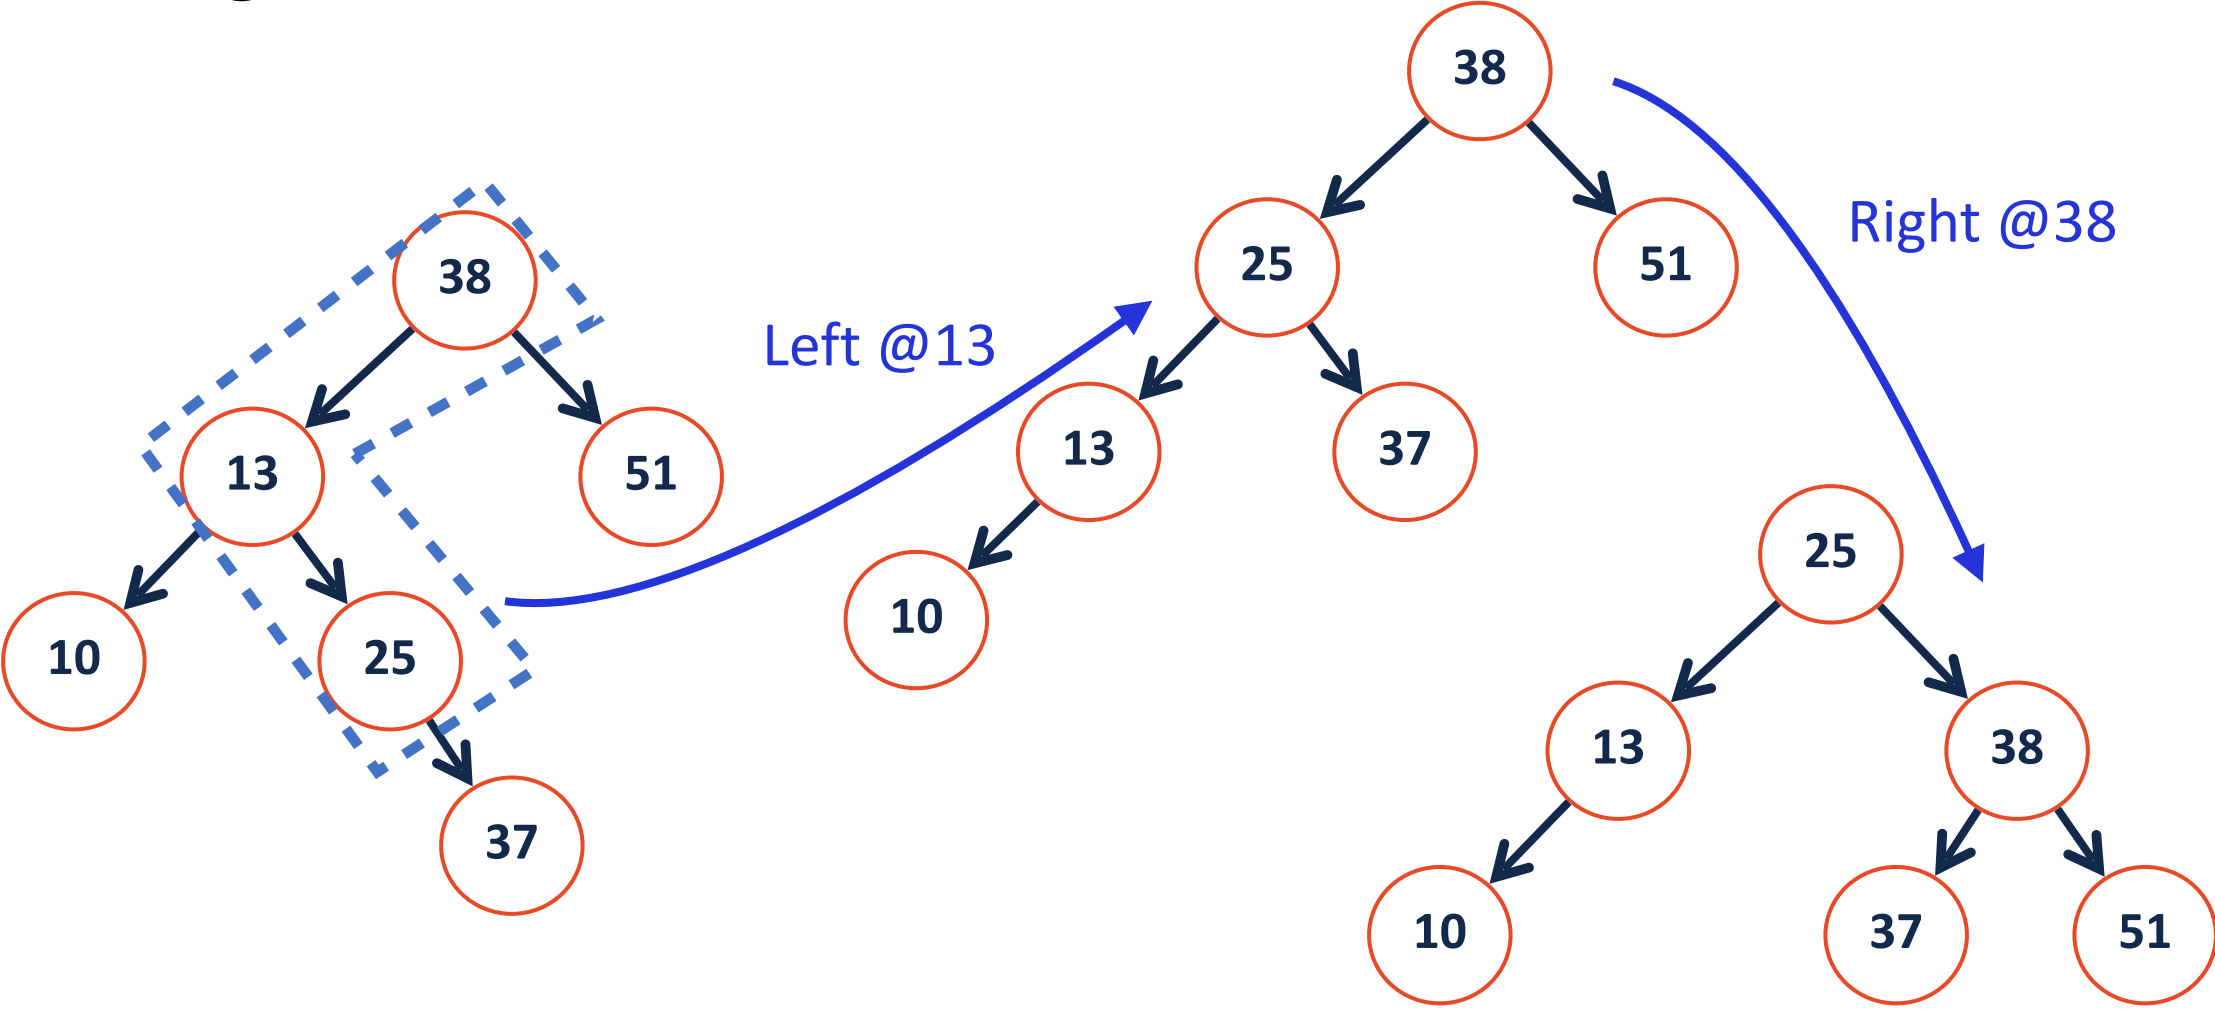


RightLeft Rotation

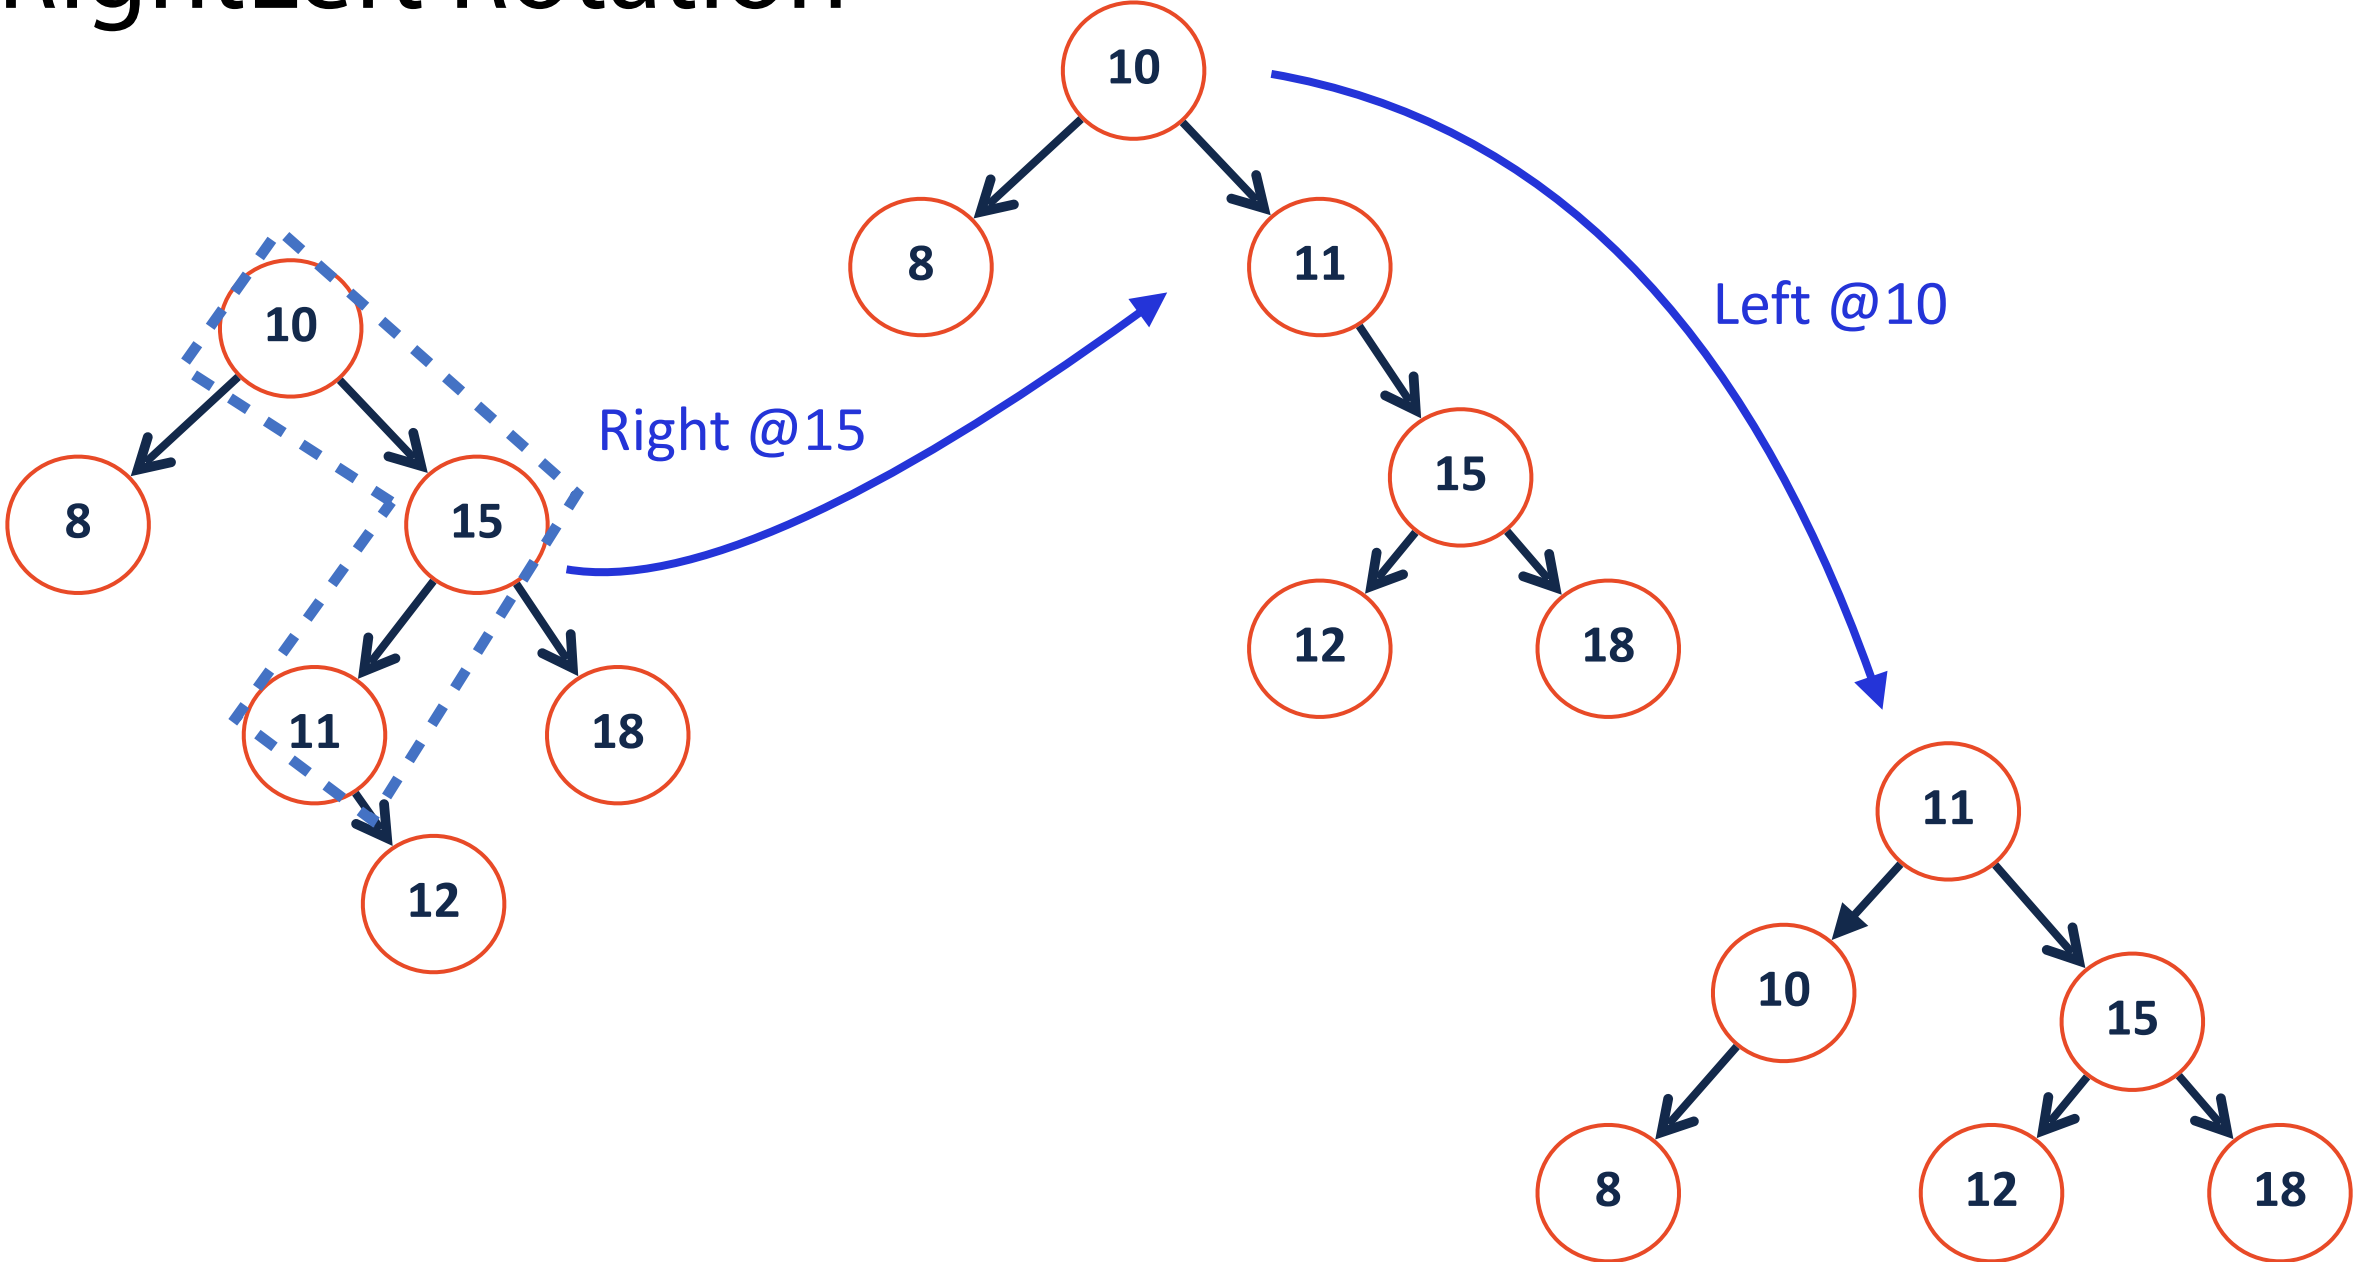


AVL Rotations

Left and right rotation convert **sticks** into **mountains**

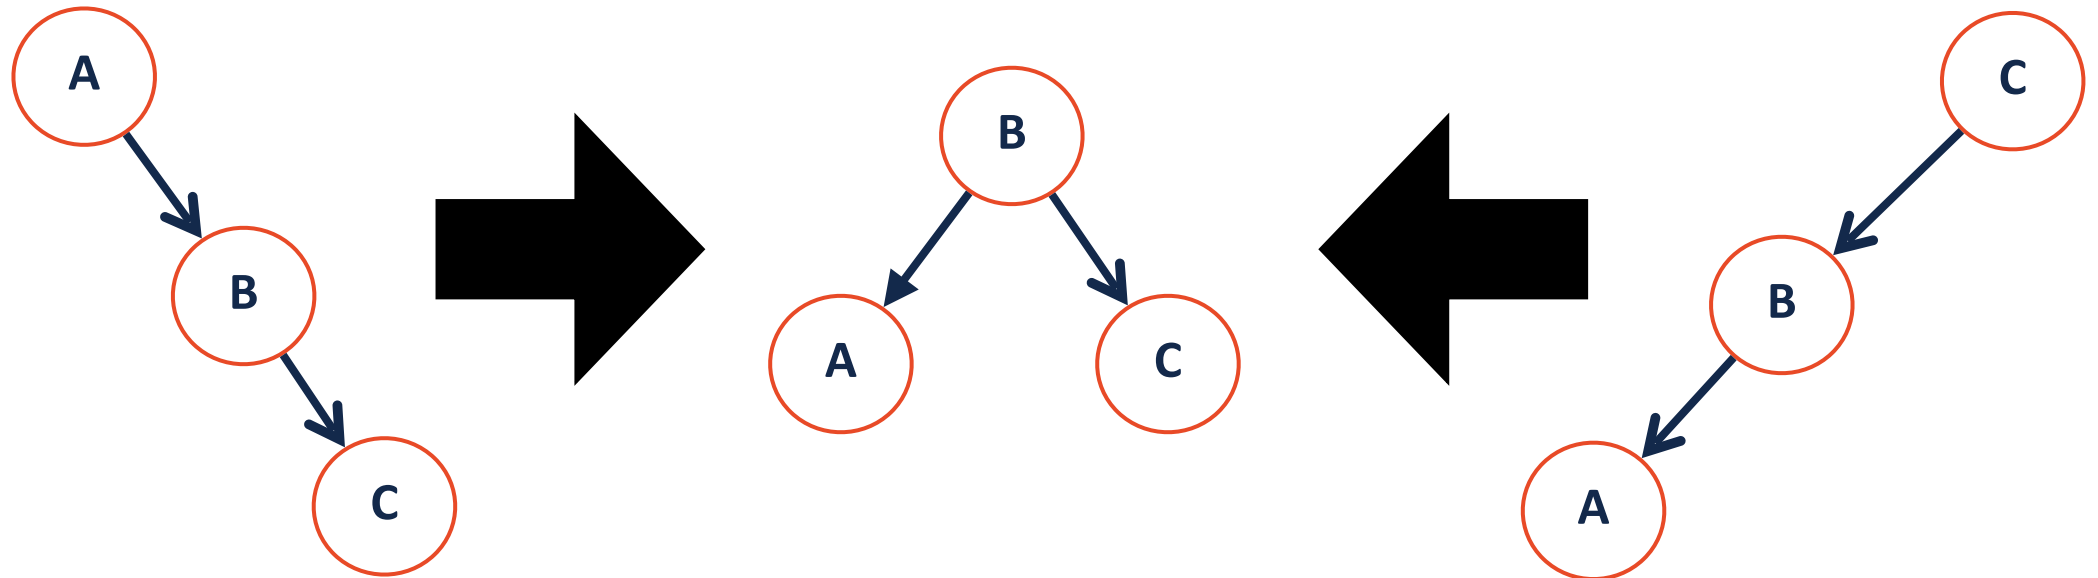

AVL Rotations

LeftRight (RightLeft) convert **elbows** into **sticks** into **mountains**

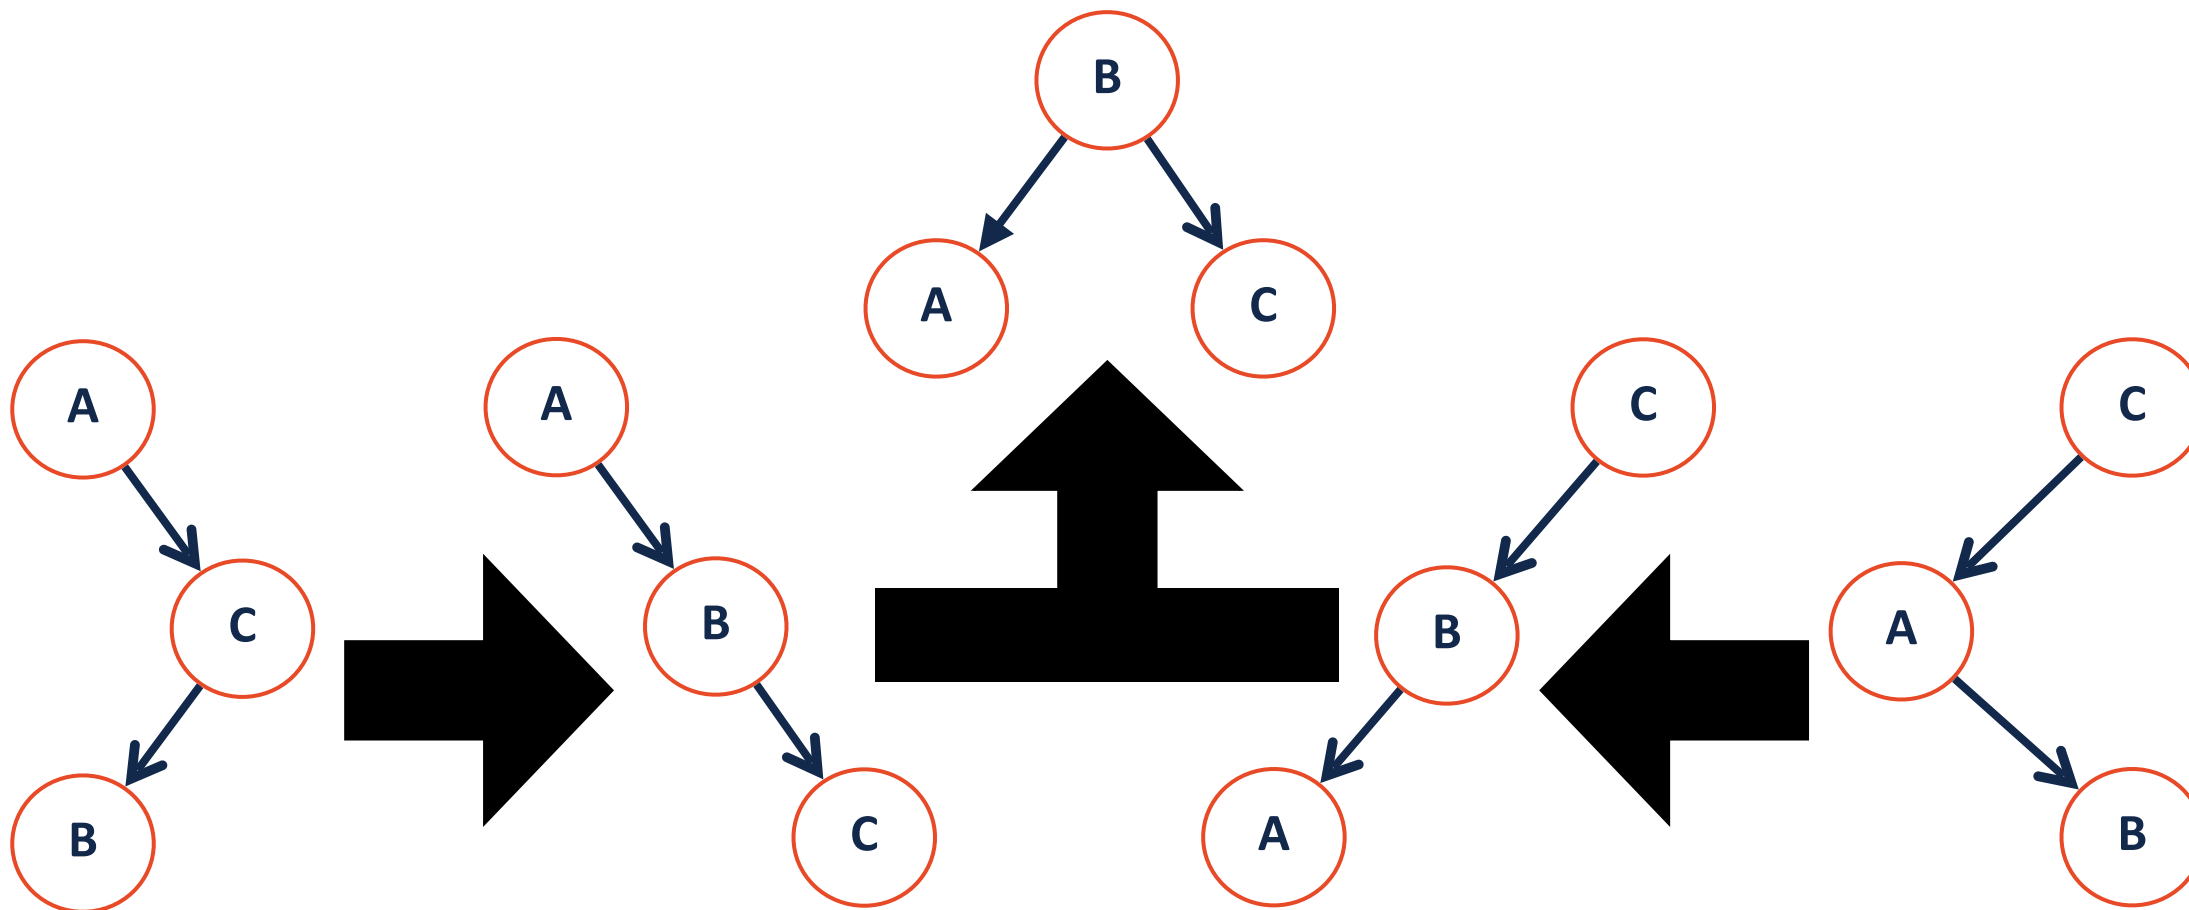



AVL Rotations


Four kinds of rotations: (L, R, LR, RL)

1. All rotations are local (subtrees are not impacted)
2. The running time of rotations are constant
3. The rotations maintain BST property

Goal:


AVL Rotations

We can identify which rotation to do using **balance**

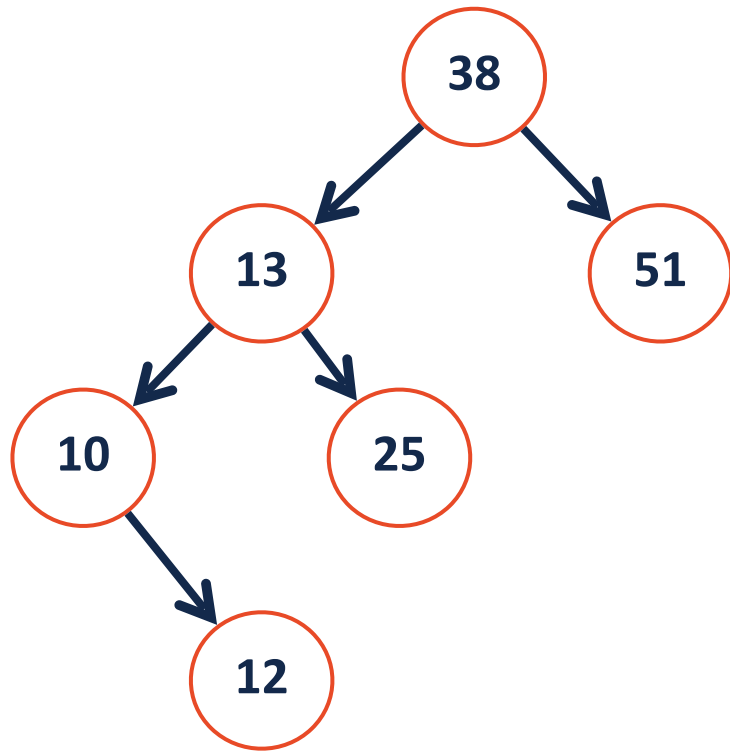


AVL Rotations

We can identify which rotation to do using **balance**

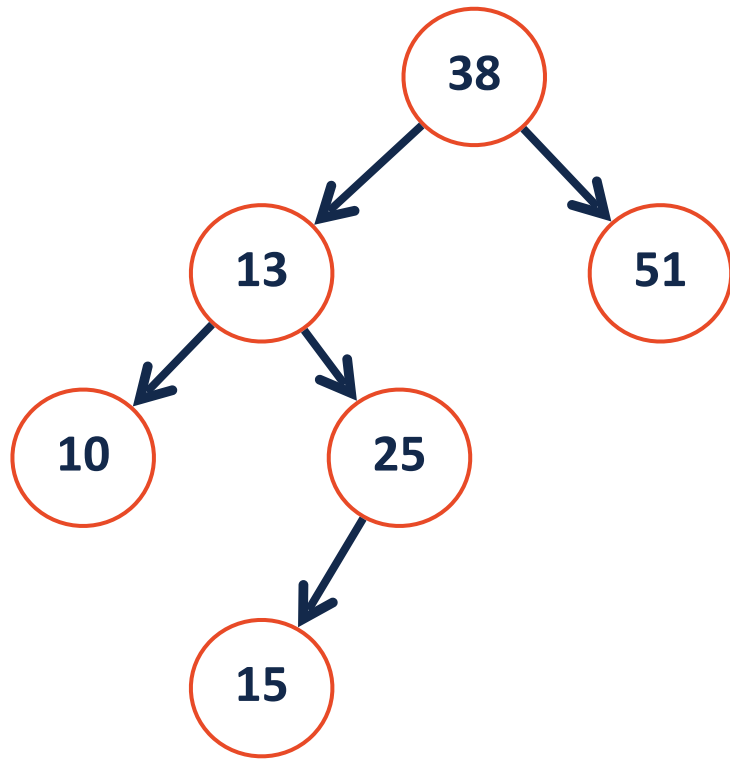


AVL Rotations


Left

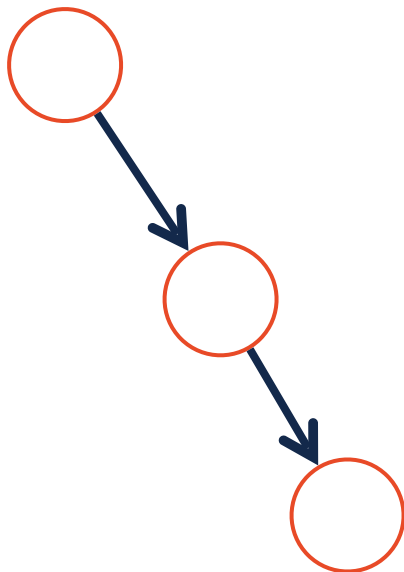


Right

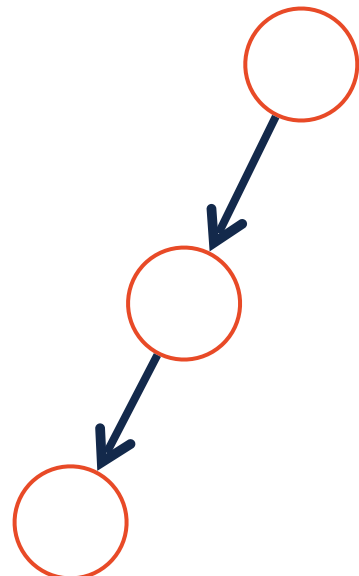

LeftRight

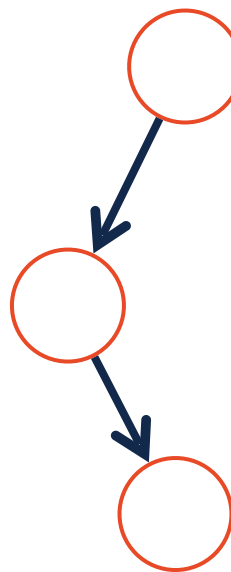

RightLeft

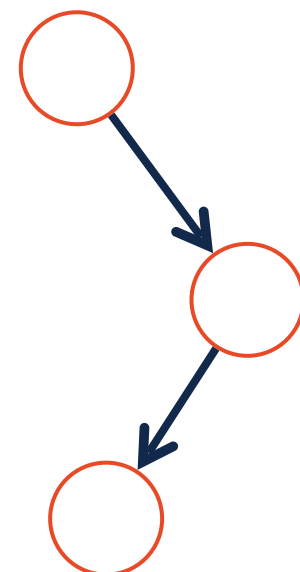

Root Balance: 2

-2

-2

2


Child Balance: 1

-1

1

-1

AVL Rotation Practice

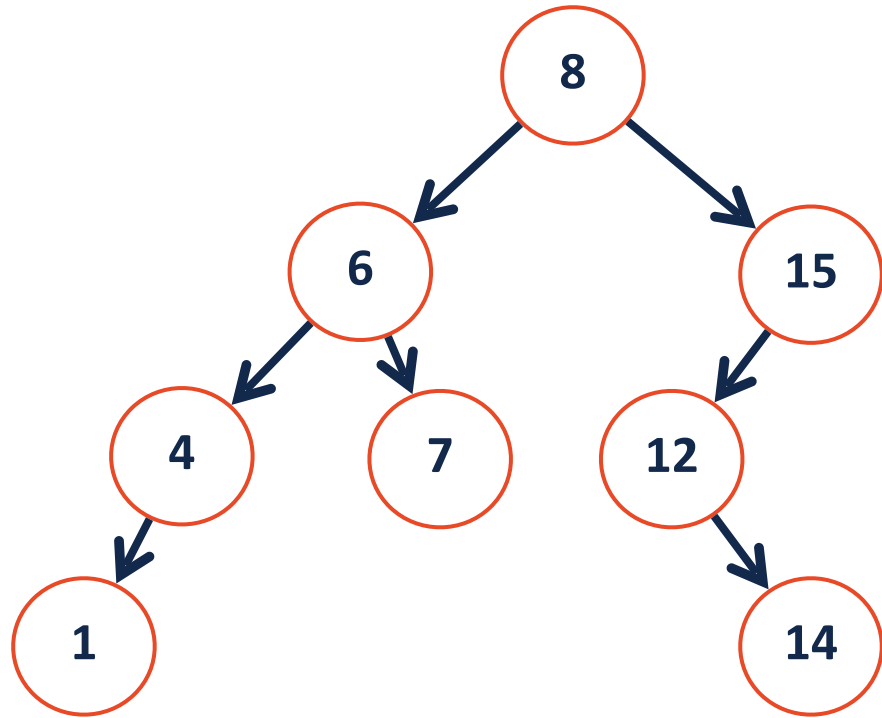

AVL vs BST ADT



The AVL tree is a modified binary search tree that rotates **when necessary**

```
1 struct TreeNode {  
2     T key;  
3     unsigned height;  
4     TreeNode *left;  
5     TreeNode *right;  
6 };
```

How does the constraint on balance affect the core functions?


Find

Insert

Remove


AVL Find

`_find(7)`

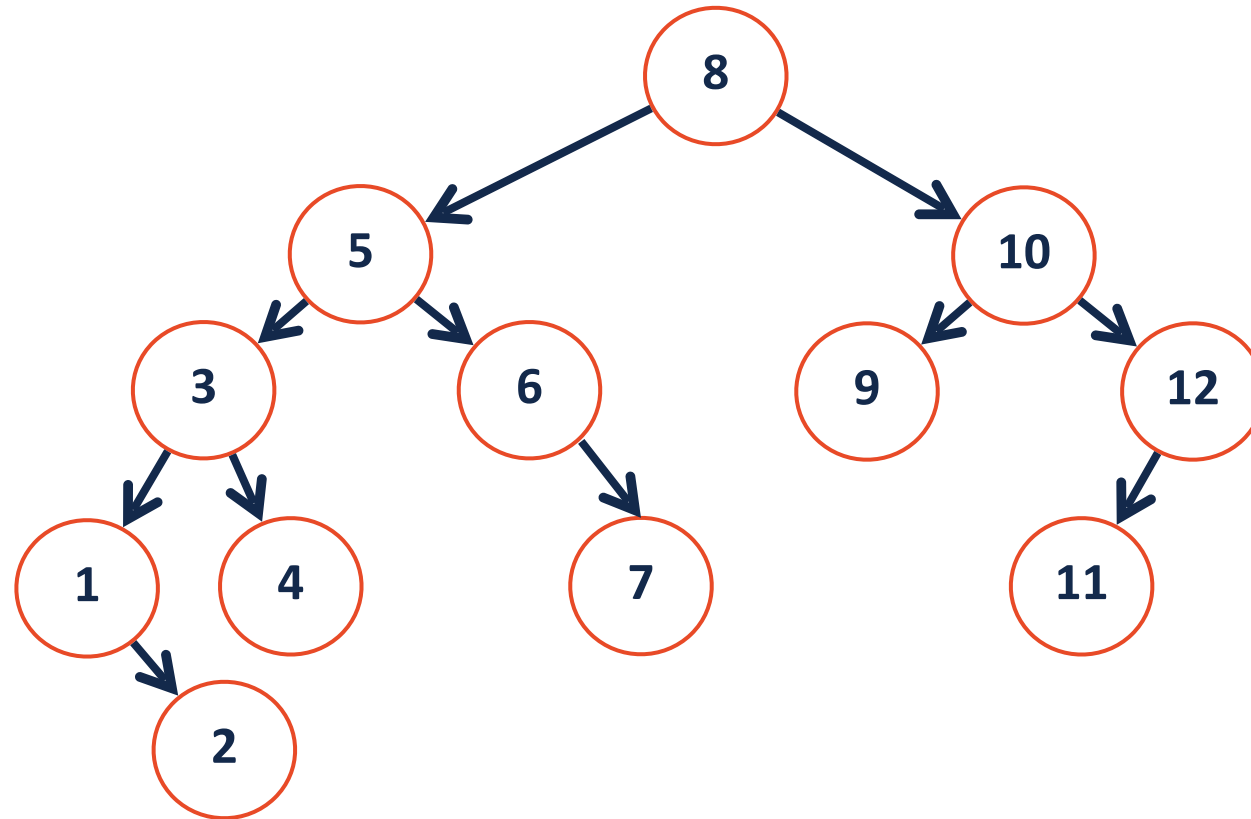

AVL Insertion

`_insert(6.5)`

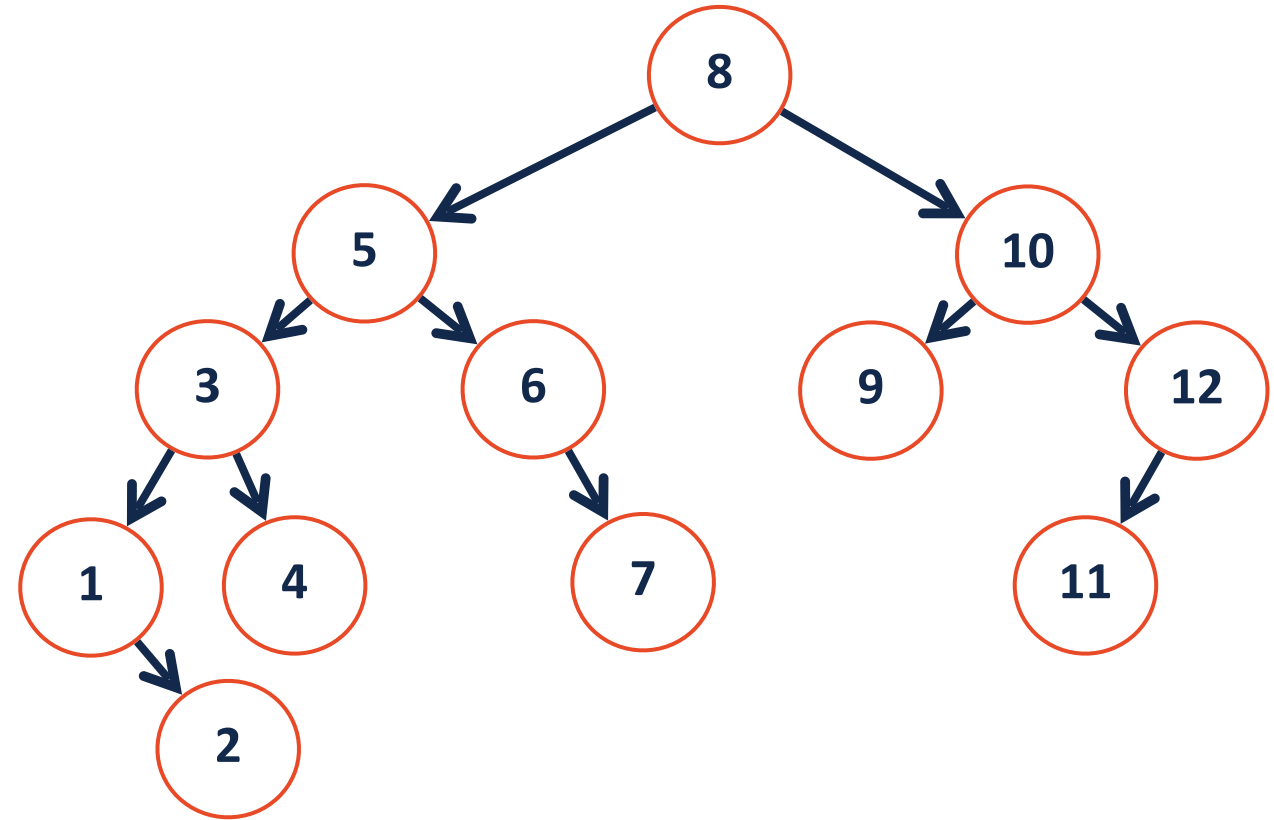


```
1 struct TreeNode {
2     T key;
3     unsigned height;
4     TreeNode *left;
5     TreeNode *right;
6 };
```

AVL Insertion

`_insert(6.5)`

Insert (recursive pseudocode):

1. Insert at proper place
2. Check for imbalance
3. Rotate, if necessary
4. Update height

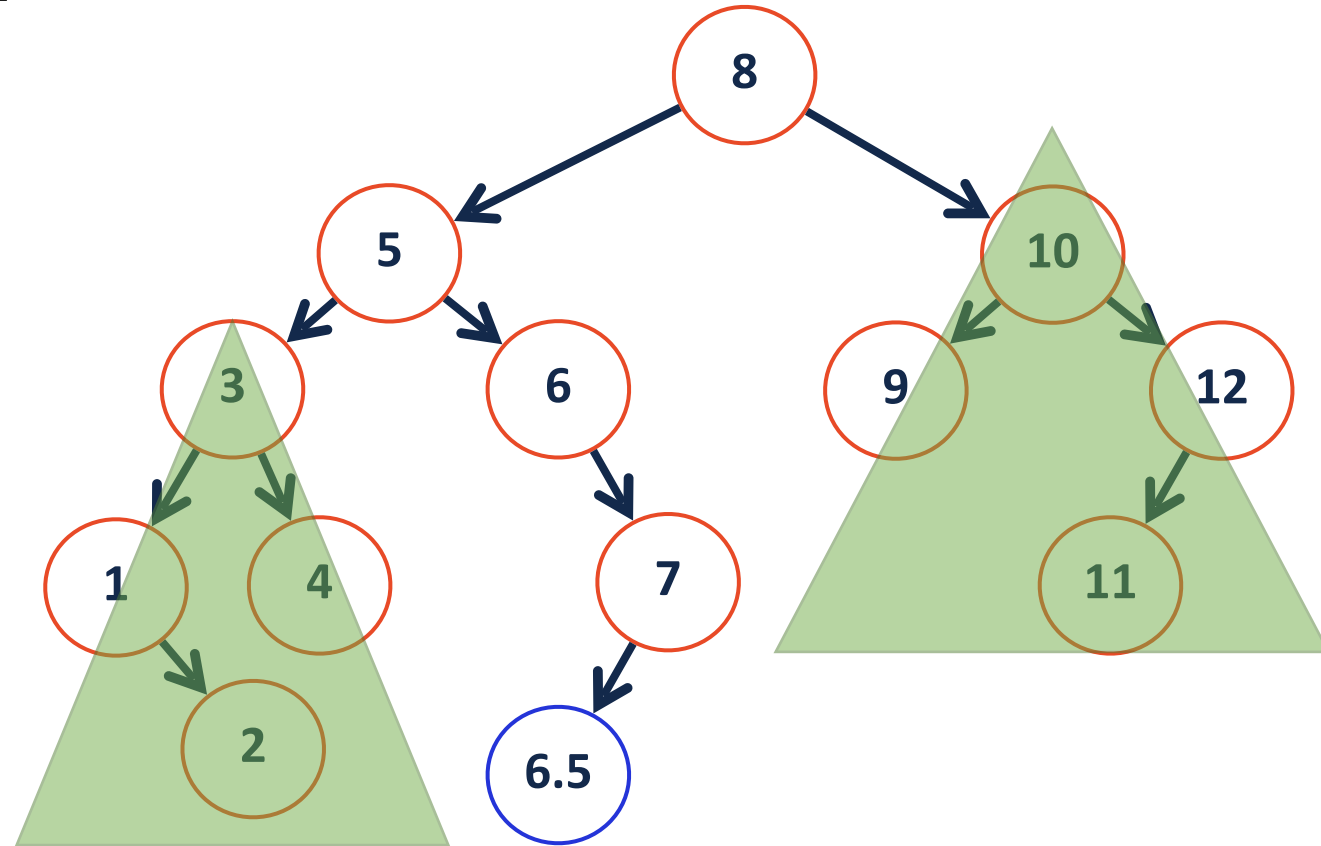

```
1 struct TreeNode {
2     T key;
3     unsigned height;
4     TreeNode *left;
5     TreeNode *right;
6 };
```

```
151 template <typename K, typename V>
152 void AVL<K, D>::_insert(const K & key, const V & data, TreeNode
*& cur) {
153     if (cur == NULL)           { cur = new TreeNode(key, data); }
157     else if (key < cur->key) { _insert( key, data, cur->left ); }
160     else if (key > cur->key) { _insert( key, data, cur->right ); }
166     _ensureBalance(cur);
167 }
```


```

119 template <typename K, typename V>
120 void AVL<K, D>::_ensureBalance(TreeNode *& cur) {
121     // Calculate the balance factor:
122     int balance = height(cur->right) - height(cur->left);
123
124     // Check if the node is current not in balance:
125     if ( balance == -2 ) {
126         int l_balance =
127             height(cur->left->right) - height(cur->left->left);
128         if ( l_balance == -1 ) { _____; }
129         else { _____; }
130     } else if ( balance == 2 ) {
131         int r_balance =
132             height(cur->right->right) - height(cur->right->left);
133         if( r_balance == 1 ) { _____; }
134         else { _____; }
135     }
136     _updateHeight(cur);
};

```



AVL Insertion

Given an AVL is balanced, insert can create **at most** one imbalance

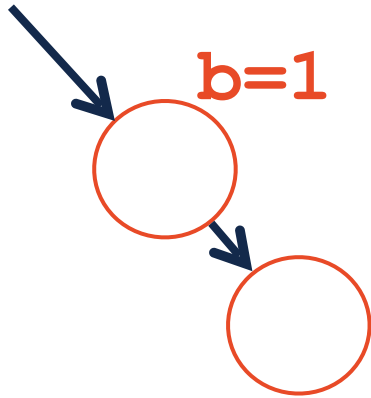


AVL Insertion

Given an AVL is balanced, insert can create **at most** one imbalance

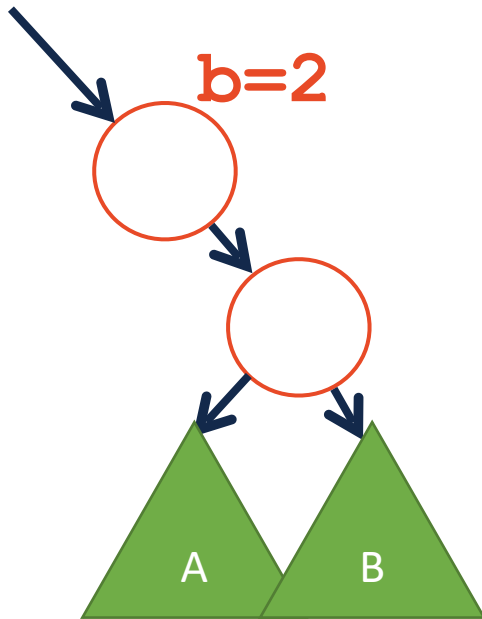



AVL Insertion

If we insert in B, I must have a balance pattern of **2, 1**

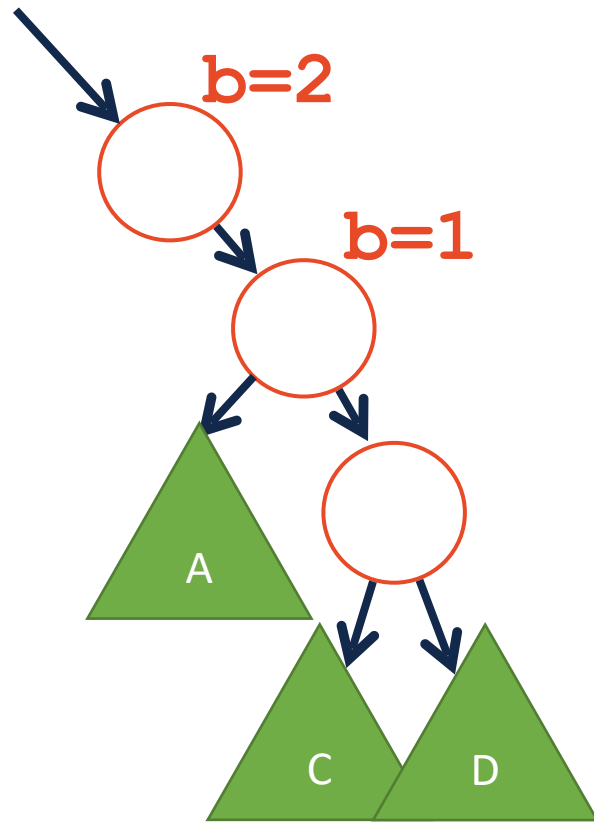

AVL Insertion


A **left** rotation fixes our imbalance in our local tree.

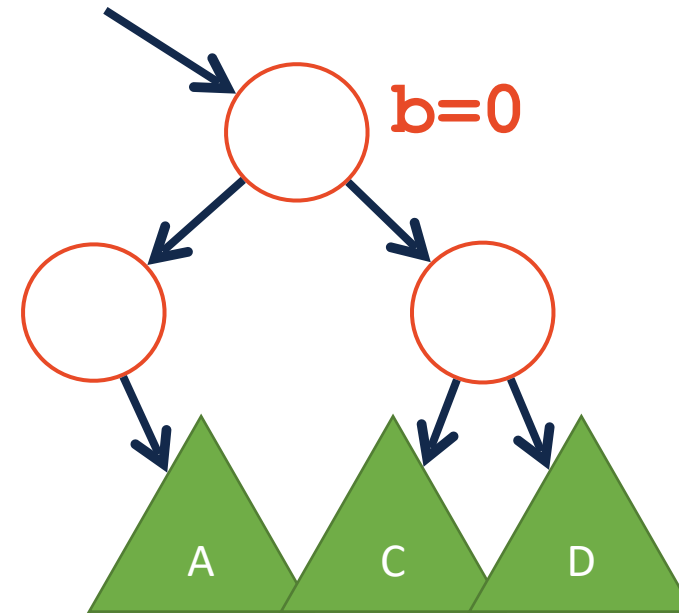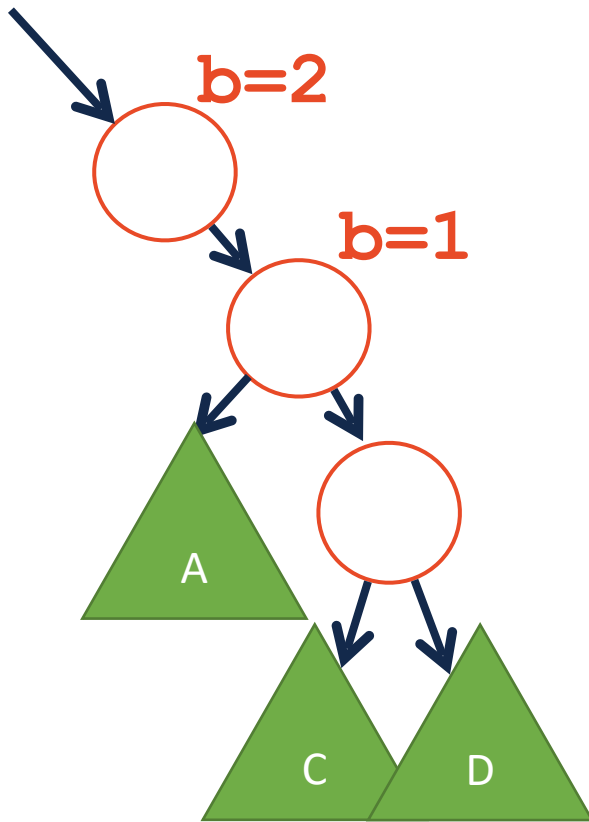

After rotation, subtree has **pre-insert height**. (Overall tree is balanced)


AVL Insertion

If we insert in A, I must have a balance pattern of **2, -1**

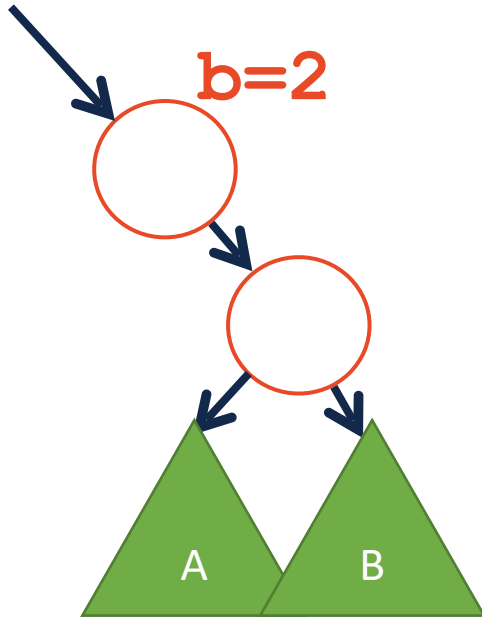



AVL Insertion

If we insert in A, I must have a balance pattern of **2, -1**

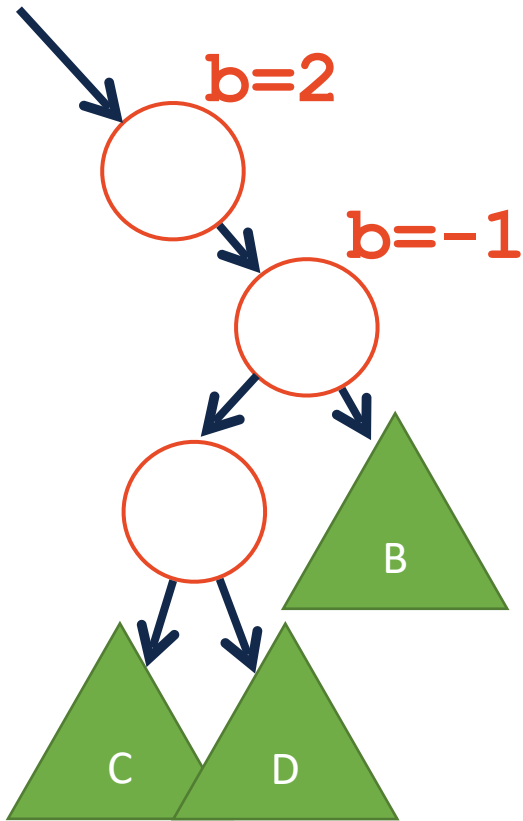


AVL Insertion

A **rightLeft** rotation fixes our imbalance in our local tree.

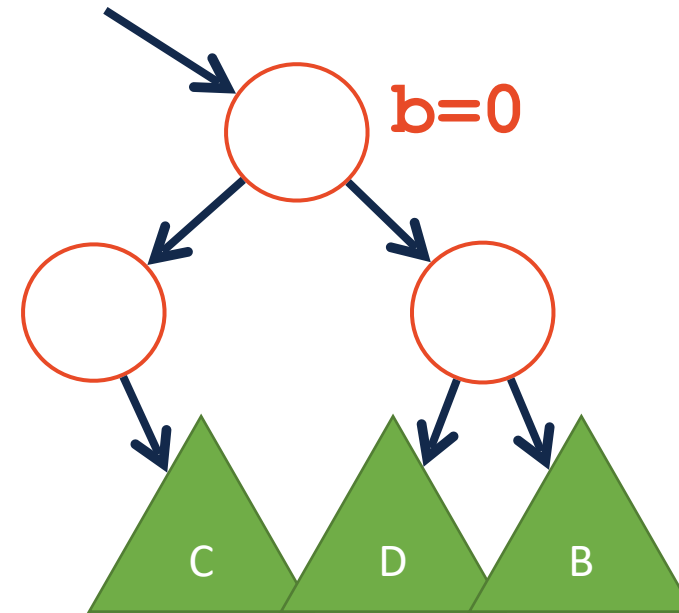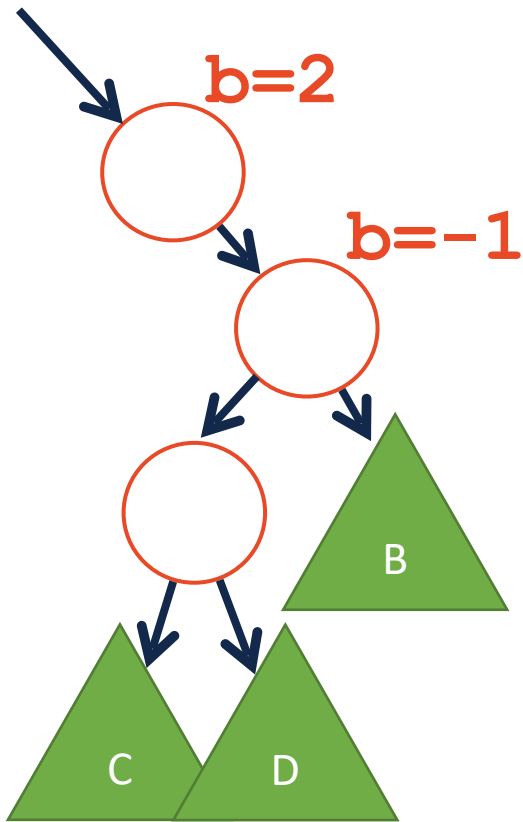

After rotation, subtree has **pre-insert height**. (Overall tree is balanced)

AVL Insertion

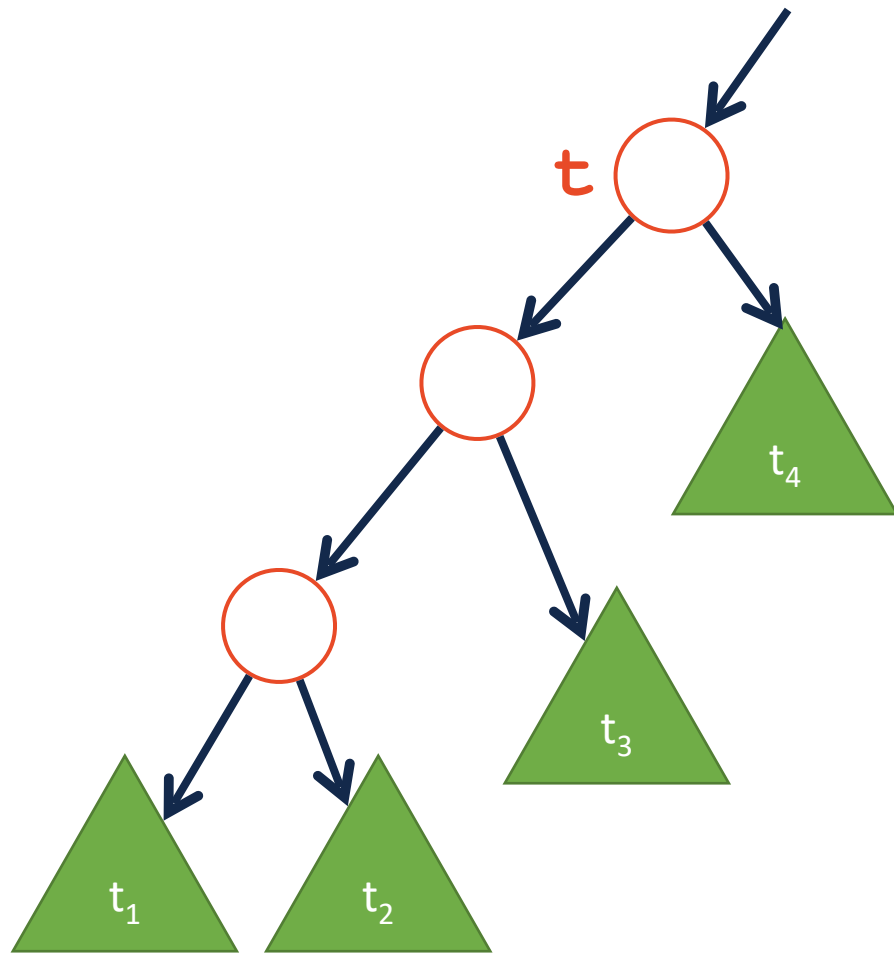


Theorem:

If an insertion occurred in subtrees t_1 or t_2 and an imbalance was first detected at t , then a _____ rotation about t restores the balance of the tree.

We gauge this by noting the balance factor of t is _____ and the balance factor of $t \rightarrow \text{left}$ is _____.

AVL Insertion

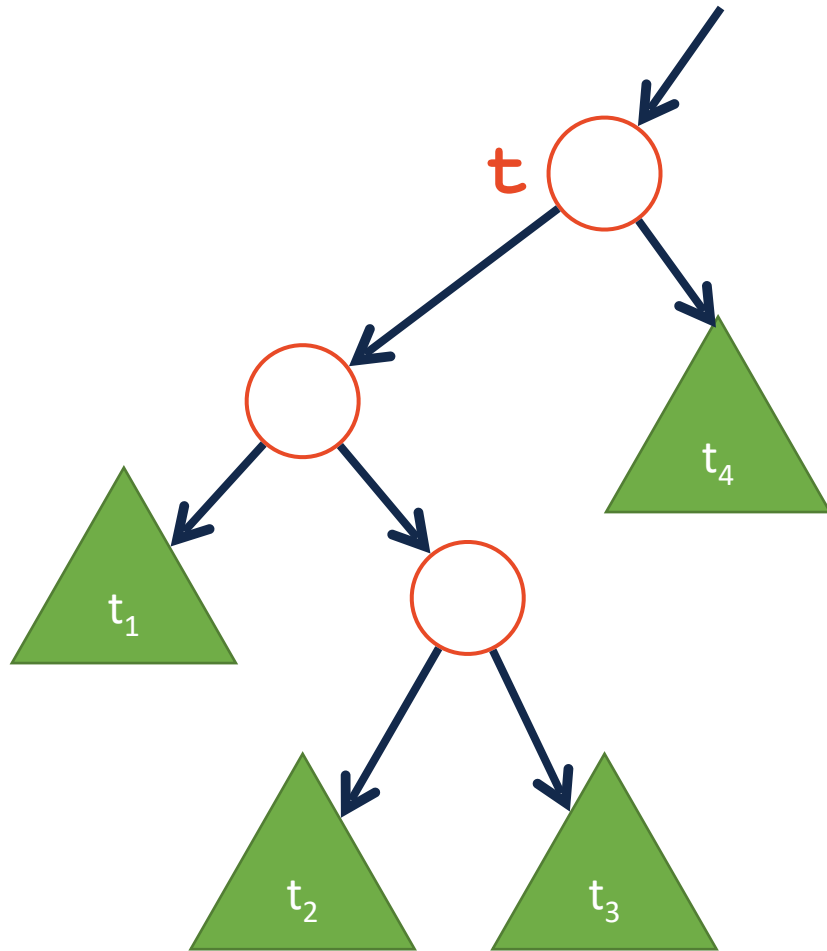

Theorem:

If an insertion occurred in subtrees t_2 or t_3 and an imbalance was first detected at t , then a _____ rotation about t restores the balance of the tree.

We gauge this by noting the balance factor of t is _____ and the balance factor of $t \rightarrow \text{left}$ is _____.



AVL Insertion

We've seen every possible insert that can cause an imbalance

Insert *may* increase height by at most:

A rotation reduces the height of the subtree by:


A single* rotation restores balance and corrects height!

What is the Big O of performing our rotation?

What is the Big O of insert?


AVL Insertion Practice

`_insert(14)`

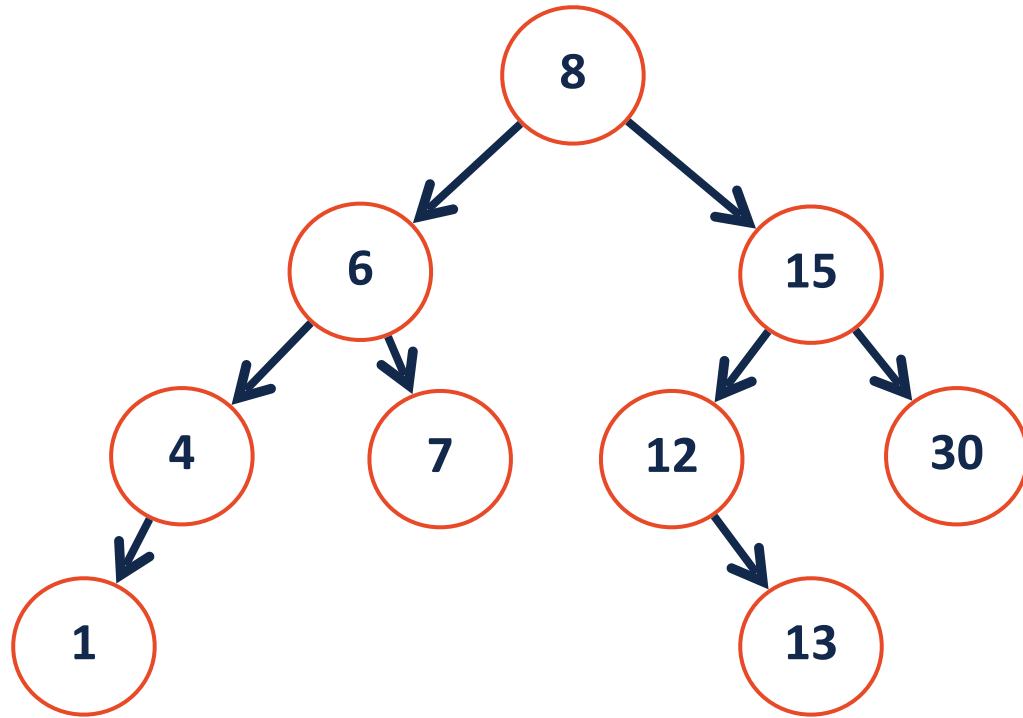


AVL Insertion Practice

`_insert(14)`

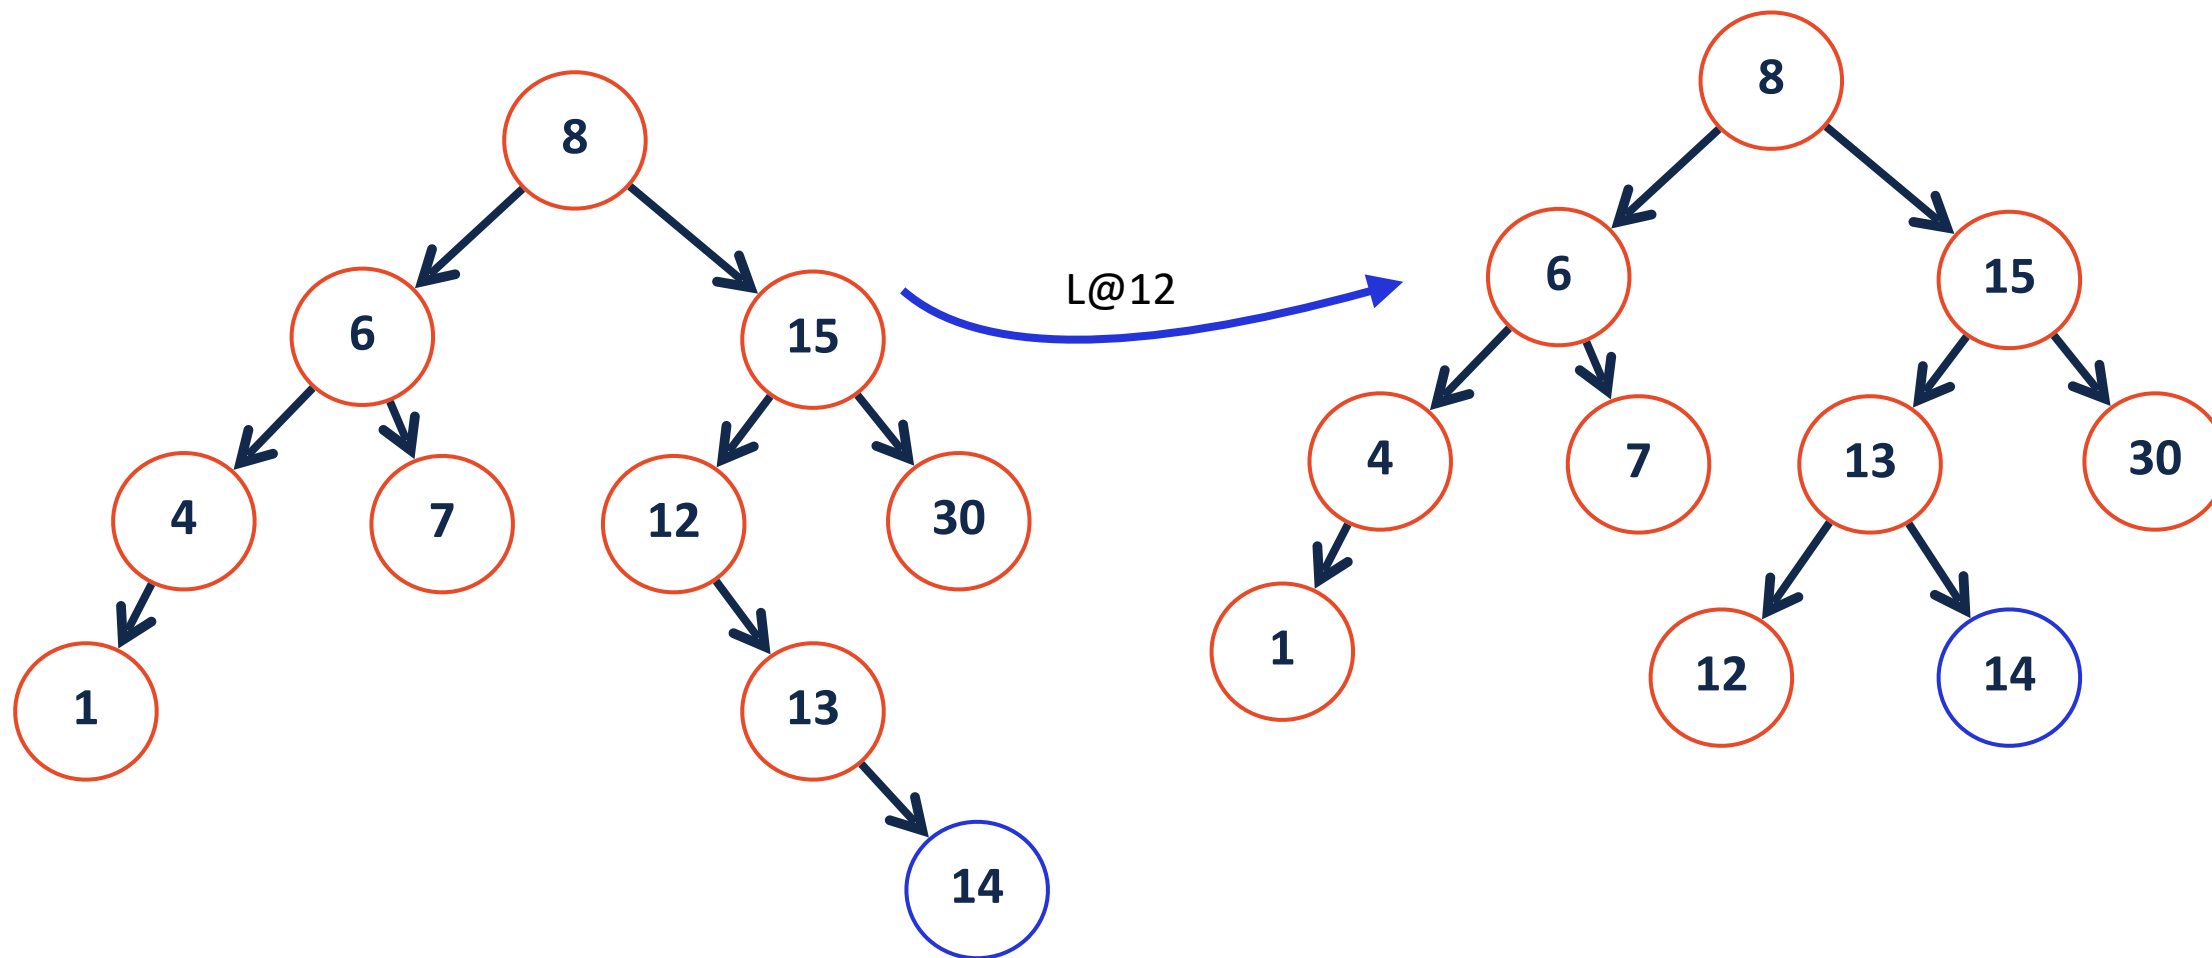


AVL Remove

`_remove(10)`

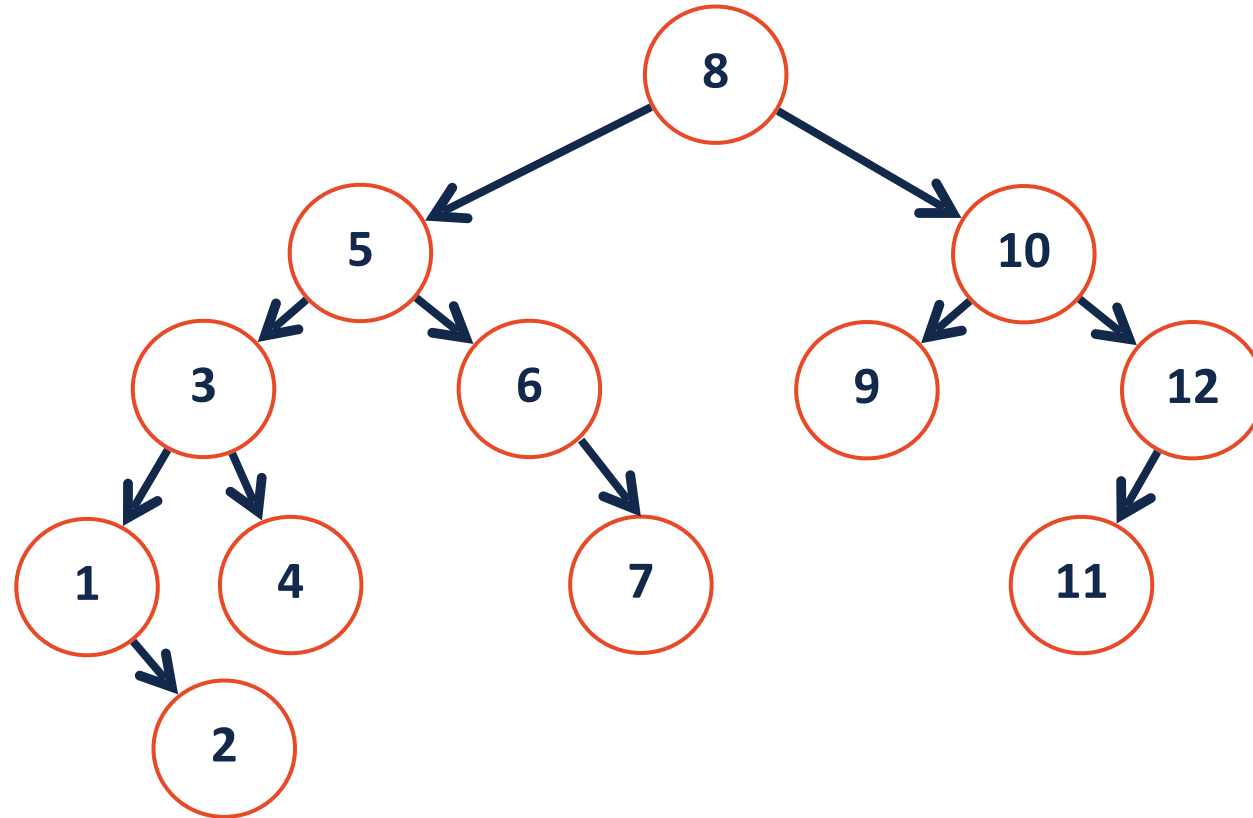


AVL Remove

`_remove(10)`

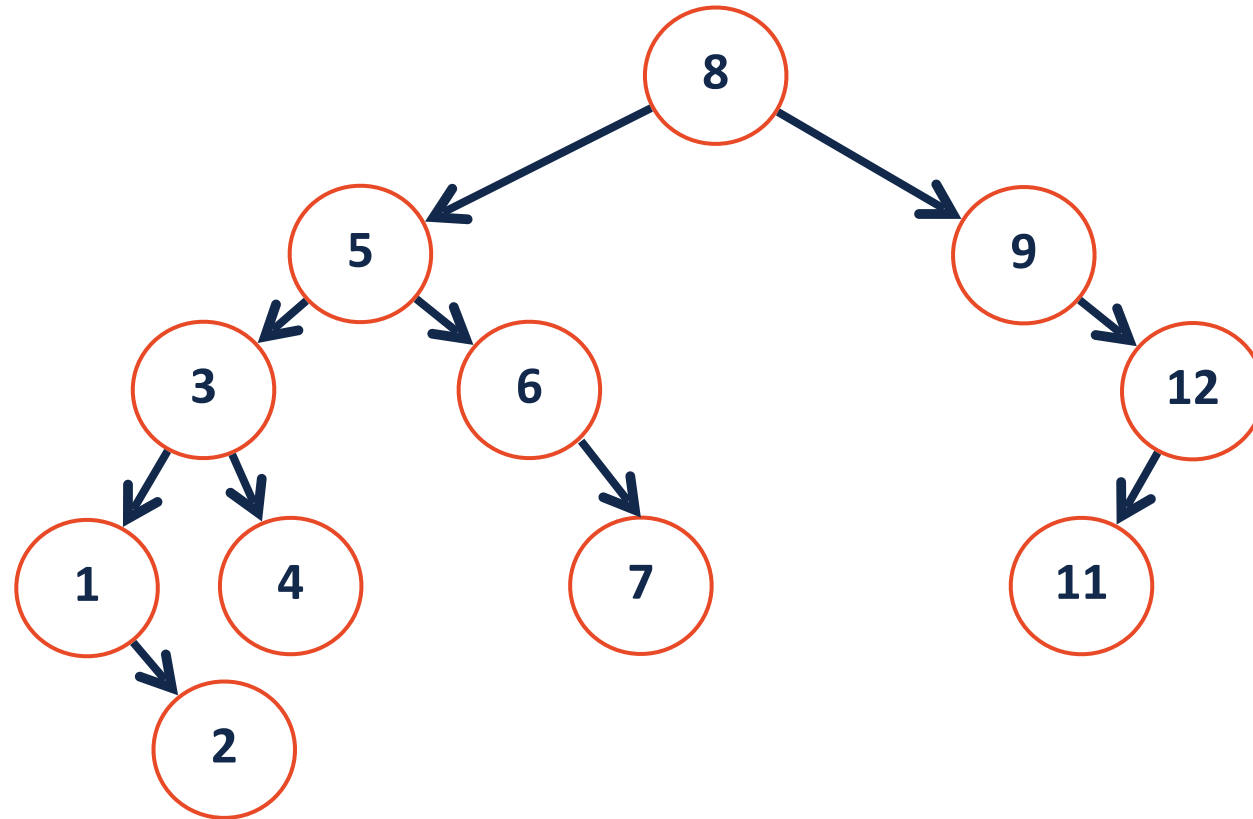


AVL Remove

`_remove(10)`

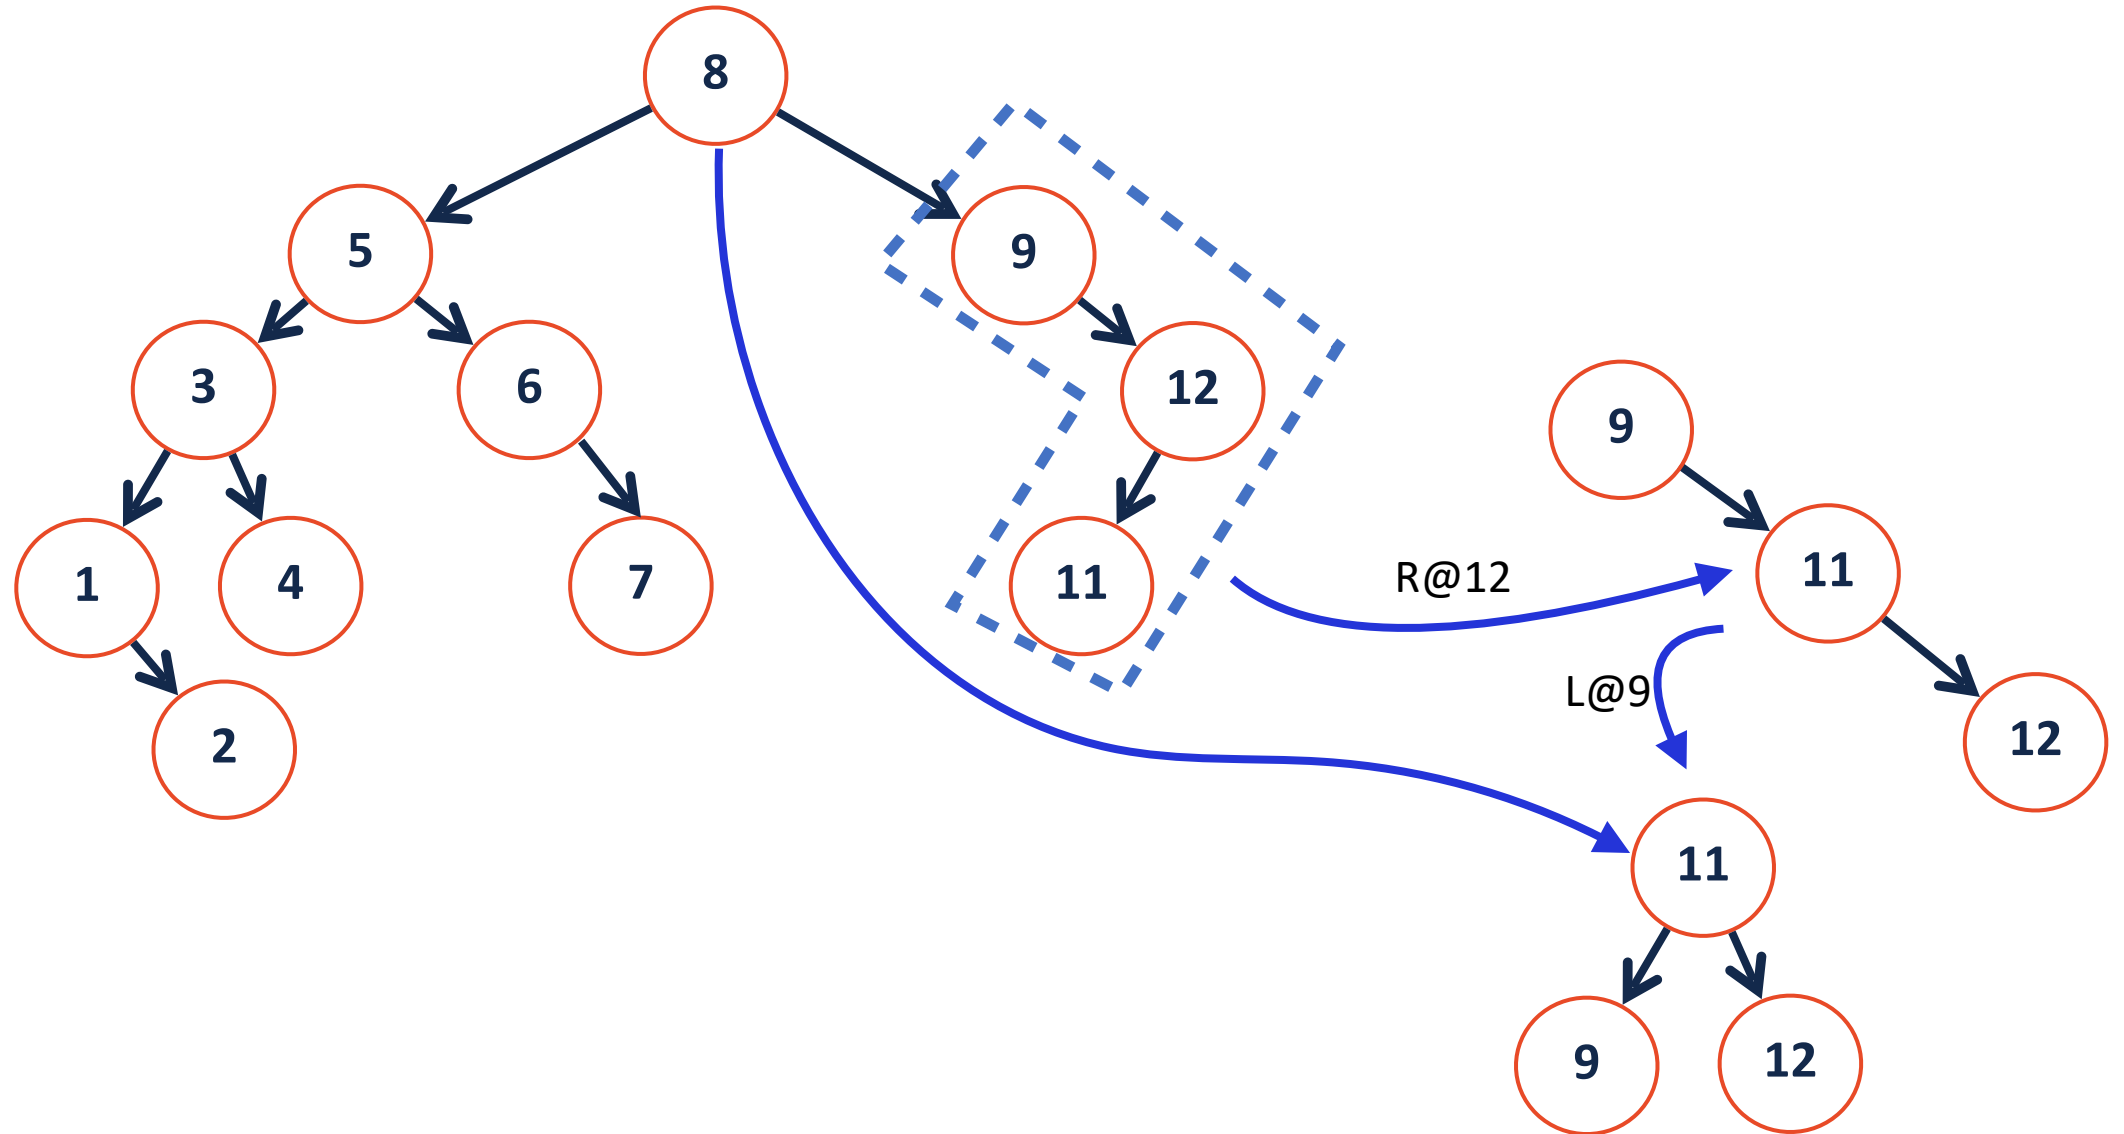


AVL Remove

`_remove(10)`

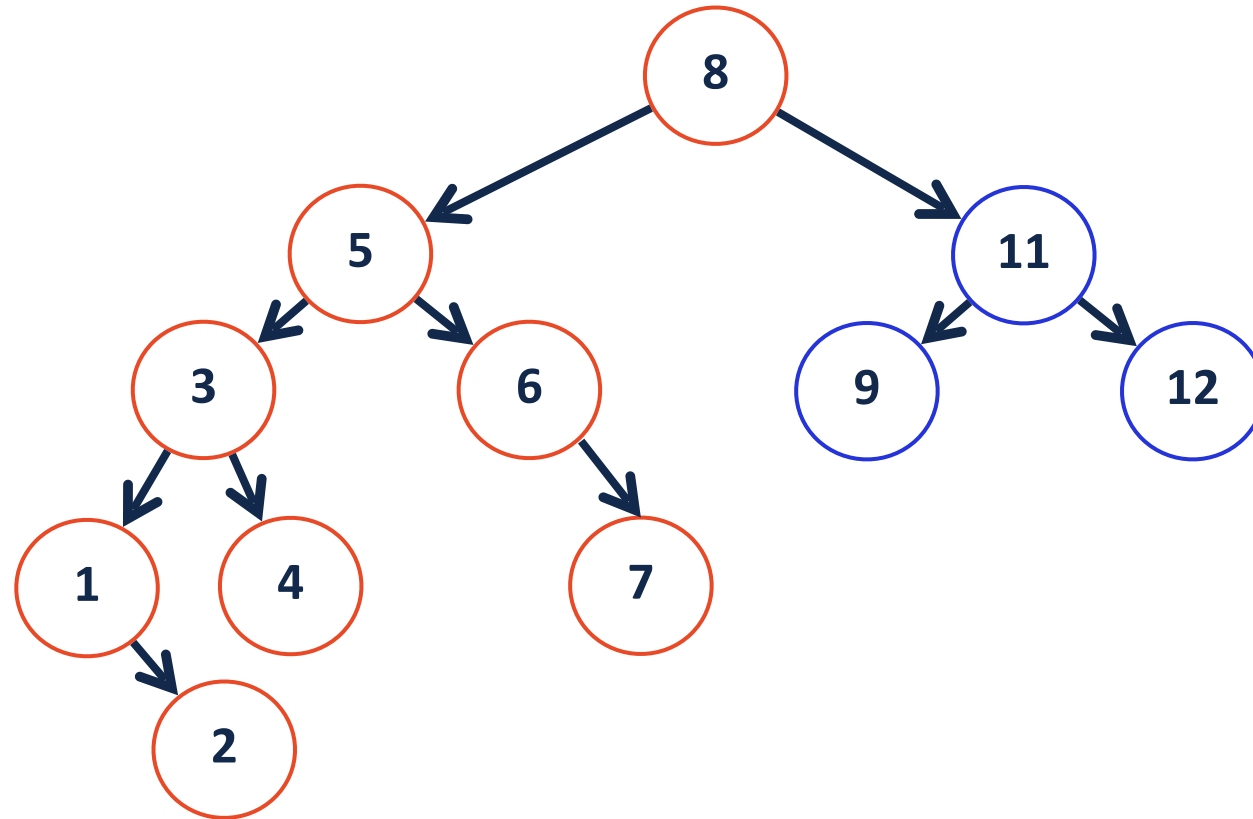




AVL Remove

`_remove(10)`

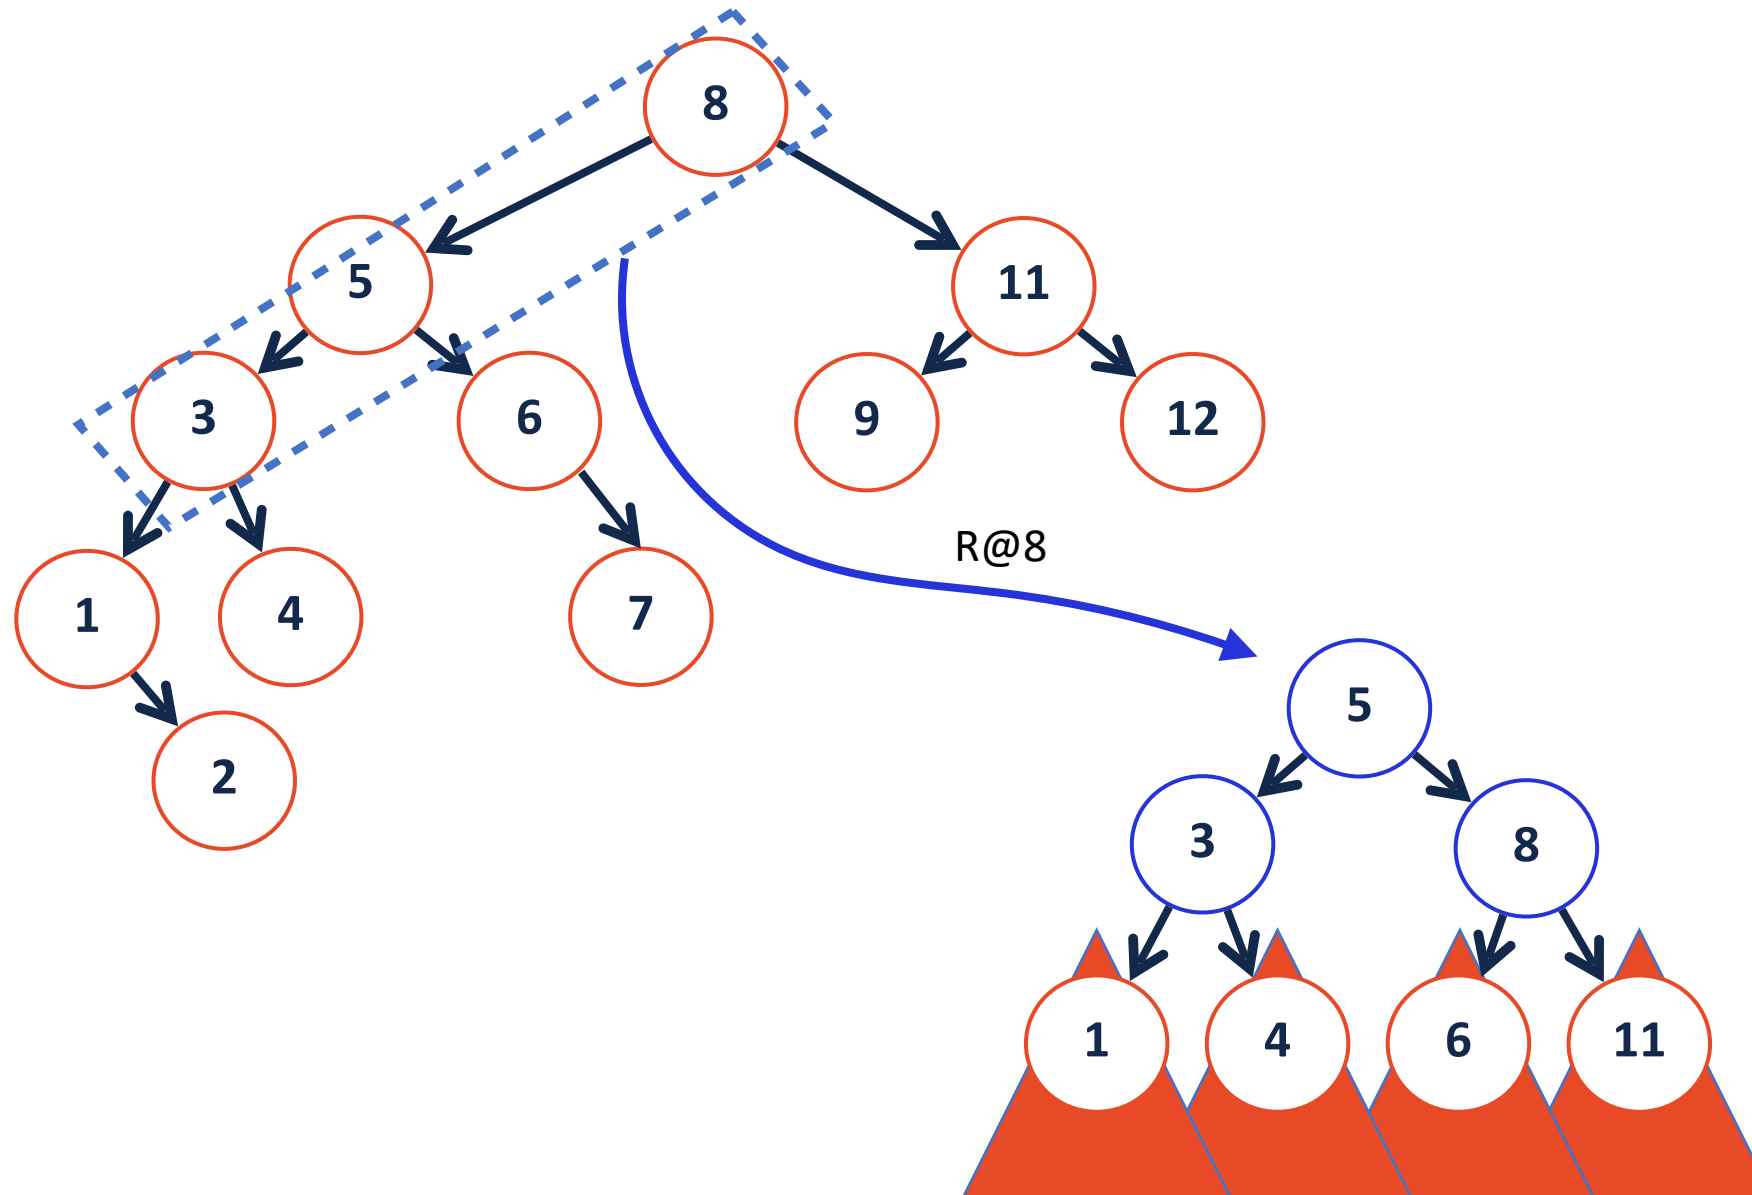


AVL Remove

`_remove(10)` 

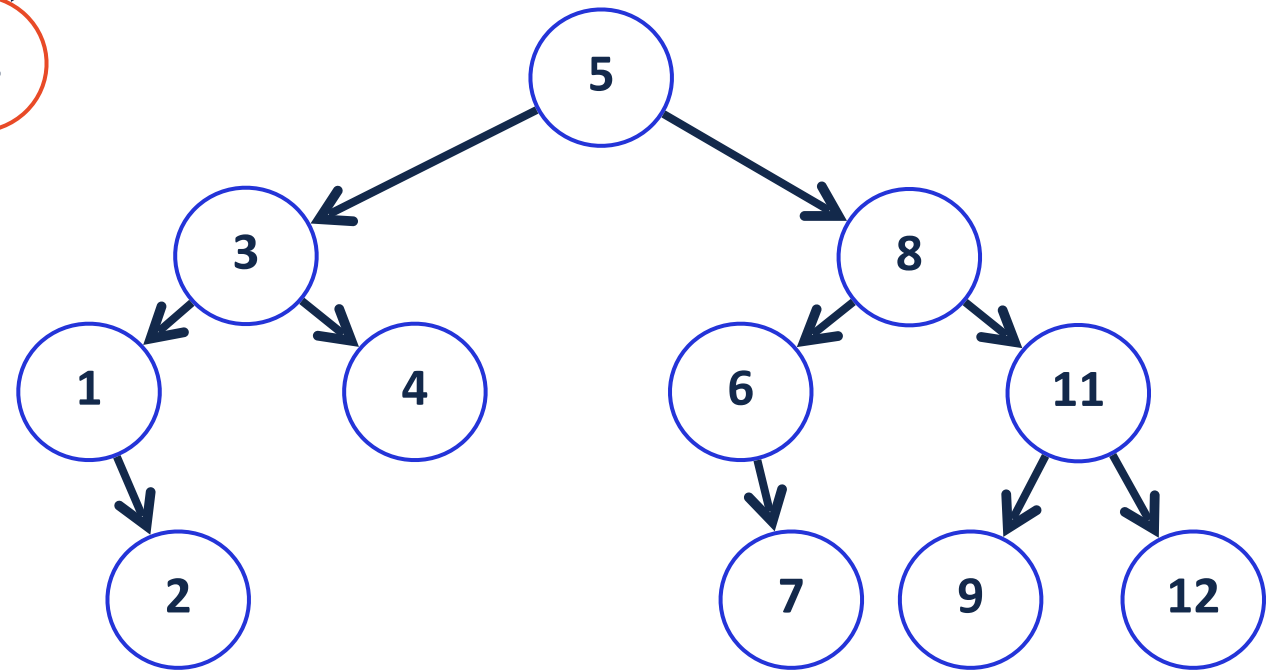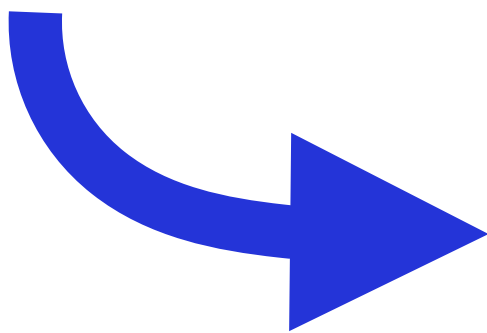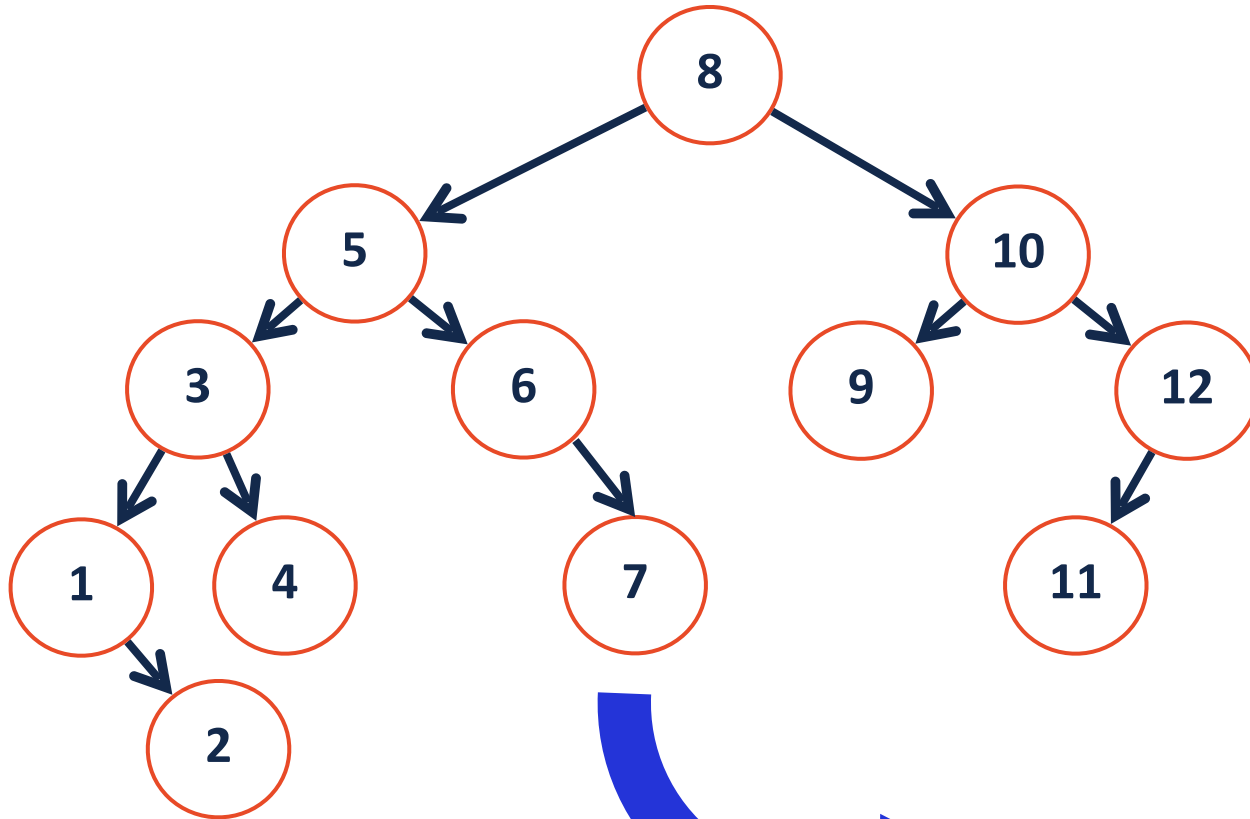

- Remove (pseudo code):**
- 1: Remove at proper place
 - 2: Check for imbalance
 - 3: Rotate, if necessary
 - 4: Update height

AVL Remove

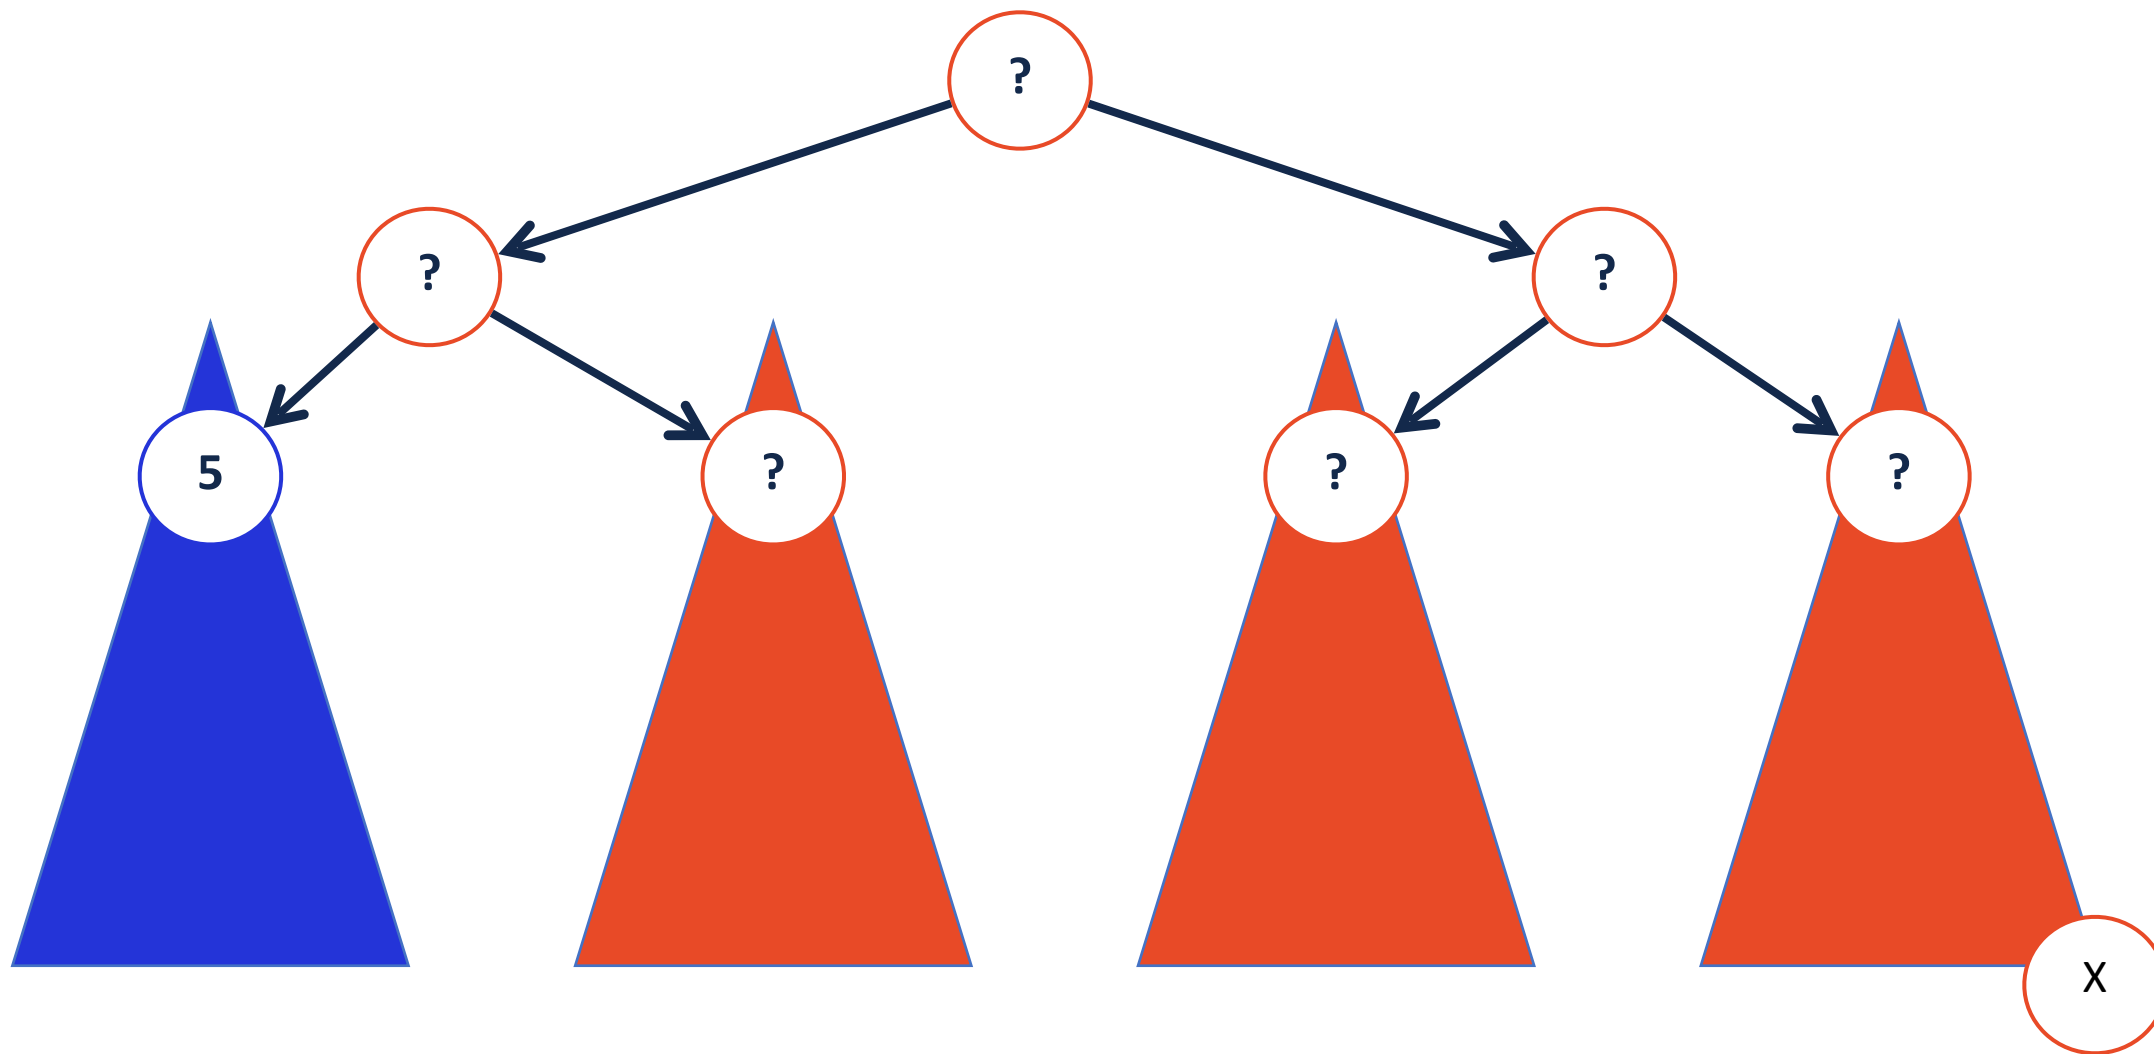

AVL Remove



An AVL remove step can reduce a subtree height by at most:

But a rotation *reduces* the height of a subtree by one!

We might have to perform a rotation at every level of the tree!

AVL Tree Analysis

For an AVL tree of height h :

Find runs in: _____.

Insert runs in: _____.

Remove runs in: _____.

Claim: The height of the AVL tree with n nodes is: _____.