

Programming Languages and Compilers (CS 421)

Elsa L Gunter
2112 SC, UIUC

<http://courses.engr.illinois.edu/cs421>

Based in part on slides by Mattox Beckman, as updated by Vikram Adve and Gul Agha

9/25/17

1

Data type in Ocaml: lists

- Frequently used lists in recursive program
- Matched over two structural cases
 - `[]` - the empty list
 - `(x :: xs)` a non-empty list
- Covers all possible lists
- `type 'a list = [] | (::) of 'a * 'a list`
 - Not quite legitimate declaration because of special syntax

9/25/17

2

Variants - Syntax (slightly simplified)


- `type name = C1 [of ty1] | ... | Cn [of tyn]`
- Introduce a type called *name*
- `(fun x -> Ci x) : ty1 -> name`
- *C_i* is called a *constructor*; if the optional type argument is omitted, it is called a *constant*
- Constructors are the basis of almost all pattern matching

9/25/17

3

Enumeration Types as Variants

An enumeration type is a collection of distinct values

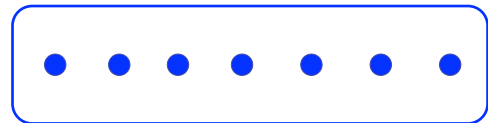

In C and Ocaml they have an order structure; order by order of input

9/25/17

4

Enumeration Types as Variants

```
# type weekday = Monday | Tuesday | Wednesday  
| Thursday | Friday | Saturday | Sunday;;
```

```
type weekday =  
  Monday  
| Tuesday  
| Wednesday  
| Thursday  
| Friday  
| Saturday  
| Sunday
```

9/25/17

5

Functions over Enumerations

```
# let day_after day = match day with  
  Monday -> Tuesday  
  | Tuesday -> Wednesday  
  | Wednesday -> Thursday  
  | Thursday -> Friday  
  | Friday -> Saturday  
  | Saturday -> Sunday  
  | Sunday -> Monday;;  
val day_after : weekday -> weekday = <fun>
```

9/25/17

6

Functions over Enumerations

```
# let rec days_later n day =  
  match n with 0 -> day  
  | _ -> if n > 0  
    then day_after (days_later (n - 1) day)  
    else days_later (n + 7) day;;  
val days_later : int -> weekday -> weekday  
= <fun>
```

9/25/17

7

Functions over Enumerations

```
# days_later 2 Tuesday;;  
- : weekday = Thursday  
# days_later (-1) Wednesday;;  
- : weekday = Tuesday  
# days_later (-4) Monday;;  
- : weekday = Thursday
```

9/25/17

8

Problem:

```
# type weekday = Monday | Tuesday |  
  Wednesday  
  | Thursday | Friday | Saturday | Sunday;;  
■ Write function is_weekend : weekday -> bool  
let is_weekend day =
```

9/25/17

9

Problem:

```
# type weekday = Monday | Tuesday |  
  Wednesday  
  | Thursday | Friday | Saturday | Sunday;;  
■ Write function is_weekend : weekday -> bool  
let is_weekend day =  
  match day with Saturday -> true  
  | Sunday -> true  
  | _ -> false
```

9/25/17

10

Example Enumeration Types


```
# type bin_op = IntPlusOp | IntMinusOp  
  | EqOp | CommaOp | ConsOp  
  
# type mon_op = HdOp | TlOp | FstOp  
  | SndOp
```

9/25/17

11

Disjoint Union Types

- Disjoint union of types, with some possibly occurring more than once

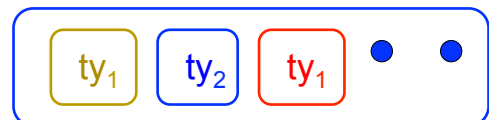

- We can also add in some new singleton elements

9/25/17

12

Disjoint Union Types

```
# type id = DriversLicense of int
| SocialSecurity of int | Name of string;;
type id = DriversLicense of int | SocialSecurity
of int | Name of string
# let check_id id = match id with
  DriversLicense num ->
    not (List.mem num [13570; 99999])
  | SocialSecurity num -> num < 900000000
  | Name str -> not (str = "John Doe");;
val check_id : id -> bool = <fun>
```

9/25/17

13

Problem

- Create a type to represent the currencies for US, UK, Europe and Japan

9/25/17

14

Problem

- Create a type to represent the currencies for US, UK, Europe and Japan

```
type currency =
  Dollar of int
  | Pound of int
  | Euro of int
  | Yen of int
```

9/25/17

15

Example Disjoint Union Type

```
# type const =
  BoolConst of bool
  | IntConst of int
  | FloatConst of float
  | StringConst of string
  | NilConst
  | UnitConst
```

9/25/17

16

Example Disjoint Union Type

```
# type const = BoolConst of bool
| IntConst of int | FloatConst of float
| StringConst of string | NilConst
| UnitConst
```

- How to represent 7 as a const?
- Answer: `IntConst 7`

9/25/17

17

Polymorphism in Variants

- The type `'a option` is gives us something to represent non-existence or failure

```
# type 'a option = Some of 'a | None;;
type 'a option = Some of 'a | None
```

- Used to encode partial functions
- Often can replace the raising of an exception

9/25/17

18

Functions producing option

```
# let rec first p list =
  match list with [ ] -> None
  | (x::xs) -> if p x then Some x else first p xs;;
val first : ('a -> bool) -> 'a list -> 'a option = <fun>
# first (fun x -> x > 3) [1;3;4;2;5];;
- : int option = Some 4
# first (fun x -> x > 5) [1;3;4;2;5];;
- : int option = None
```

9/25/17

19

Functions over option

```
# let result_ok r =
  match r with None -> false
  | Some _ -> true;;
val result_ok : 'a option -> bool = <fun>
# result_ok (first (fun x -> x > 3) [1;3;4;2;5]);;
- : bool = true
# result_ok (first (fun x -> x > 5) [1;3;4;2;5]);;
- : bool = false
```

9/25/17

20

Problem

- Write a hd and tl on lists that doesn't raise an exception and works at all types of lists.

9/25/17

21

Problem

- Write a hd and tl on lists that doesn't raise an exception and works at all types of lists.

```
let hd list =
  match list with [ ] -> None
  | (x::xs) -> Some x
let tl list =
  match list with [ ] -> None
  | (x::xs) -> Some xs
```

9/25/17

22

Mapping over Variants

```
# let optionMap f opt =
  match opt with None -> None
  | Some x -> Some (f x);;
val optionMap : ('a -> 'b) -> 'a option -> 'b option = <fun>
# optionMap
  (fun x -> x - 2)
  (first (fun x -> x > 3) [1;3;4;2;5]);;
- : int option = Some 2
```

9/25/17

23

Folding over Variants


```
# let optionFold someFun noneVal opt =
  match opt with None -> noneVal
  | Some x -> someFun x;;
val optionFold : ('a -> 'b) -> 'b -> 'a option -> 'b = <fun>
# let optionMap f opt =
  optionFold (fun x -> Some (f x)) None opt;;
val optionMap : ('a -> 'b) -> 'a option -> 'b option = <fun>
```

9/25/17

24

Recursive Types

- The type being defined may be a component of itself

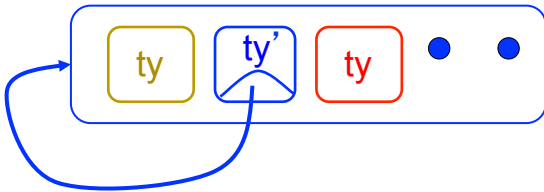

9/25/17

25

Recursive Data Types

```
# type int_Bin_Tree =  
Leaf of int | Node of (int_Bin_Tree *  
int_Bin_Tree);;
```

```
type int_Bin_Tree = Leaf of int | Node of  
(int_Bin_Tree * int_Bin_Tree)
```

9/25/17

26

Recursive Data Type Values


```
# let bin_tree =  
Node(Node(Leaf 3, Leaf 6), Leaf (-7));;
```

```
val bin_tree : int_Bin_Tree = Node (Node  
(Leaf 3, Leaf 6), Leaf (-7))
```

9/25/17

27

Recursive Data Type Values

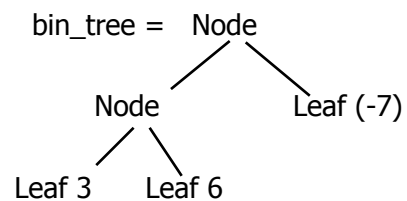

9/25/17

28

Recursive Data Types

```
# type exp =  
  VarExp of string  
  | ConstExp of const  
  | MonOpAppExp of mon_op * exp  
  | BinOpAppExp of bin_op * exp * exp  
  | IfExp of exp * exp * exp  
  | AppExp of exp * exp  
  | FunExp of string * exp
```

9/25/17

29

Recursive Data Types

```
# type bin_op = IntPlusOp | IntMinusOp  
  | EqOp | CommaOp | ConsOp | ...  
# type const = BoolConst of bool | IntConst of int | ...  
# type exp = VarExp of string | ConstExp of const  
  | BinOpAppExp of bin_op * exp * exp | ...
```

- How to represent 6 as an exp?

9/25/17

30

Recursive Data Types

```
# type bin_op = IntPlusOp | IntMinusOp
  | EqOp | CommaOp | ConsOp | ...
# type const = BoolConst of bool | IntConst of int |
...
# type exp = VarExp of string | ConstExp of const
  | BinOpAppExp of bin_op * exp * exp | ...
```

- How to represent 6 as an exp?
- Answer: ConstExp (IntConst 6)

9/25/17

31

Recursive Data Types

```
# type bin_op = IntPlusOp | IntMinusOp
  | EqOp | CommaOp | ConsOp | ...
# type const = BoolConst of bool | IntConst of int |
...
# type exp = VarExp of string | ConstExp of const
  | BinOpAppExp of bin_op * exp * exp | ...
```

- How to represent (6, 3) as an exp?

9/25/17

32

Recursive Data Types

```
# type bin_op = IntPlusOp | IntMinusOp
  | EqOp | CommaOp | ConsOp | ...
# type const = BoolConst of bool | IntConst of int |
...
# type exp = VarExp of string | ConstExp of const
  | BinOpAppExp of bin_op * exp * exp | ...
```

- How to represent (6, 3) as an exp?
- BinOpAppExp (CommaOp, ConstExp (IntConst 6), ConstExp (IntConst 3))

9/25/17

33

Recursive Data Types

```
# type bin_op = IntPlusOp | IntMinusOp
  | EqOp | CommaOp | ConsOp | ...
# type const = BoolConst of bool | IntConst of int |
...
# type exp = VarExp of string | ConstExp of const
  | BinOpAppExp of bin_op * exp * exp | ...
```

- How to represent [(6, 3)] as an exp?
- BinOpAppExp (ConsOp, BinOpAppExp (CommaOp, ConstExp (IntConst 6), ConstExp (IntConst 3)), ConstExp NilConst))));

9/25/17

34

Recursive Functions

```
# let rec first_leaf_value tree =
  match tree with (Leaf n) -> n
  | Node (left_tree, right_tree) ->
    first_leaf_value left_tree;;
val first_leaf_value : int_Bin_Tree -> int =
  <fun>
# let left = first_leaf_value bin_tree;;
val left : int = 3
```

9/25/17

35

Problem

```
type int_Bin_Tree = Leaf of int
  | Node of (int_Bin_Tree * int_Bin_Tree);;
■ Write sum_tree : int_Bin_Tree -> int
■ Adds all ints in tree
let rec sum_tree t =
```

9/25/17

36

Problem

```
type int_Bin_Tree = Leaf of int
| Node of (int_Bin_Tree * int_Bin_Tree);;
■ Write sum_tree : int_Bin_Tree -> int
■ Adds all ints in tree
let rec sum_tree t =
  match t with Leaf n -> n
  | Node(t1,t2) -> sum_tree t1 + sum_tree t2
```

9/25/17

37

Recursion over Recursive Data Types

```
# type exp = VarExp of string | ConstExp of const
| BinOpAppExp of bin_op * exp * exp
| FunExp of string * exp | AppExp of exp * exp

■ How to count the number of variables in an exp?
```

9/25/17

38

Recursion over Recursive Data Types

```
# type exp = VarExp of string | ConstExp of const
| BinOpAppExp of bin_op * exp * exp
| FunExp of string * exp | AppExp of exp * exp

■ How to count the number of variables in an exp?
# let rec varCnt exp =
  match exp with VarExp x ->
  | ConstExp c ->
  | BinOpAppExp (b, e1, e2) ->
  | FunExp (x,e) ->
  | AppExp (e1, e2) ->
```

9/25/17

39

Recursion over Recursive Data Types

```
# type exp = VarExp of string | ConstExp of const
| BinOpAppExp of bin_op * exp * exp
| FunExp of string * exp | AppExp of exp * exp

■ How to count the number of variables in an exp?
# let rec varCnt exp =
  match exp with VarExp x -> 1
  | ConstExp c -> 0
  | BinOpAppExp (b, e1, e2) -> varCnt e1 + varCnt e2
  | FunExp (x,e) -> 1 + varCnt e
  | AppExp (e1, e2) -> varCnt e1 + varCnt e2
```

9/25/17

40

Your turn now

Try Problem 3 on MP3

9/25/17

41

Mapping over Recursive Types

```
# let rec ibtreeMap f tree =
  match tree with (Leaf n) -> Leaf (f n)
  | Node (left_tree, right_tree) ->
  Node (ibtreeMap f left_tree,
        ibtreeMap f right_tree);;
val ibtreeMap : (int -> int) -> int_Bin_Tree ->
int_Bin_Tree = <fun>
```

9/25/17

42

Mapping over Recursive Types

```
# ibtreeMap ((+) 2) bin_tree;;  
  
- : int_Bin_Tree = Node (Node (Leaf 5, Leaf  
8), Leaf (-5))
```

9/25/17

43

Folding over Recursive Types

```
# let rec ibtreeFoldRight leafFun nodeFun tree =  
  match tree with Leaf n -> leafFun n  
  | Node (left_tree, right_tree) ->  
    nodeFun  
    (ibtreeFoldRight leafFun nodeFun left_tree)  
    (ibtreeFoldRight leafFun nodeFun right_tree);;  
val ibtreeFoldRight : (int -> 'a) -> ('a -> 'a -> 'a) ->  
int_Bin_Tree -> 'a = <fun>
```

9/25/17

44

Folding over Recursive Types

```
# let tree_sum =  
  ibtreeFoldRight (fun x -> x) (+);;  
val tree_sum : int_Bin_Tree -> int = <fun>  
# tree_sum bin_tree;;  
- : int = 2
```

9/25/17

45

Mutually Recursive Types

```
# type 'a tree = TreeLeaf of 'a  
  | TreeNode of 'a treeList  
and 'a treeList = Last of 'a tree  
  | More of ('a tree * 'a treeList);;  
type 'a tree = TreeLeaf of 'a | TreeNode of 'a  
treeList  
and 'a treeList = Last of 'a tree | More of ('a  
tree * 'a treeList)
```

9/25/17

46

Mutually Recursive Types - Values

```
# let tree =  
  TreeNode  
  (More (TreeLeaf 5,  
    (More (TreeNode  
      (More (TreeLeaf 3,  
        Last (TreeLeaf 2))),  
      Last (TreeLeaf 7)))))
```

9/25/17

47


Mutually Recursive Types - Values

```
val tree : int tree =  
  TreeNode  
  (More  
  (TreeLeaf 5,  
  More  
  (TreeNode (More (TreeLeaf 3, Last  
(TreeLeaf 2))), Last (TreeLeaf 7))))
```

9/25/17

48

Mutually Recursive Types - Values

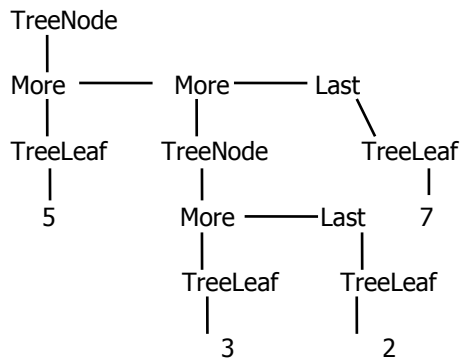


9/25/17

49

Mutually Recursive Types - Values

A more conventional picture

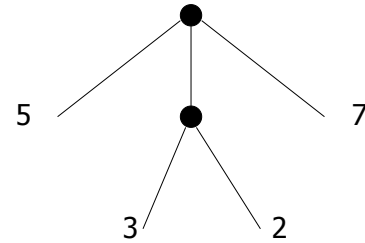

9/25/17

50

Mutually Recursive Functions

```
# let rec fringe tree =
  match tree with (TreeLeaf x) -> [x]
  | (TreeNode list) -> list_fringe list
and list_fringe tree_list =
  match tree_list with (Last tree) -> fringe tree
  | (More (tree,list)) ->
    (fringe tree) @ (list_fringe list);;
```

```
val fringe : 'a tree -> 'a list = <fun>
val list_fringe : 'a treeList -> 'a list = <fun>
```

9/25/17

51

Mutually Recursive Functions

```
# fringe tree;;
- : int list = [5; 3; 2; 7]
```

9/25/17

52

Problem

```
# type 'a tree = TreeLeaf of 'a | TreeNode of 'a treeList
and 'a treeList = Last of 'a tree | More of ('a tree * 'a treeList);;
Define tree_size
```

9/25/17

53

Problem

```
# type 'a tree = TreeLeaf of 'a | TreeNode of 'a treeList
and 'a treeList = Last of 'a tree | More of ('a tree * 'a treeList);;
Define tree_size
let rec tree_size t =
  match t with TreeLeaf _ ->
  | TreeNode ts ->
```

9/25/17

54

Problem

```
# type 'a tree = TreeLeaf of 'a | TreeNode of 'a treeList
and 'a treeList = Last of 'a tree | More of ('a tree * 'a treeList);;
Define tree_size
let rec tree_size t =
  match t with TreeLeaf _ -> 1
  | TreeNode ts -> treeList_size ts
```

9/25/17

55

Problem

```
# type 'a tree = TreeLeaf of 'a | TreeNode of 'a treeList
and 'a treeList = Last of 'a tree | More of ('a tree * 'a treeList);;
Define tree_size and treeList_size
let rec tree_size t =
  match t with TreeLeaf _ -> 1
  | TreeNode ts -> treeList_size ts
and treeList_size ts =
```

9/25/17

56

Problem

```
# type 'a tree = TreeLeaf of 'a | TreeNode of 'a treeList
and 'a treeList = Last of 'a tree | More of ('a tree * 'a treeList);;
Define tree_size and treeList_size
let rec tree_size t =
  match t with TreeLeaf _ -> 1
  | TreeNode ts -> treeList_size ts
and treeList_size ts =
  match ts with Last t ->
  | More t ts' ->
```

9/25/17

57

Problem

```
# type 'a tree = TreeLeaf of 'a | TreeNode of 'a treeList
and 'a treeList = Last of 'a tree | More of ('a tree * 'a treeList);;
Define tree_size and treeList_size
let rec tree_size t =
  match t with TreeLeaf _ -> 1
  | TreeNode ts -> treeList_size ts
and treeList_size ts =
  match ts with Last t -> tree_size t
  | More t ts' -> tree_size t + treeList_size ts'
```

9/25/17

58

Problem

```
# type 'a tree = TreeLeaf of 'a | TreeNode of 'a treeList
and 'a treeList = Last of 'a tree | More of ('a tree * 'a treeList);;
Define tree_size and treeList_size
let rec tree_size t =
  match t with TreeLeaf _ -> 1
  | TreeNode ts -> treeList_size ts
and treeList_size ts =
  match ts with Last t -> tree_size t
  | More t ts' -> tree_size t + treeList_size ts'
```

9/25/17

59

Nested Recursive Types

```
# type 'a labeled_tree =
  TreeNode of ('a * 'a labeled_tree
  list);;
type 'a labeled_tree = TreeNode of ('a
  * 'a labeled_tree list)
```

9/25/17

60

Nested Recursive Type Values

```
# let ltree =  
  TreeNode(5,  
    [TreeNode (3, []);  
      TreeNode (2, [TreeNode (1, []);  
                        TreeNode (7, [])]);  
    TreeNode (5, [])];;
```

9/25/17

61

Nested Recursive Type Values


```
val ltree : int labeled_tree =  
  TreeNode  
    (5,  
    [TreeNode (3, []); TreeNode (2,  
    [TreeNode (1, []); TreeNode (7, [])]);  
    TreeNode (5, [])];
```

9/25/17

62

Nested Recursive Type Values


```
Ltree = TreeNode(5)
```

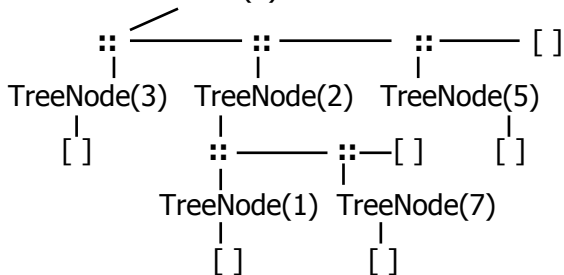

9/25/17

63

Nested Recursive Type Values



9/25/17

64

Mutually Recursive Functions

```
# let rec flatten_tree labtree =  
  match labtree with TreeNode (x,treelist)  
  -> x::flatten_tree_list treelist  
  and flatten_tree_list treelist =  
  match treelist with [] -> []  
  | labtree::labtrees  
  -> flatten_tree labtree  
    @ flatten_tree_list labtrees;;
```

9/25/17

65

Mutually Recursive Functions

```
val flatten_tree : 'a labeled_tree -> 'a list =  
  <fun>  
val flatten_tree_list : 'a labeled_tree list -> 'a  
  list = <fun>  
# flatten_tree ltree;;  
- : int list = [5; 3; 2; 1; 7; 5]
```

- Nested recursive types lead to mutually recursive functions

9/25/17

66

Infinite Recursive Values

```
# let rec ones = 1::ones;;
val ones : int list =
  [1; 1; 1; 1; ...]
# match ones with x::_ -> x;;
Characters 0-25:
Warning: this pattern-matching is not exhaustive.
Here is an example of a value that is not matched:
[]
match ones with x::_ -> x;;
^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
- : int = 1
```

9/25/17

67

Infinite Recursive Values

```
# let rec lab_tree = TreeNode(2, tree_list)
  and tree_list = [lab_tree; lab_tree];;
val lab_tree : int labeled_tree =
  TreeNode (2, [TreeNode(...); TreeNode(...)])
val tree_list : int labeled_tree list =
  [TreeNode (2, [TreeNode(...);
  TreeNode(...)]);
  TreeNode (2, [TreeNode(...);
  TreeNode(...)])]
```

9/25/17

68

Infinite Recursive Values

```
# match lab_tree
  with TreeNode (x, _) -> x;;
- : int = 2
```

9/25/17

69

Records

- Records serve the same programming purpose as tuples
- Provide better documentation, more readable code
- Allow components to be accessed by label instead of position
 - Labels (aka *field names*) must be unique
 - Fields accessed by suffix dot notation

9/25/17

70

Record Types

- Record types must be declared before they can be used in OCaml
- ```
type person = {name : string; ss : (int * int * int); age : int};;
type person = { name : string; ss : int * int * int; age : int; }
```
- person is the type being introduced
  - name, ss and age are the labels, or fields

9/25/17

71

## Record Values

- Records built with labels; order does not matter
- ```
# let teacher = {name = "Elsa L. Gunter";
  age = 102; ss = (119,73,6244)};;
val teacher : person =
  {name = "Elsa L. Gunter"; ss = (119, 73, 6244); age = 102}
```

9/25/17

72

Record Pattern Matching

```
# let {name = elsa; age = age; ss =
      (_,_,s3)} = teacher;;
val elsa : string = "Elsa L. Gunter"
val age : int = 102
val s3 : int = 6244
```

9/25/17

73

Record Field Access

```
# let soc_sec = teacher.ss;;
val soc_sec : int * int * int = (119,
 73, 6244)
```

9/25/17

74

Record Values

```
# let student = {ss=(325,40,1276);
                 name="Joseph Martins"; age=22};;
val student : person =
  {name = "Joseph Martins"; ss = (325, 40,
  1276); age = 22}
# student = teacher;;
- : bool = false
```

9/25/17

75

New Records from Old

```
# let birthday person = {person with age =
                          person.age + 1};;
val birthday : person -> person = <fun>
# birthday teacher;;
- : person = {name = "Elsa L. Gunter"; ss =
  (119, 73, 6244); age = 103}
```

9/25/17

76

New Records from Old

```
# let new_id name soc_sec person =
  {person with name = name; ss = soc_sec};;
val new_id : string -> int * int * int -> person
-> person = <fun>
# new_id "Guieseppe Martin" (523,04,6712)
  student;;
- : person = {name = "Guieseppe Martin"; ss
  = (523, 4, 6712); age = 22}
```

9/25/17

77